



37 to 40 GHz Power Amplifier, 30 dB Gain, +27 dBm P_{1dB}

Description:

Model SBP-3734033027-KFKF-S1 is a power amplifier with a typical small signal gain of 30 dB and a nominal P_{1dB} of +27 dBm across the frequency range of 37 to 40 GHz. The DC power requirement for the amplifier is +8 V_{DC}/1,800 mA. The RF connectors are female K connectors. Other port configurations, such as male K connectors and WR-28 waveguides for either the input or output port, are also available under different model numbers.



Features:

- High Gain
- High Output Power

Applications:

- 5G System
- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	37 GHz		40 GHz
Gain		30 dB	
P _{1dB}		+27 dBm	
P _{sat}		+29 dBm	
P _{in}			-5 dBm
Input Return Loss		5 dB	
Output Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+15 V _{DC}
DC Supply Current		1,800 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Parameter	Connector
Input	K(F)
Output	K(F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	0.97 Oz
Size	1.99" (W) 1.20" (L) X 0.50" (H)
Outline	BG-SC-1






37 to 40 GHz Power Amplifier, 30 dB Gain, +27 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency

Bias = + 8 V_{DC}/1,800 mA

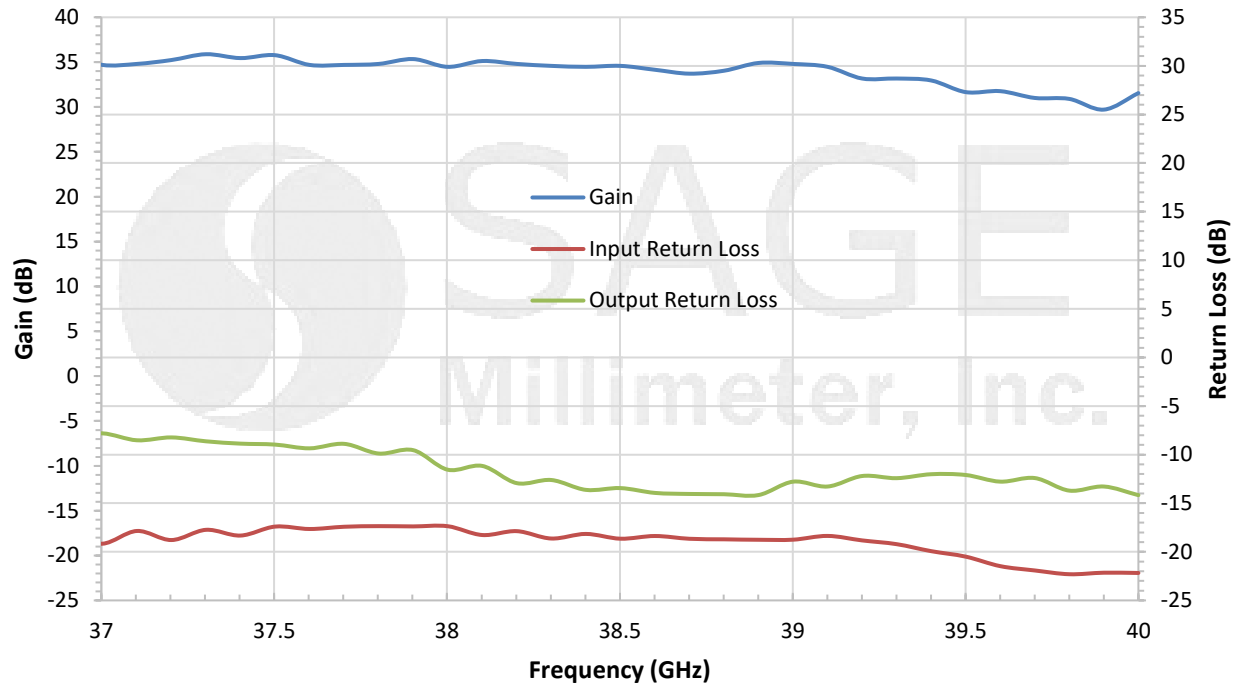

P_{1dB} vs. Frequency


Bias: +8 V_{DC}/1,800 mA

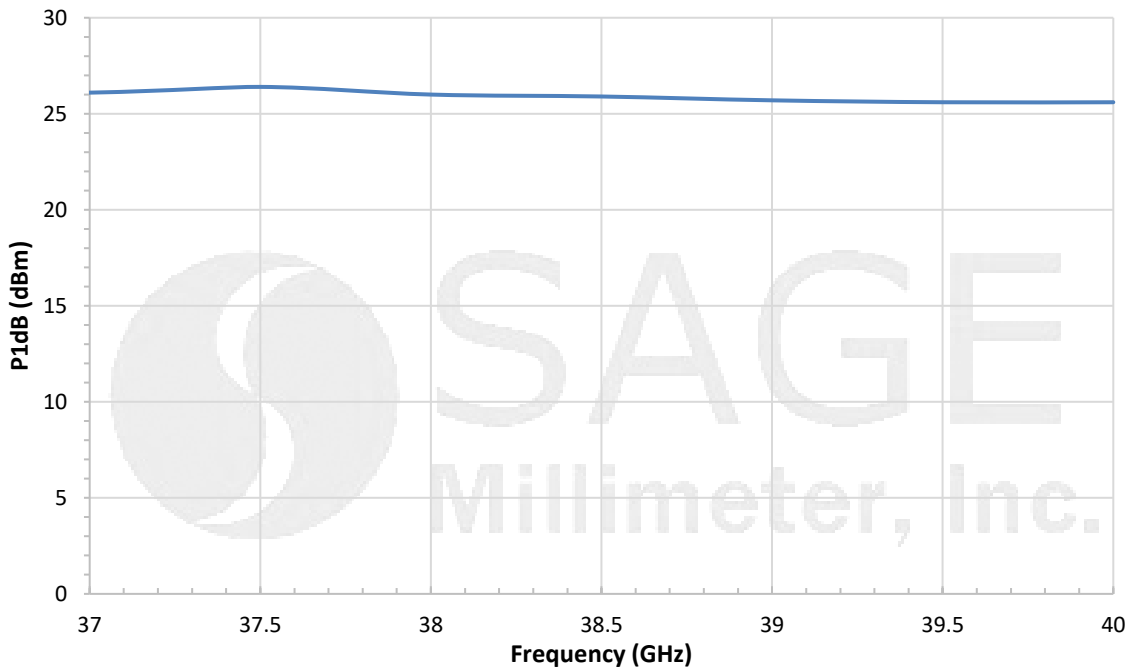



37 to 40 GHz Power Amplifier, 30 dB Gain, +27 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

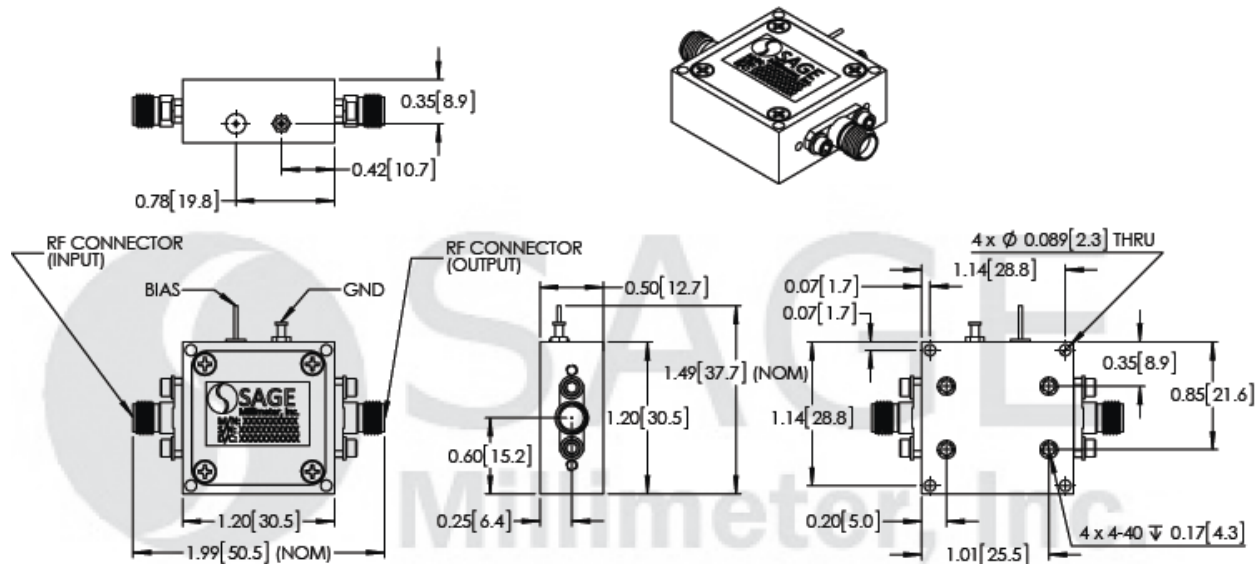

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50°C. Use proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

