

Q-Band Power Amplifier, 38 to 40 GHz, 40 dB Gain, +32 dBm P_{1dB}

Description:

Model SBP-3834034032-2222-E1 is a power amplifier with a typical small signal gain of 40 dB and a nominal P_{1dB} of +32 dBm across the frequency range of 38 to 40 GHz. The DC power requirement for the amplifier is +8 V_{DC}/2.4 A quiescent and 4.0 A under RF drive. The input and output port configurations are both WR-22 Uni-Guide™ waveguides. Other port configurations, such as 2.4 mm connectors or right angle WR-22 waveguides for either the input or output port, are also available under different model numbers.



Features:

- High Gain
- High Output Power

Applications:

- Radar Systems
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	38 GHz		40 GHz
Gain		40 dB	
P _{1dB}		+32 dBm	
P _{sat}		+34 dBm	
P _{in}			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V _{DC}	+9 V _{DC}
DC Supply Current (Quiescent)		2.4 A	
DC Supply Current (Under RF Drive)		4.0 A	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	WR-22 Uni-Guide™ Waveguide with UG-383/U Anti-Cocking Flange
Output Port	WR-22 Uni-Guide™ Waveguide with UG-383/U Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	2.0 Oz
Size	1.95" (L) X 1.20" (W) X 1.13" (H)
Outline	BG-SQ-2-A






Q-Band Power Amplifier, 38 to 40 GHz, 40 dB Gain, +32 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/2.4 A

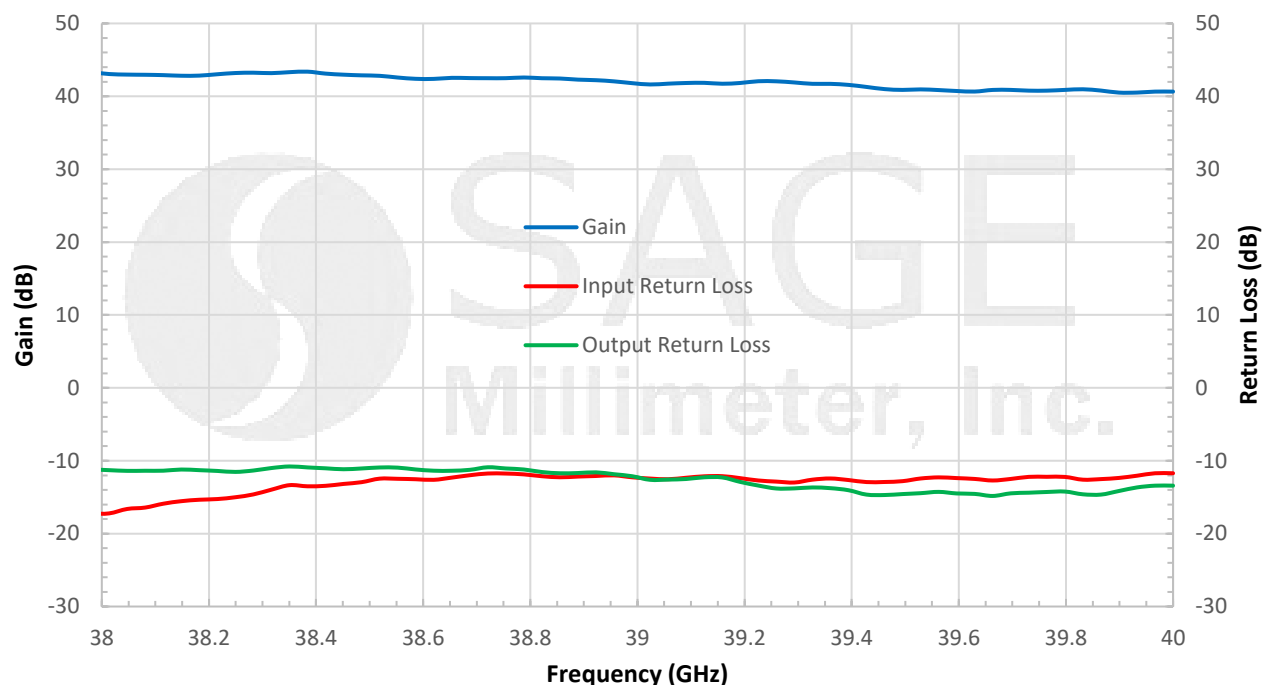


Typical P_{1dB} and P_{sat} vs. Frequency

Bias: +8 V_{DC}/4.0 A

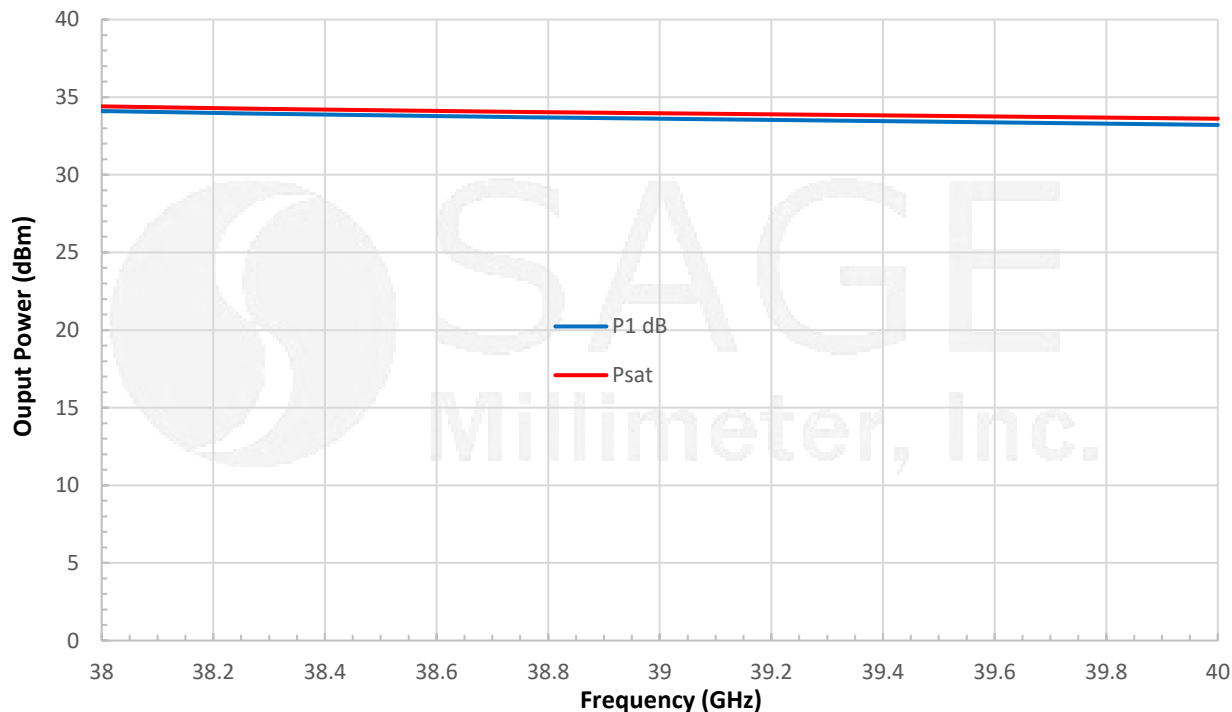

Q-Band Power Amplifier, 38 to 40 GHz, 40 dB Gain, +32 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

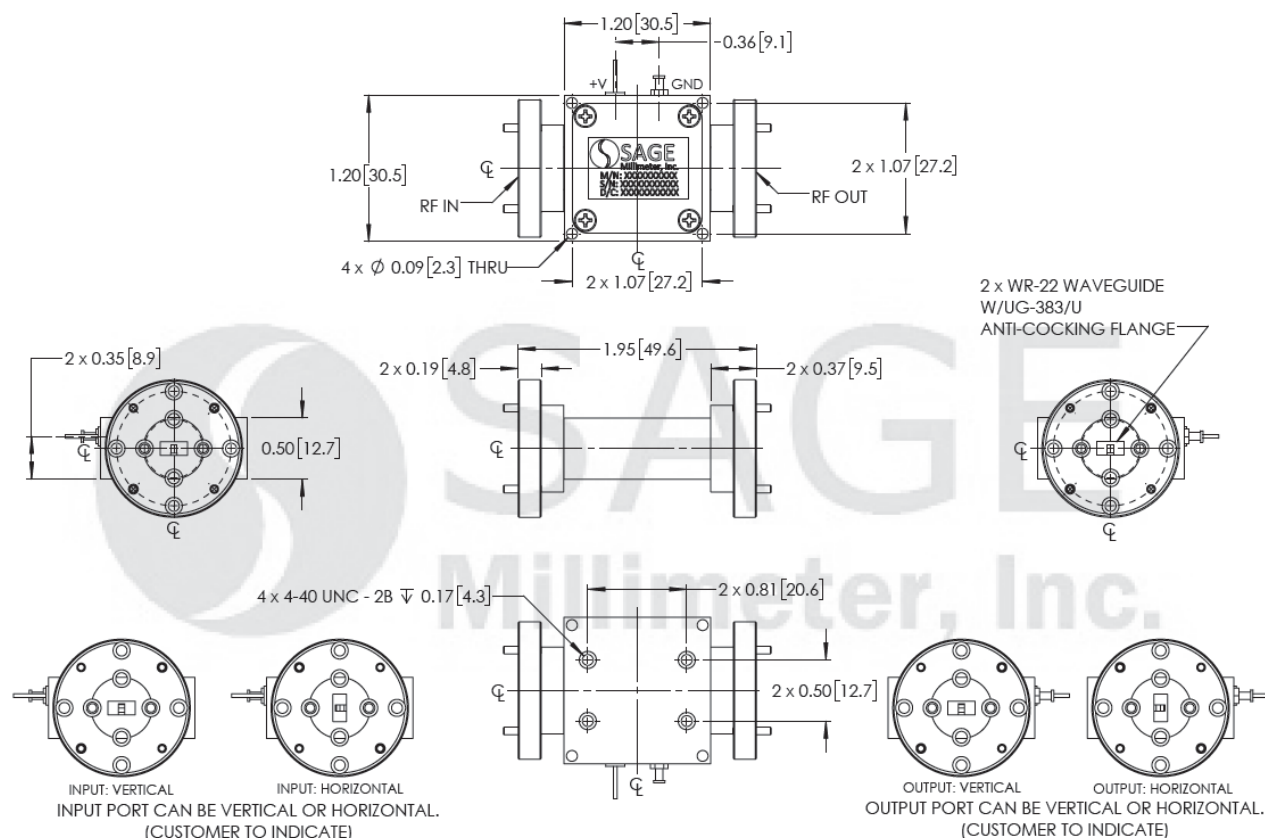

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- The amplifier employs SAGE Millimeter's trademarked and patent pending technology, the **Uni-Guide™**, as its waveguide interfaces. The orientation of the input and the output waveguides can be specified through corresponding model numbers. For example, the model number for a horizontal output waveguide configuration would be **SBP-3834034032-2222H-E1** instead of the default **SBP-3834034032-2222-E1** which indicates vertical orientation output.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

