

## Coaxial Receiver, 17 to 22 GHz, 3.5 dB Noise Figure, 10 dB Gain

## Description:

**Model SSR-2030533510-KF-SE1** is an integrated receiver module for communication system applications. The receiver has a typical conversion gain of 10 dB with a typical Noise Figure of 3.5 dB in the frequency range of 17 to 22 GHz. The required LO power is +5 dBm between frequencies of 8 and 12 GHz. The RF receive port is a 2.92 mm female connector while the LO and IF port is female SMA connectors. Other port configurations, are also available under different model numbers.



## Features:

- Good Gain Flatness and Noise Figure
- Built in x2 LO Multiplier
- Fully Integrated Module

## Applications:

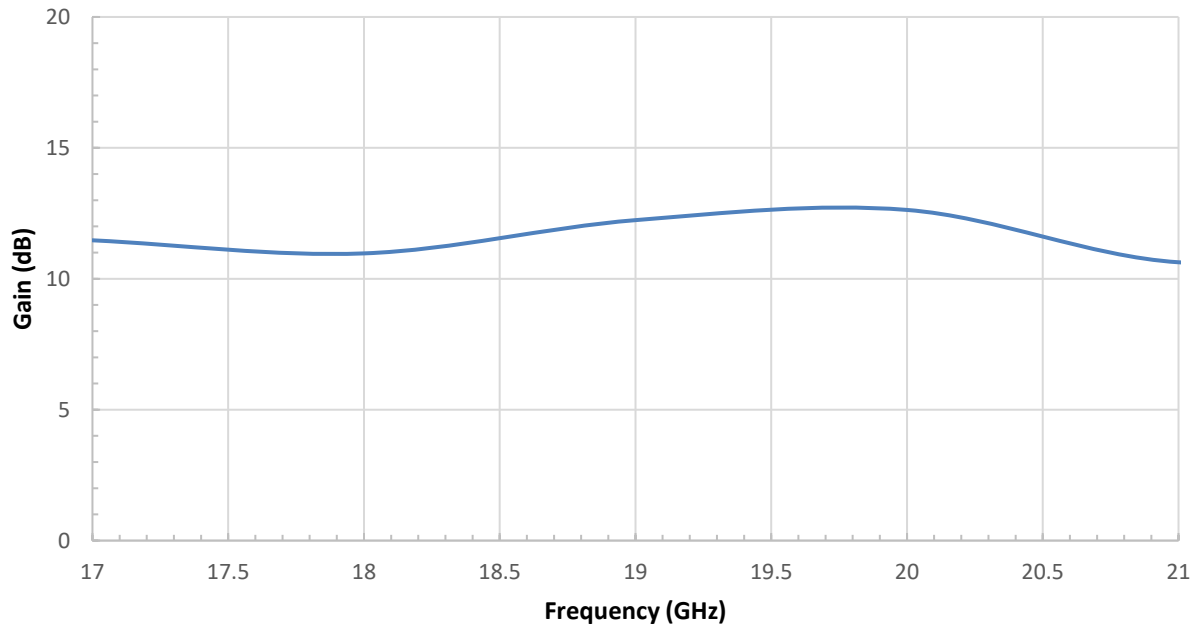
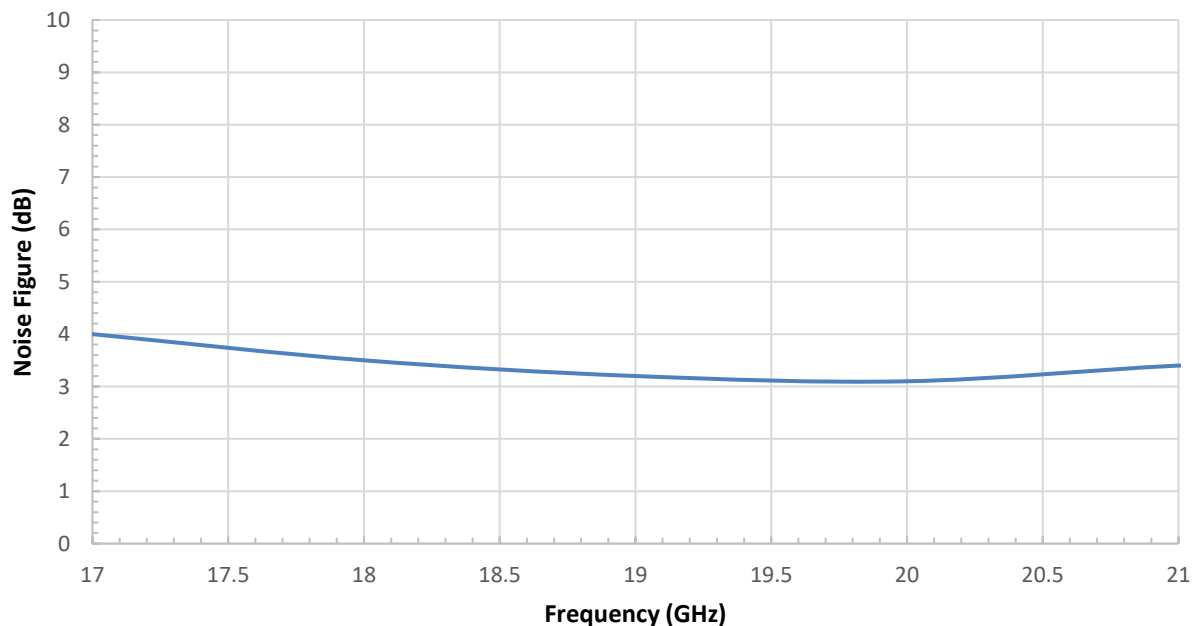
- 5G Systems
- Communication Systems

## Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Input Frequency	17 GHz		22 GHz
RF Input Power			+7 dBm
IF Output Frequency	DC		7 GHz
LO Frequency	8 GHz		12 GHz
LO Input Power		+5 dBm	+10 dBm
Conversion Gain		10 dB	
Noise Figure		3.5 dB	
Input P <sub>1dB</sub>		-20 dBm	
Bias Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+15 V <sub>DC</sub>
Bias Current		130 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

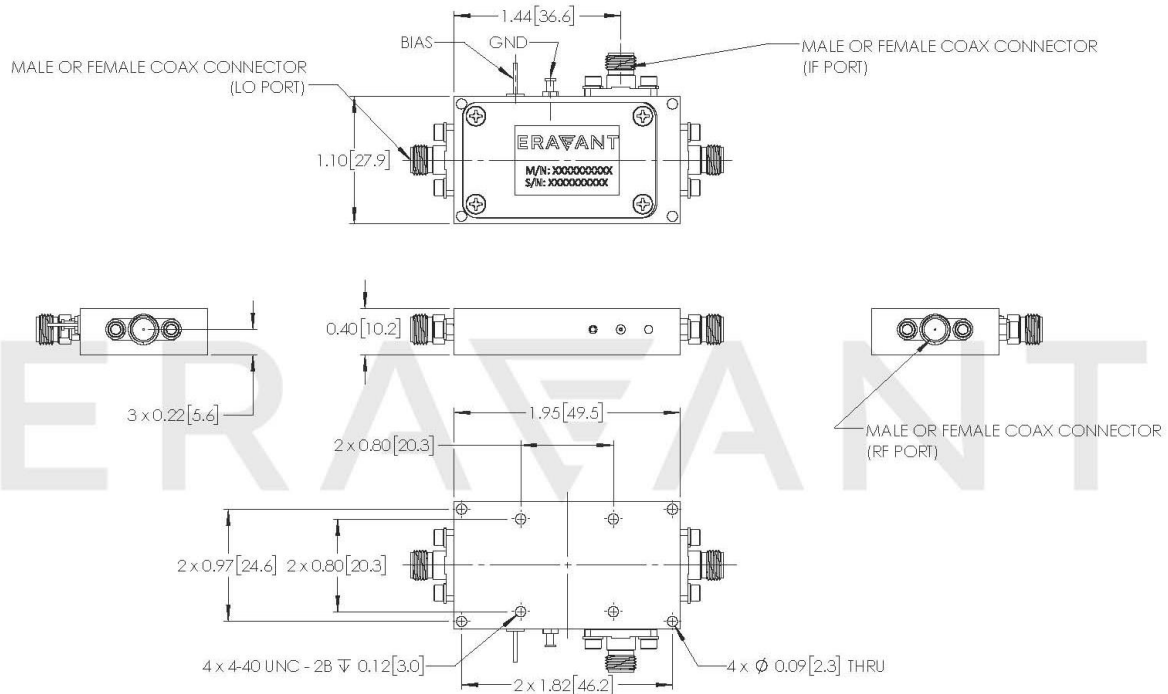
## Mechanical Specifications:

Item	Specification
RF Port	2.92 mm (F)
LO Port	SMA (F)
IF Port	SMA (F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	2.0 Oz
Size	1.10" (W) X 1.95" (L) X 0.40" (H)
Outline	SR-SC

**Coaxial Receiver, 17 to 22 GHz, 3.5 dB Noise Figure, 10 dB Gain****Gain vs. Frequency**Bias: +8 V<sub>DC</sub>/123 mA**Noise Figure vs. Frequency**Bias: +8 V<sub>DC</sub>/123 mA

## Coaxial Receiver, 17 to 22 GHz, 3.5 dB Noise Figure, 10 dB Gain

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])



### Note:

- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

### Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**