

## Ka-Band Level Setting Attenuator, Head Locking Screw, 24 to 44 GHz

### Description:

**Model STA-30-28-M1-WPC** is a Ka-band level setting attenuator that covers the frequency range of common 5G bands from 24 to 44 GHz. The attenuator features a precision micrometer dial with a knurled head locking screw, which allows for stable, repeatable settings that can be locked at any attenuation value. The level setting attenuator is an ideal piece of equipment in waveguide systems where broadband attenuation is required. The attenuator exhibits 0.4 dB typical insertion loss and up to 30 dB nominal attenuation value across the entire operating bandwidth. The other attenuator types, such as direct reading, programmable and fixed tuned attenuators are also available under different model numbers.



### Features:

- Broadband Coverage from 24 to 44 GHz
- Head Locking Screw
- Precision Machined Housing
- Convenient Level Setting

### Applications:

- 5G mmWave Systems
- Test Lab
- Instrumentations
- Manual Test Set

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	24 GHz		44 GHz
Insertion Loss		0.4 dB	
Attenuation		30 dB	
Return Loss		20 dB	
Power Handling		1 W (CW)	1.2 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


### Mechanical Specifications:

Item	Specification
RF Ports	WR-28 Waveguide with UG-599/U Flange
Setting Type	Head Locking Screw Type Micrometer
Insertion Length	3.00"
Material	Brass
Finish	Gold Plated
Weight	6.0 oz.
Outline	TA-MA




## Ka-Band Level Setting Attenuator, Head Locking Screw, 24 to 44 GHz

### Typical Measured Attenuation vs Frequency

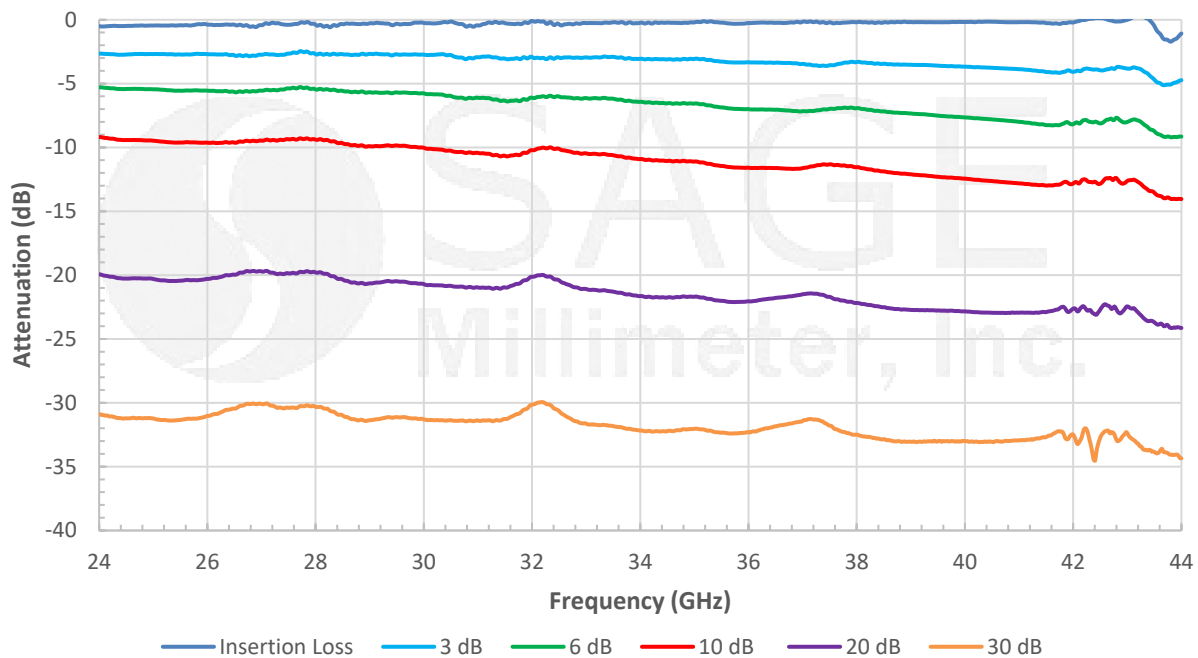

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

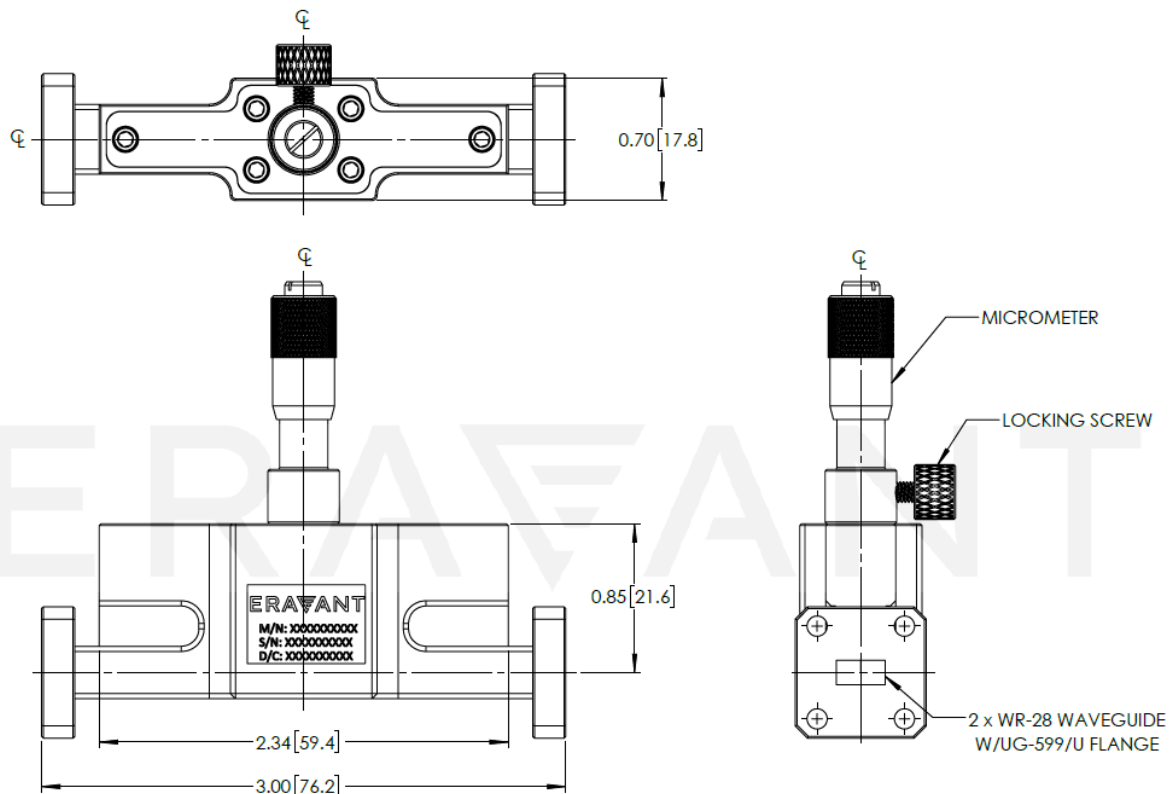



## Ka-Band Level Setting Attenuator, Head Locking Screw, 24 to 44 GHz

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- For more information on the technical details of level-setting attenuators and other types of waveguide attenuators, a short instructional blog is available here ([FIXED, LEVEL SETTING, DIRECT READING, AND PROGRAMMABLE ATTENUATORS](#))
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

### Caution:

- RF power should never exceed 1.2 W.
- Forcing the micrometer down after encountering resistance may damage the dielectric sheet inside. This will cause permanent performance degradation and decrease the long-term stability and repeatability of the device.
- Attempting to adjust the micrometer setting while the head locking screw is engaged may damage the micrometer and decrease the long-term stability and repeatability of the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

