

## SBP-7531143133-1010-C1-HR

**75 to 110 GHz, Power Amplifier, 31 dB Gain, +33 dBm  $P_{sat}$**

**SBP-7531143133-1010-C1-HR** is a W-Band, GaN power amplifier with a typical small signal gain of 31 dB and a nominal  $P_{sat}$  of +33 dBm across the frequency range of 75 to 110 GHz. The DC power requirement for the amplifier is +18 V<sub>DC</sub>/ 2.8 A. The mechanical configuration offers an in-line structure with WR-10 waveguides and UG-387/U-M anti-cocking flanges. A heat sink is included for cooling.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	75 GHz		110 GHz
Small Signal Gain		31 dB	
$P_{1dB}$		+25 dBm	
$P_{Sat}$		+33 dBm	
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+18 V <sub>DC</sub>	
DC Supply Current (Quiescent)		1.5 A	
DC Supply Current (Saturated)		2.8 A	
Fan DC Voltage		+12 V <sub>DC</sub>	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

### Mechanical Specifications:

Item	Specification
Input/Output Ports	WR-10 Rectangular Waveguide with UG-387/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Copper
Finish	Gold Plated, Black Anodize
Fan Connector	Molex 5051-03
Degree of Protection	IP40
Weight	28 oz
Size	3.15" (L) X 3.15" (W) X 3.73" (H)
Outline	BP-SW-2-H95-A

### ECCN

3A001.b.4

### FEATURES

- Forced Air Cooling
- In-line Port Configuration
- High Power Output


### APPLICATIONS

- Communications Systems
- Test Equipment
- Radar Systems

### SUPPLEMENTAL DETAILS

## SBP-7531143133-1010-C1-HR

**Mechanical Outline:** Unless otherwise specified, all dimensions are in inches [millimeters]

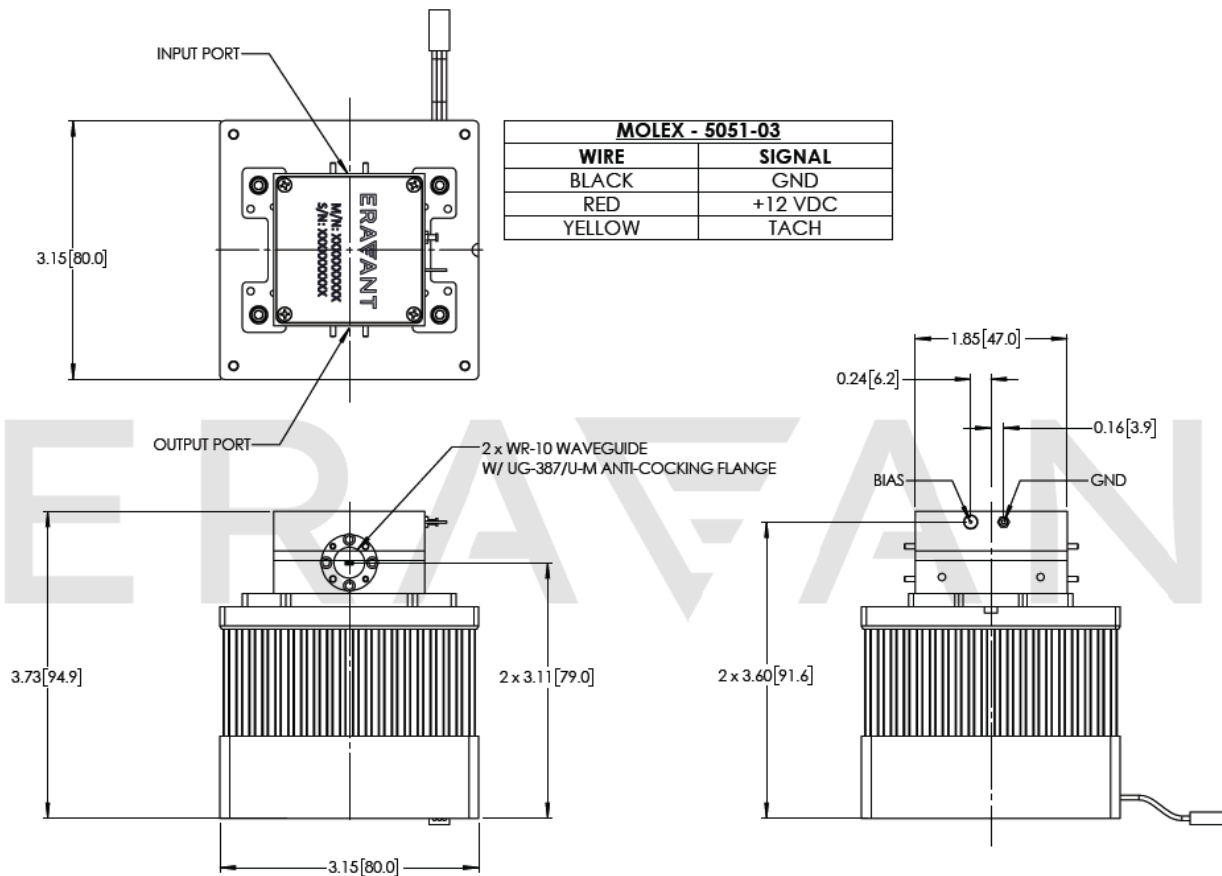

### NOTE:

- The product presented in this datasheet is at a preliminary design stage. Final electrical and mechanical specifications may differ than what is presented.
- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- Other mechanical configurations with other frequency bands are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +70°C.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.