



D-Band Full Waveguide Band Down-Converter

Description:

Model STC-20-06-S1 is a D-Band down-converter that converts millimeterwave signals from a frequency range of 110 to 170 GHz to the baseband at 10 MHz to 1.6 GHz. The down-converter requires 9.167 to 14.167 GHz at +5 dBm input power, which can be obtained from a standard 20 GHz synthesizer, such as Eravant model [SOT-02220313200-SF-B6](#). The down-converter has low harmonic levels and excellent gain flatness, making it a good candidate to extend low frequency test equipment for millimeterwave testing purposes.



Features:

- Full Band Coverage
- -5 dBm Nominal Input P_{-1dB}
- 15 dB Typical Noise Figure

Applications:

- Test Lab
- Instrumentations
- Auto Test Set

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Input Frequency	110 GHz		170 GHz
IF Frequency Output	10 MHz		1.6 GHz
LO Input Frequency	9.167 GHz		14.167 GHz
LO Power		+0 dBm	+10 dBm
Conversion Gain		20 dB	
Harmonic Suppression		20 dB	
LO or RF Input Power Damage Level			+18 dBm
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
RF Port	WR-06 Waveguide with UG387/U-M Flange
LO Port	SMA (F)
IF Port	SMA (F)
DC Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
DC Bias Switch	On-Off Rocker Switch with Indicator Light
Enclosure Material	Extruded Aluminum Finish Black Anodized
Weight	3.2 lb
Size	6.15" (W) x 8.86" (L) x 3.20" to 5.82" (H)
Outline	TC-D







D-Band Full Waveguide Band Down-Converter

Typical Conversion Gain vs. RF Frequency

IF: 1 GHz; RF: -20 dBm, LO: 0 dBm

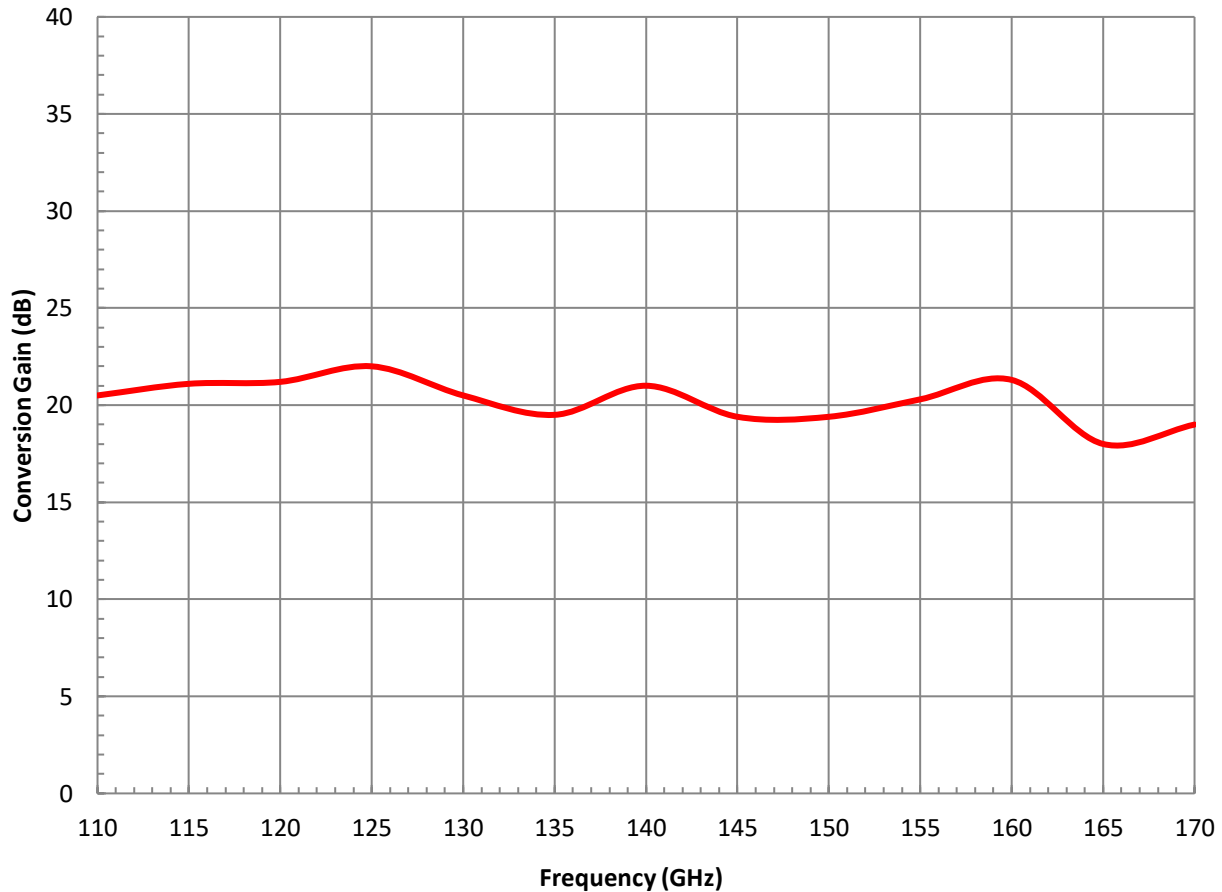


Block Diagram:

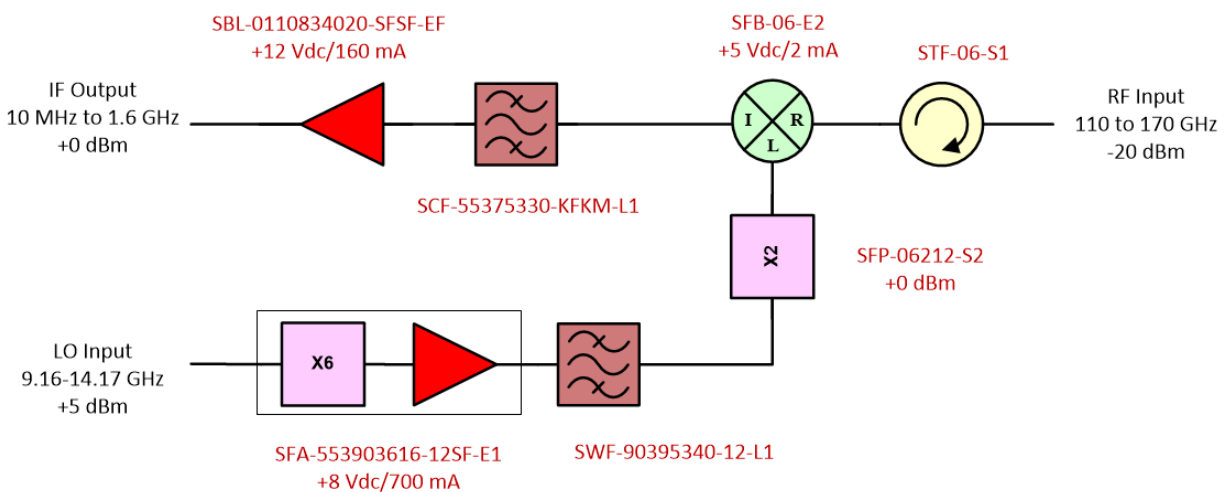



D-Band Full Waveguide Band Down-Converter

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

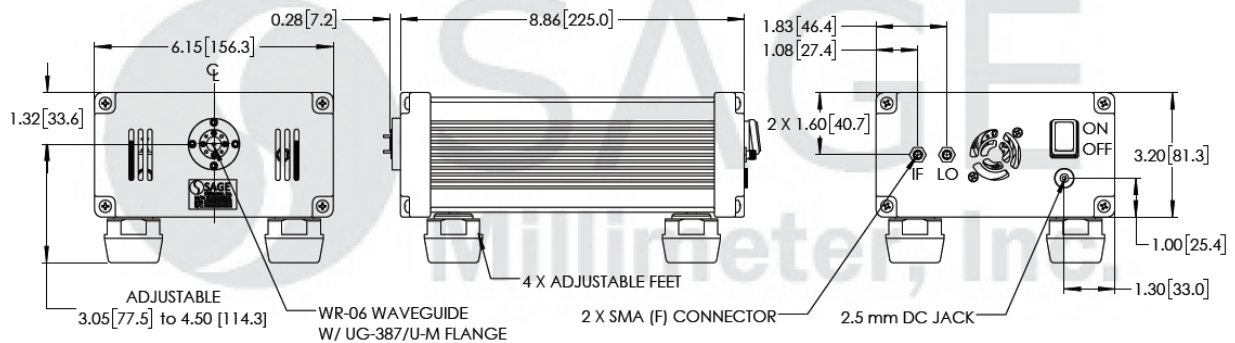

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the device will damage the device.
- Proper torque, 8.0 ± 0.4 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will cause performance degradation or damage the device.

