

Ka-Band Full Waveguide Band Down-Converter

STC-N10-28-S1 is a Ka-Band down-converter that converts millimeter wave signals from a frequency range of 26 to 40 GHz to the baseband at 1.6 GHz. The down-converter requires 6.5 to 10 GHz at +5 dBm input power as its LO. The down-converter has low harmonic levels and excellent gain flatness, making it a good candidate to extend low frequency test equipment for millimeter wave testing purposes.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Input Frequency	26 GHz		40 GHz
IF Frequency Output	10 MHz	1.6 GHz	12 GHz
LO Input Frequency	6.5 GHz		10 GHz
LO Power		+5 dBm	+10 dBm
Conversion Loss		10 dB	
Harmonic Suppression		20 dB	
RF Input Power Damage Level			+20 dBm
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25°C	
Operating Temperature	-0°C		+50°C

Mechanical Specifications:

Item	Specification
RF Port	WR-28 Waveguide with UG-599/U Compatible Flange
LO Port	SMA (F)
IF Port	SMA (F)
DC Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
DC Bias Switch	On-Off Latching Switch with Indicator Light
Enclosure Material	Black Anodized Aluminum
Weight	2.3 lbs
Size	4.89" (W) x 5.00" (L) x 1.90" (H)
Outline	TC-A-2

ECCN

EAR99

FEATURES

- Full Band Coverage

APPLICATIONS

- Test Lab
- Instrumentations
- Auto Test Set


SUPPLEMENTAL DETAILS




STC-N10-28-S1

Conversion Loss vs. Frequency

RF: -20 dBm

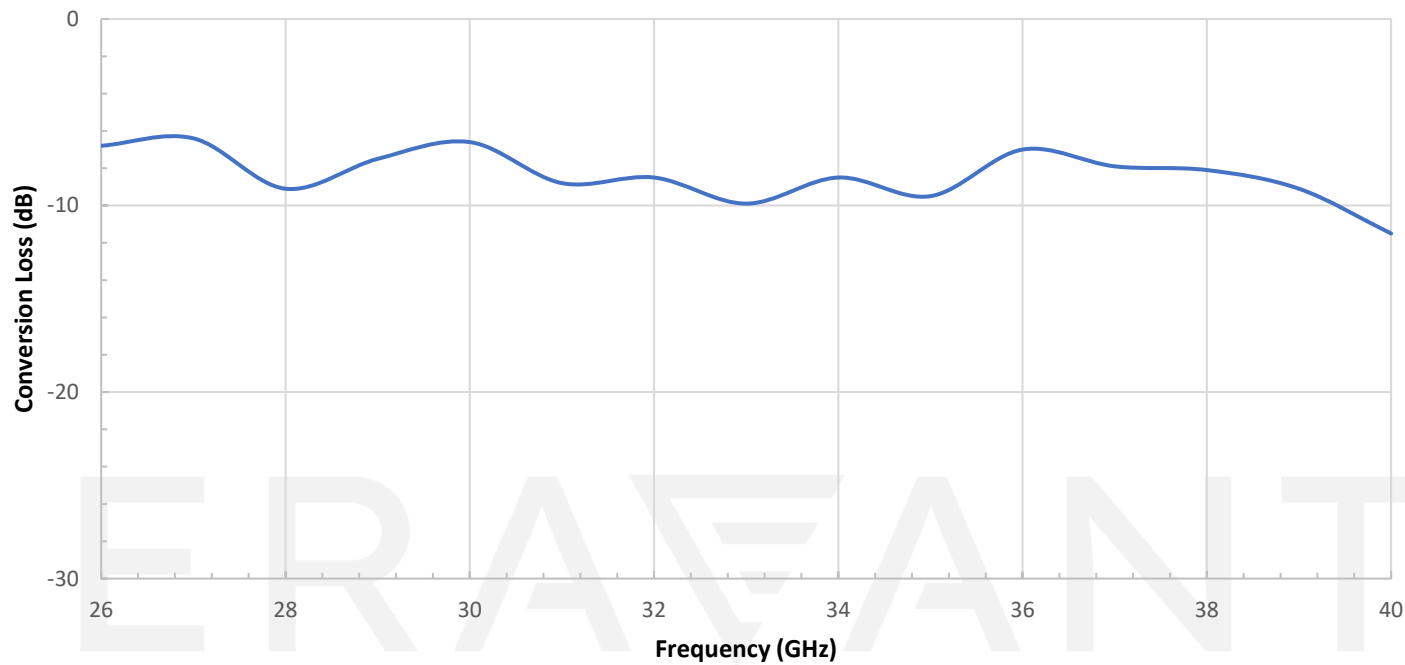

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

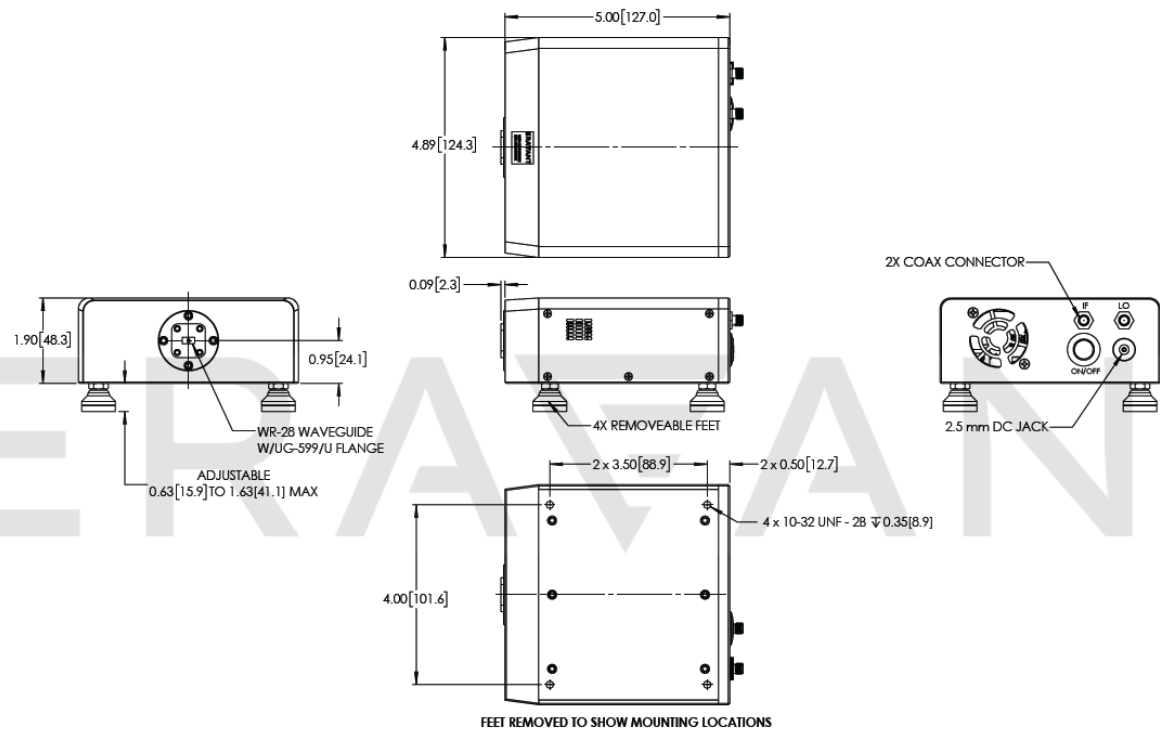

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE