

V-Band Full Waveguide Band Down-Converter

STC-N12-15-S1 is a V-Band down-converter that converts millimeter wave signals from a frequency range of 50 to 75 GHz to the baseband at 1.6 GHz. The down-converter requires 12.5 to 18.75 GHz at +3 dBm input power as its LO. The down-converter has low harmonic levels and excellent gain flatness, making it a good candidate to extend low frequency test equipment for millimeter wave testing purposes.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Input Frequency	50 GHz		75 GHz
IF Frequency Output	10 MHz	1.6 GHz	18 GHz
LO Input Frequency	12.5 GHz		18.75 GHz
LO Power		+3 dBm	+20 dBm
Conversion Loss		12 dB	
Harmonic Suppression		20 dB	
RF Input Power Damage Level			+5 dBm
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Item	Specification
RF Port	WR-15 Waveguide with UG-385/U-M Precision Anti-Cocking Flange
LO Port	SMA (F)
IF Port	SMA (F)
DC Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
DC Bias Switch	On-Off Latching Switch with Indicator Light
Enclosure Material	Black Anodized Aluminum
Weight	2.3 lbs
Size	4.89" (W) x 5.00" (L) x 1.90" (H)
Outline	TC-V-A

ECCN

EAR99

FEATURES

- Full Band Coverage

APPLICATIONS

- Test Lab
- Instrumentations
- Auto Test Set


SUPPLEMENTAL DETAILS




STC-N12-15-S1

Conversion Loss vs. Frequency

LO: +3 dBm

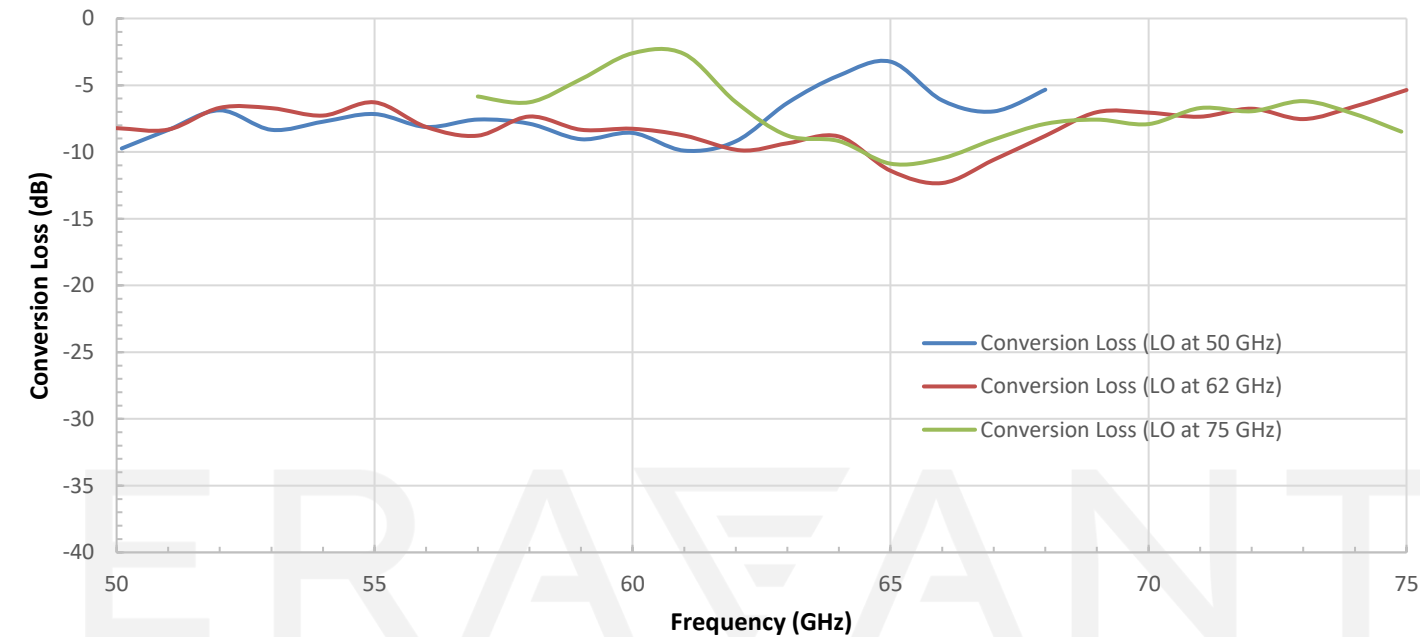

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

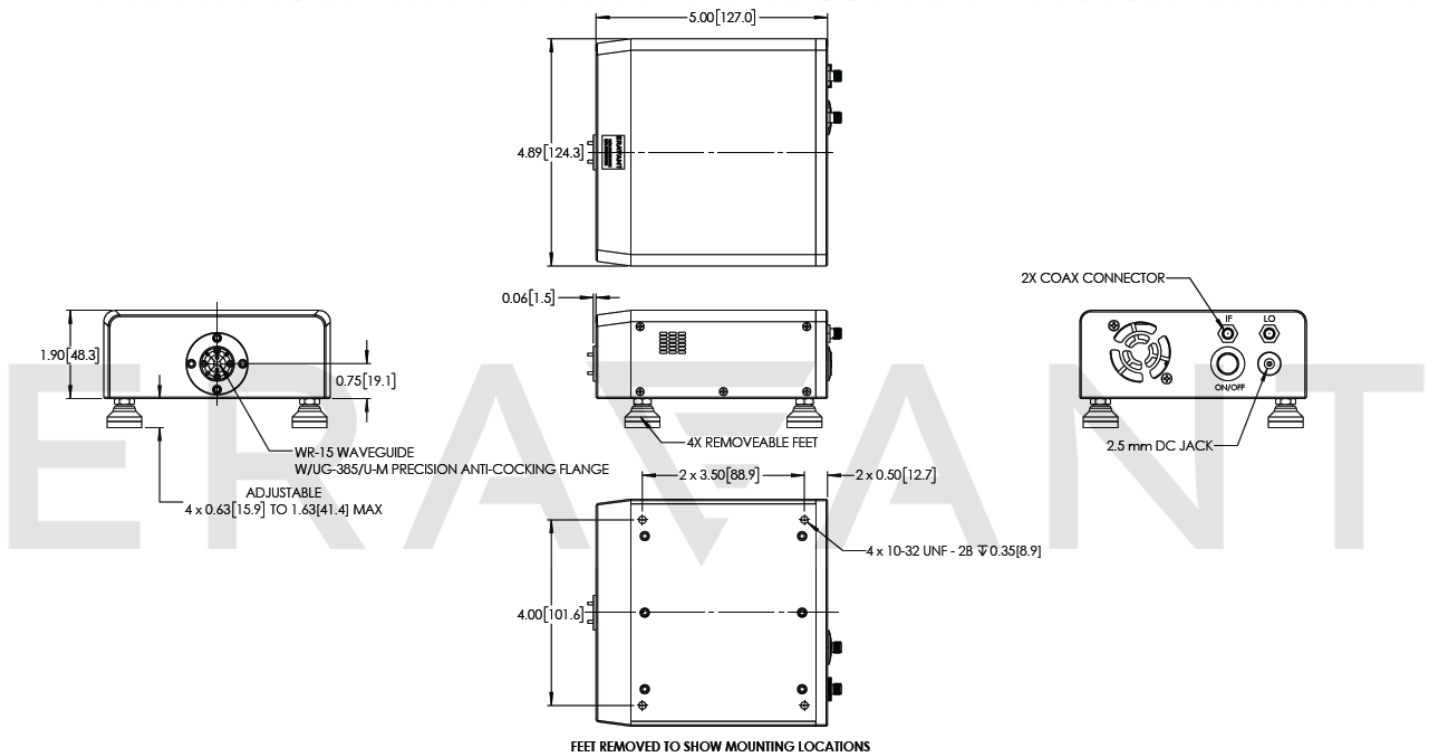

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE