

STC-N18-06-S1-IDP

D-Band Full Waveguide Band Down-Converter

STC-N18-06-S1-IDP is a D-Band down-converter that converts sub-THz wave signals from a frequency range of 110 to 170 GHz to the baseband at 1.875 GHz. The down-converter requires 6.11 to 9.44 GHz at +10 dBm input power as its LO. An internal diplexer is included resulting in a single connectorized port for LO and IF configured for compatible spectrum analyzers, such as [Anritsu's MS2850A](#). The down-converter has low harmonic levels and excellent gain flatness, making it a good candidate to extend low frequency test equipment for millimeter wave testing purposes.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Input Frequency	110 GHz		170 GHz
IF Frequency Output	10 MHz	1.875 GHz	2 GHz
LO Input Frequency	6.11 GHz		9.44 GHz
LO Power	+10 dBm		+12 dBm
LO Damage Power			+20 dBm
Conversion Loss		18 dB	
Harmonic Suppression		-20 dBc	
RF Input Power Damage Level			+10 dBm
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
RF Port	WR-06 Waveguide with UG-387/U-M Precision Anti-Cocking Flange
LO/IF Port	SMA (F)
DC Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
DC Bias Switch	On-Off Latching Switch with Indicator Light
Enclosure Material	Black Anodized Aluminum
Weight	2.3 lbs
Size	4.89" (W) x 5.00" (L) x 1.90" (H)
Outline	TC-D-A-IDP

ECCN

3A001.b.7

FEATURES

- Full Band Coverage


APPLICATIONS

- Test Lab
- Instrumentations
- Auto Test Set
- [Anritsu MS2850A](#)

SUPPLEMENTAL DETAILS



Simplified Block Diagram:

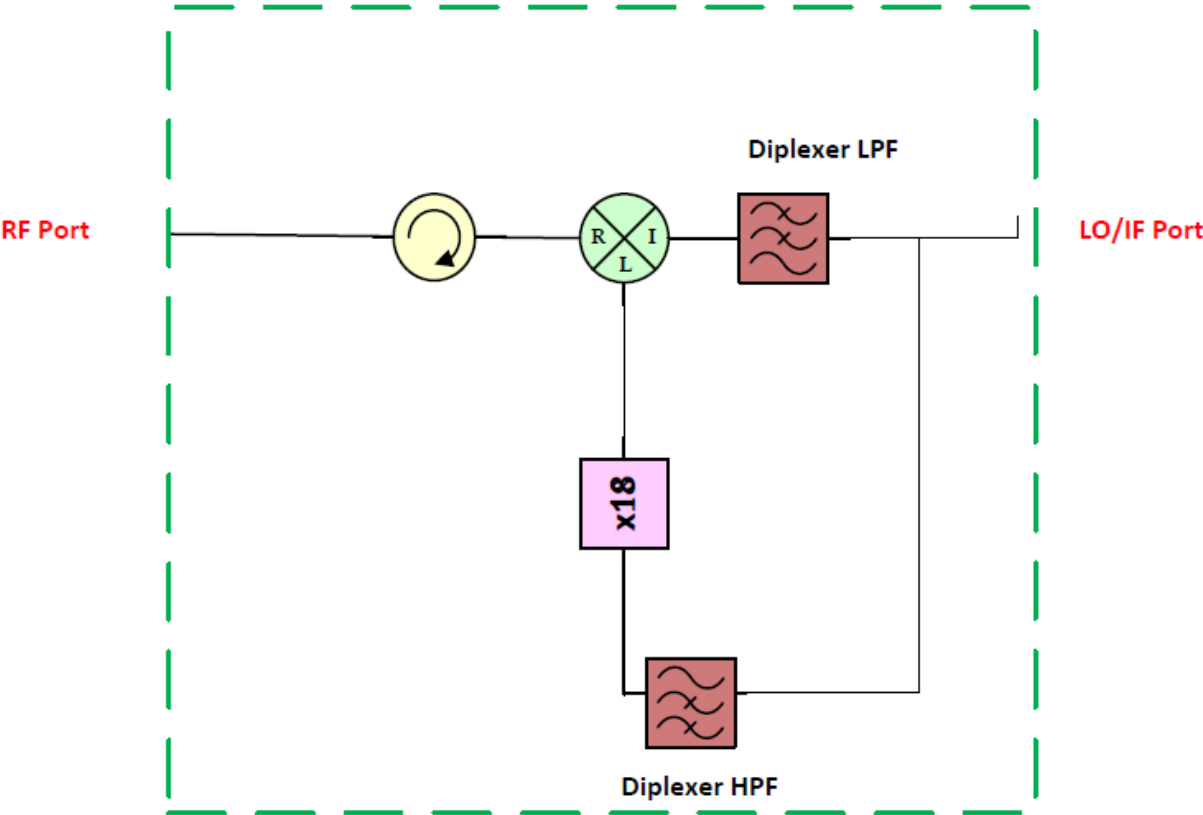


ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE

STC-N18-06-S1-IDP

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

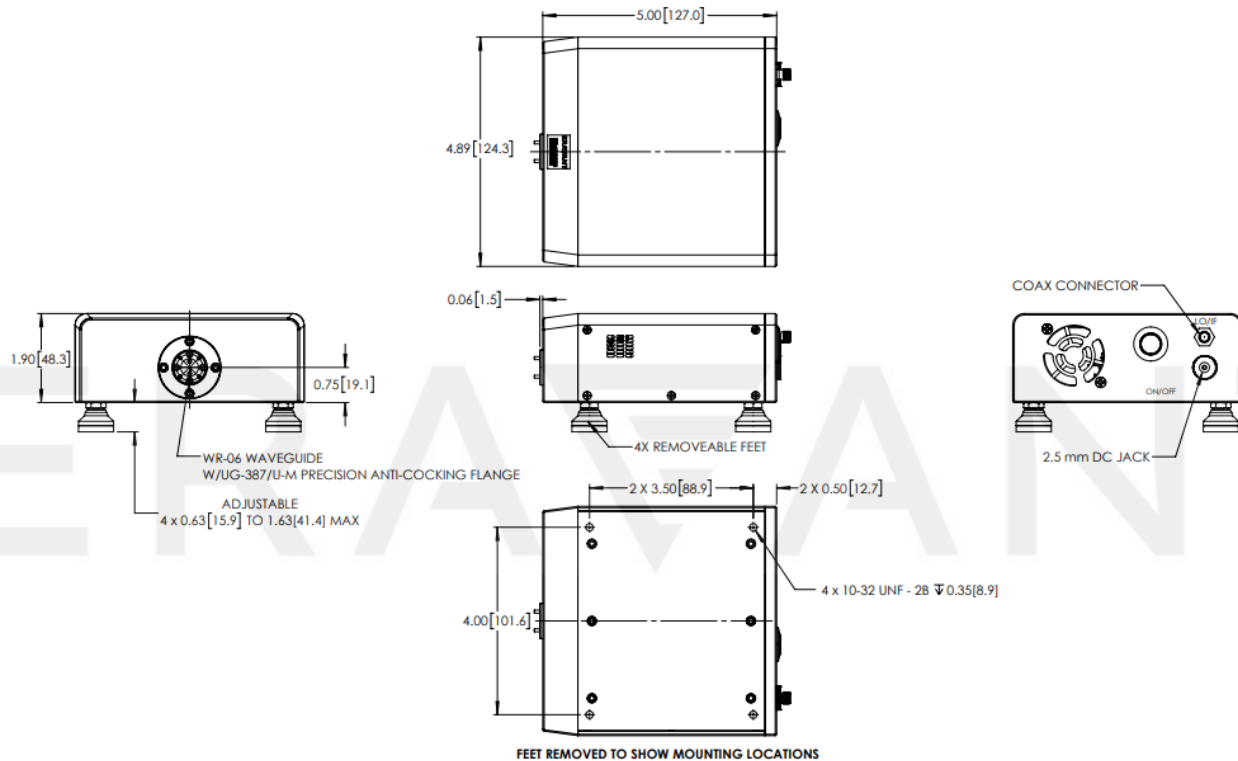

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.