

3.5 mm Coaxial Fixed Attenuator, 3 dB Attenuation, Thermal Vacuum Safe

SCA-03-3M3F-SD-V is a thermal vacuum safe, 3 dB coaxial attenuator that is used in millimeterwave systems and operates from DC to 33 GHz. The attenuator has a typical attenuation value of 3 dB across the frequency range. While the attenuator is designed and fabricated for full 3.5 mm coaxial band applications, the attenuation value of this model will have a wide range due to its broadband coverage. Various attenuation values are available under different model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	DC		33 GHz
Attenuation		3 dB	
Attenuation Accuracy		±0.8 dB	
Return Loss		20 dB	
Power Handling*			2 W (CW)
Impedance		50 Ω	
Specification Temperature		+25 °C	
Operating Temperature	-55 °C		+125 °C

\*2 W average to 25 °C ambient temperature, derated linearly to 0.5 W @ 125 °C  
\*20 W @ 5µs pulse width with maximum 0.5% duty cycle

Mechanical Specifications:

Item	Specification
Connector 1 Type	3.5 mm Male
Connector 2 Type	3.5 mm Female
Body Material	Stainless Steel
Body Finish	Passivated
Connector Pin Material	Beryllium Copper
Connector Pin Finish	Gold Plated
Insulator Material	PEI
Weight	0.3 Oz
Length	0.83"
Outline	CA-3-V-9

ECCN  
EAR99

FEATURES

- Thermal Vacuum Safe
- Broadband Coverage
- Low Cost

APPLICATIONS


- Thermal Vacuum Chamber / Vacuum Environment Testing
- Test Lab
- Instrumentations
- System Integration

SUPPLEMENTAL DETAILS




SCA-03-3M3F-SD-V

Typical Performance vs. Frequency

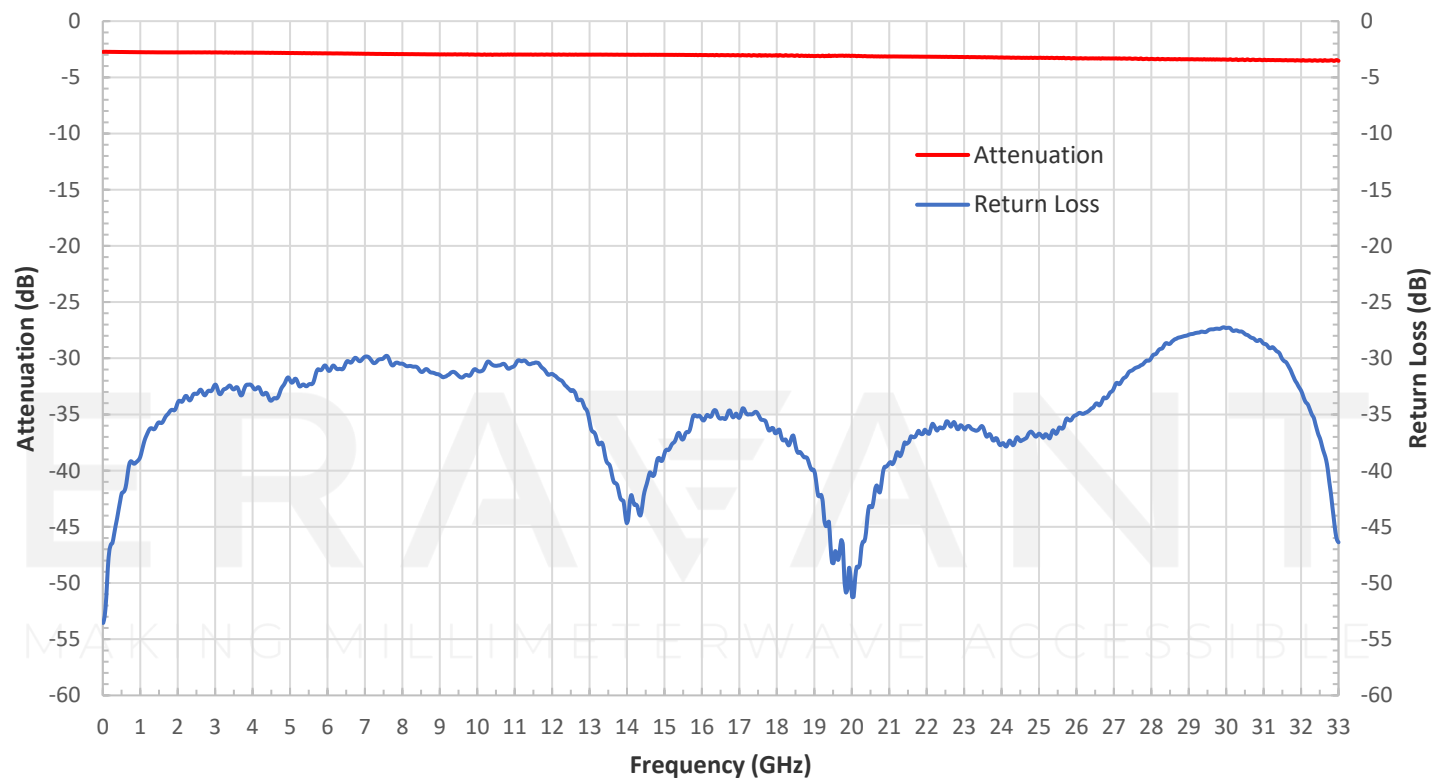

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

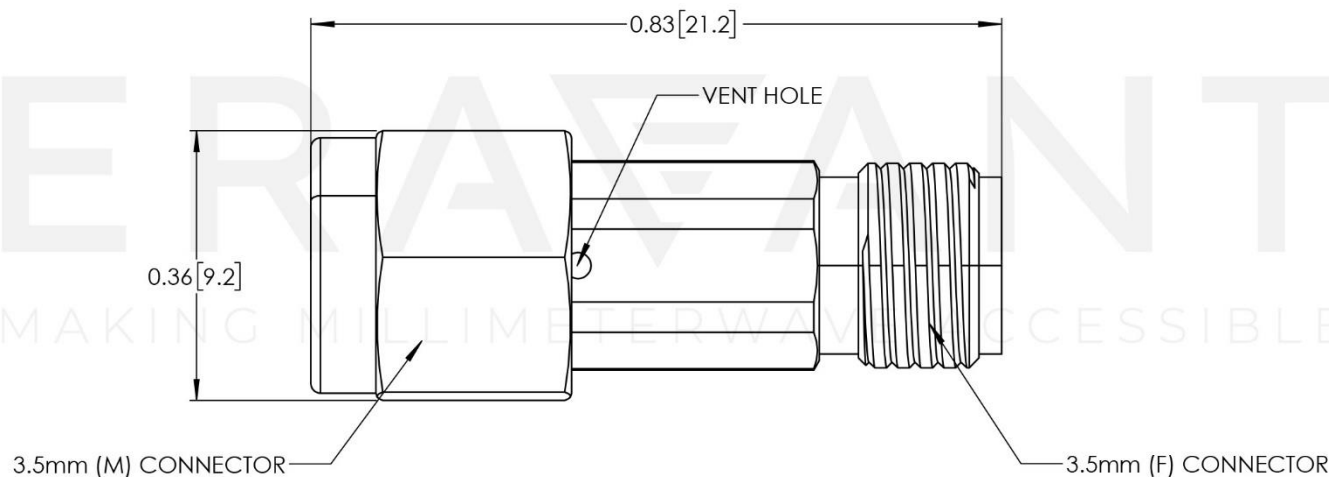

**NOTE:**

- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model SCH-08008-S1 is highly recommended.

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE