



Q-Band Faraday Isolator

Description:

Model STF-22-S1 is a full band Faraday isolator that operates from 33 to 50 GHz. The Faraday isolator is constructed with a longitudinal, magnetized ferrite rod that causes a Faraday rotation of the incoming RF signal. The Faraday isolator offers 30 dB typical isolation and 1.2 dB nominal insertion loss with good flatness. The return loss of the isolator is 14 dB. The input and output ports are WR-22 waveguides with UG-383/U flanges.



Features:

- Full Waveguide Band Operation
- Moderate Insertion Loss
- High Isolation
- Instrumentation Grade

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Insertion Loss		1.2 dB	1.4 dB
Isolation	25 dB	30 dB	
Return Loss		14 dB	
Power Handling		1.5 W (CW)	2.0 W (CW)
Specification Temperature		+25 °C	
Operation Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Input Port	WR-22 Waveguide with UG-383/U Flange
Output Port	WR-22 Waveguide with UG-383/U Flange
Waveguide Flange Material	Brass
Waveguide Flange Finish	Gold Plated
Cover Material	Aluminum
Cover Finish	Black Anodized
Weight	5.0 Oz
Insertion Length	2.69"
Outline	TF-SQ






Q-Band Faraday Isolator

Typical Performance vs. Frequency

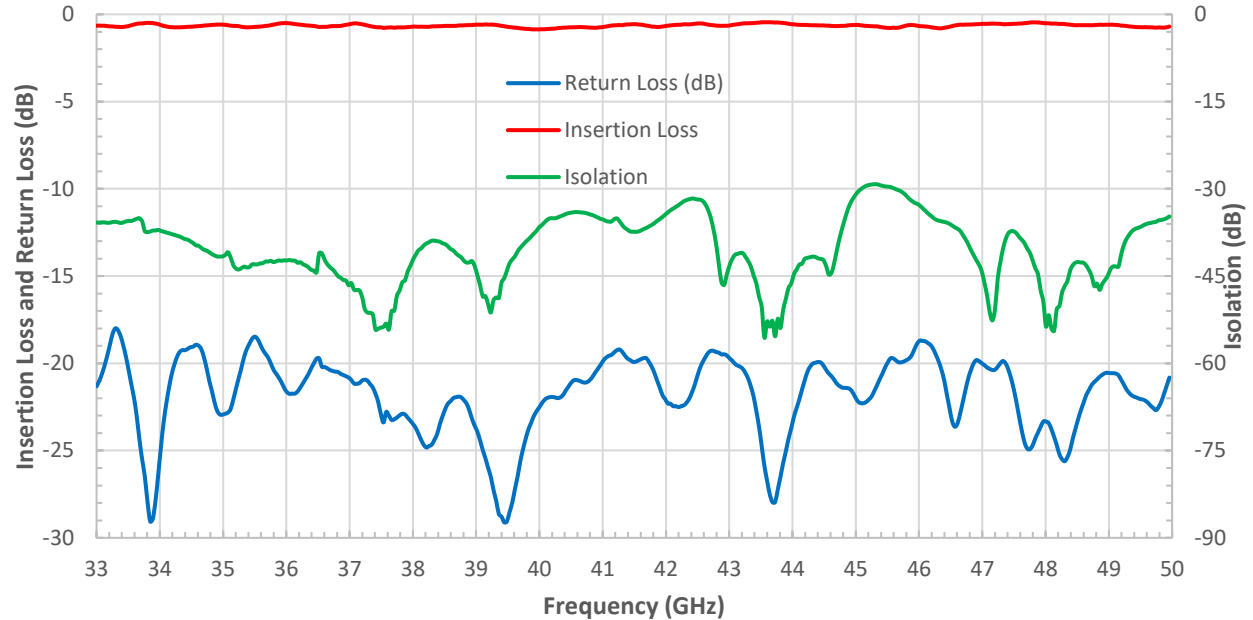

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

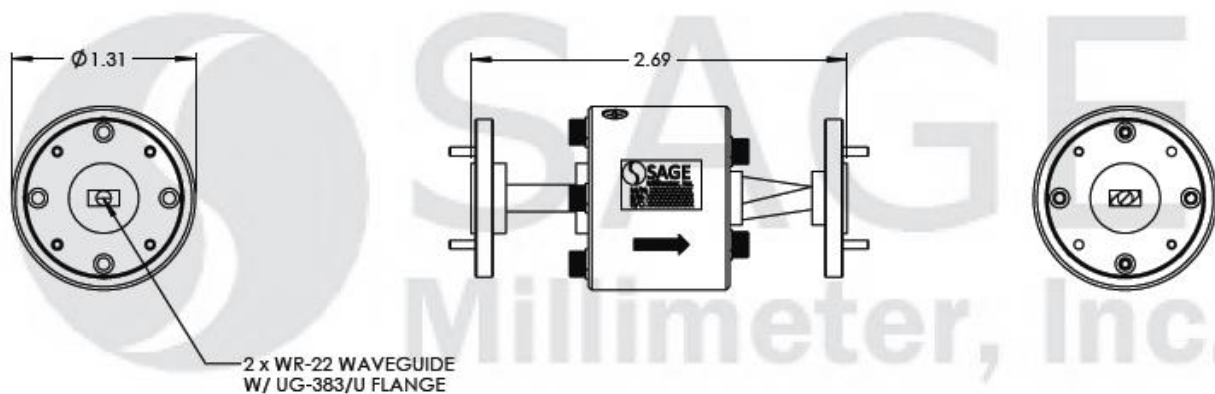

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25°C case temperature.
- The model with orthogonal input and output ports is offered under model number **STF-22-91**.
- The compact version is offered under model number **STF-22-S1-C**.
- Other custom mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- The device is sensitive to magnetic fields. Always keep magnet fields 6 inches away.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com