

STR-793-12-L1

Radar Target Simulator, Level Setting

STR-793-12-L1 is a radar doppler simulator that operates at 78.5 GHz with a bandwidth of ± 2.5 GHz and a WR-12 waveguide input/output. The simulator utilizes a single-sideband-modulator to modulate the incoming signal transmitted by the radar under test and sends back either a higher or lower band signal through a diplexer. The frequency-shifted signal is transmitted back to the radar under test as the Doppler signal. Target characteristics can be adjusted by changing the I and Q channel frequency and phase. **Siglent's SDG1032X Waveform Generator** or equivalent is recommended. The routing attenuation is adjusted by the level setting attenuator, which can be calibrated to simulate the radar cross section (RCS).



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		78.5 GHz	
RF Bandwidth		± 2.5 GHz	
Carrier Rejection		30 dB	
Image Rejection		20 dB	
Routing Loss Range		30 to 80 dB	
I/Q Frequency Range	DC		250 MHz
I/Q Voltage		± 10 V _{P-P}	± 12 V _{P-P}
I/Q Current		± 2.5 mA	± 5 mA
I/Q Phase Error		$\pm 5^\circ$	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
RF Ports	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
I/Q Ports	SMA (F)
Case Finish	Black Anodized
Size	7.56" (W) x 4.89" (L) x 1.90" (H)
Outline	TR-EL-2

ECCN

EAR99

FEATURES

- Single Sideband Output
- Simulated Target Speed and Size Adjustable
- Simulated Target Moving Direction Switchable
- Instrumentation Grade

APPLICATIONS

- Doppler Target Simulations
- Radar Systems Testing


SUPPLEMENTAL DETAILS



STR-793-12-L1

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

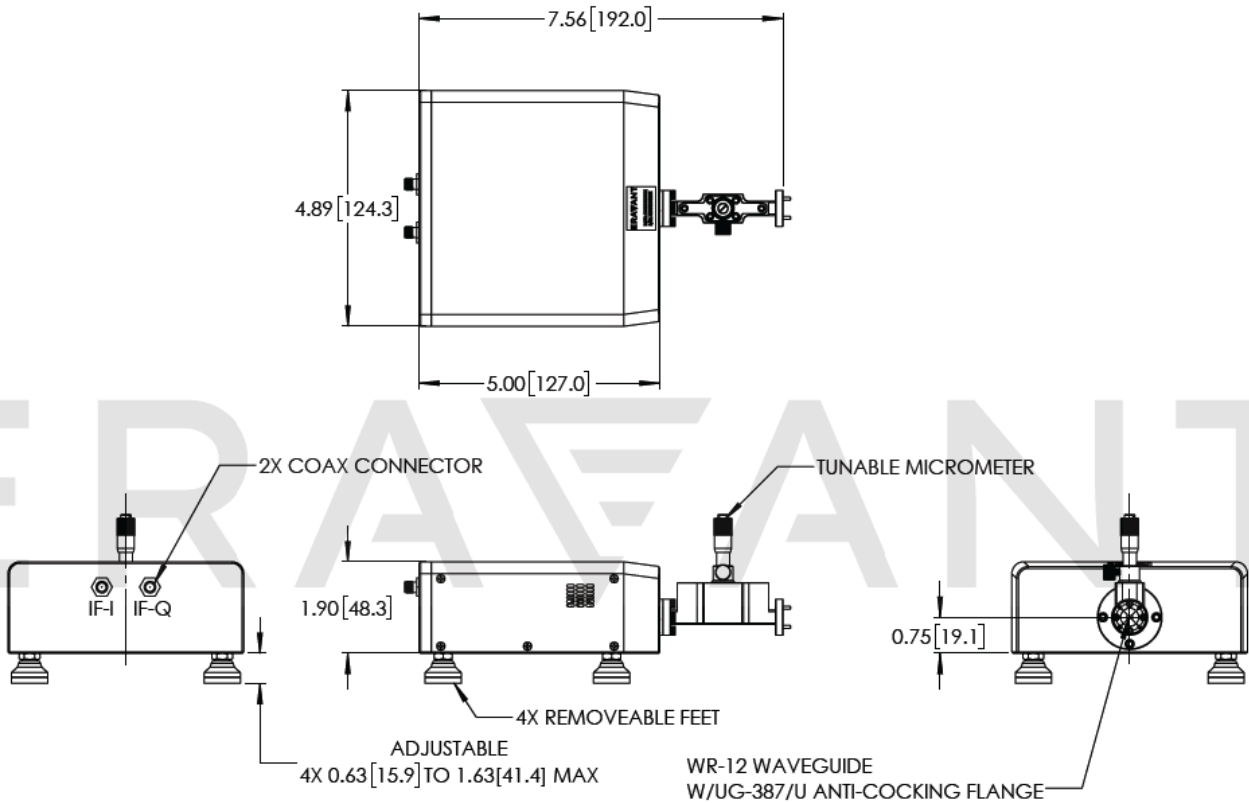

NOTE:

- Eravant reserves the right to change the information presented without notice.
- Models with different operation frequencies are available under different model numbers.
- A Radar Target Simulator with a direct reading attenuator, instead of a level setting attenuator, is available as model **STR-793-12-D1**.
- Eravant has performed test and recommends **Siglent's SDG1032X Waveform Generator** or equivalent in combination with our Radar Target Simulators.

CAUTION:

- Exceeding absolute maximum ratings of the device will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.02 Nm), should be applied. Eravant torque wrench, model **SCH-08008-S1**, is highly recommended.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

MAKING MILLIMETERWAVE ACCESSIBLE