

STV-00-28-S1

Ka-Band Full Waveguide Band Up-Converter

STV-00-28-S1 is a Ka-Band up-converter that converts IF signals from a frequency range of DC to 13.5 GHz with -5 dBm power to the millimeterwave frequency at 26.5 to 40 GHz. The up-converter requires 13 to 20 GHz at 0 dBm input power as its LO, which can be obtained from a standard 20 GHz synthesizer, such as Eravant model **SOT-02220313200-SF-B6**. The up-converter has low harmonic levels and excellent gain flatness, making it a good candidate to extend low frequency test equipment from millimeterwave testing purposes.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
IF Input Frequency	DC	1 GHz	13.5 GHz
IF Input Power		-5 dBm	+15 dBm
RF Output Frequency	26.5 GHz		40 GHz
LO Input Frequency	13 GHz		20 GHz
LO Power		0 dBm	+20 dBm
Conversion Loss		10 dB	
Harmonic Suppression		20 dB	
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Item	Specification
RF Port	WR-28 Waveguide with UG-599/U Compatible Flange
LO Port	SMA (F)
IF Port	SMA (F)
DC Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
DC Bias Switch	On-Off Latching Switch with Indicator Light
Enclosure Material	Black Anodized Aluminum
Weight	2.3 lbs
Size	4.89" (W) x 5.00" (L) x 1.90" (H)
Outline	TC-A-2

ECCN

EAR99

FEATURES

- Full Band Coverage
- Good Conversion Flatness

APPLICATIONS

- Test Lab
- Instrumentations
- Auto Test Set


SUPPLEMENTAL DETAILS




STV-00-28-S1

Conversion Loss vs. Frequency

RF: -20 dBm

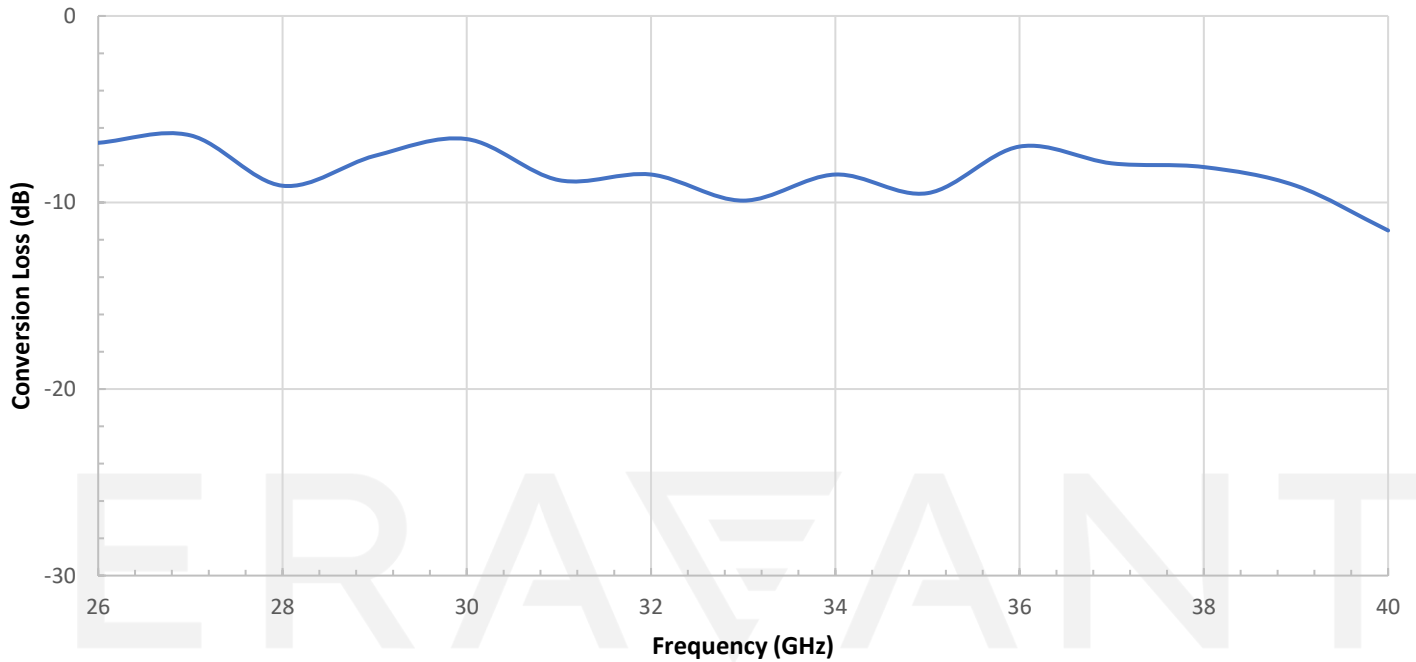

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

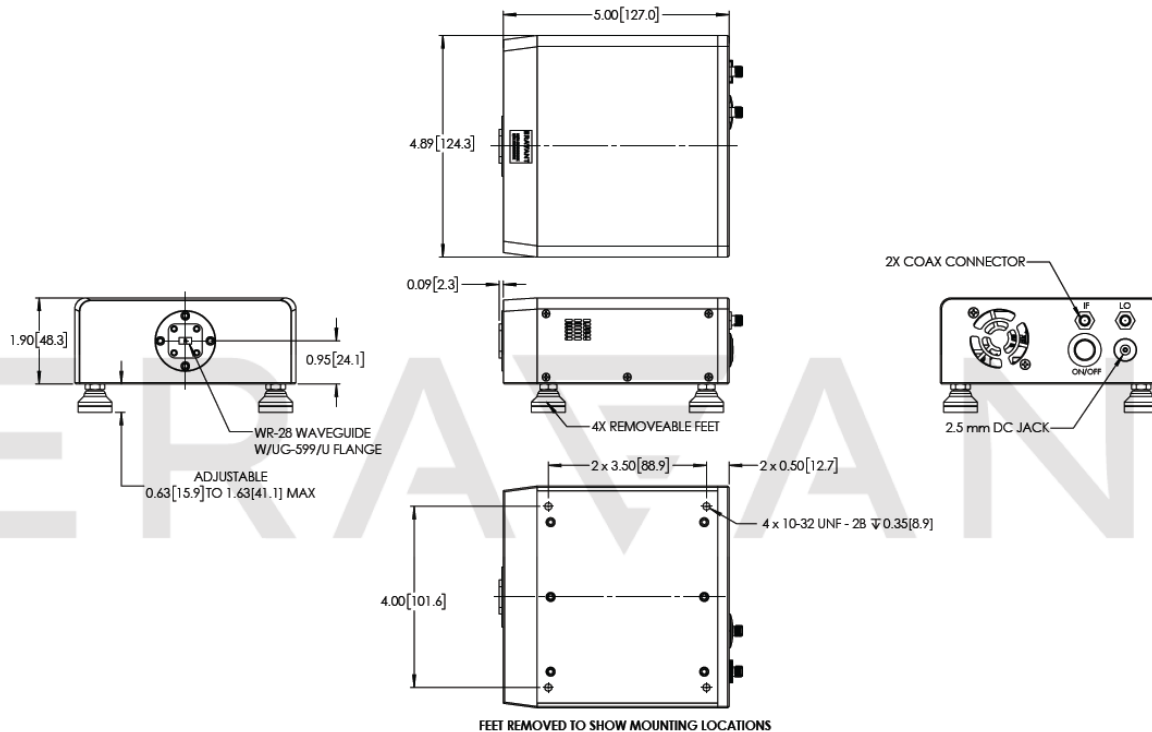

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE