

SWB-06090-EB-1.0

WR-06 E-Plane Waveguide Bend, 90° , 1.0" Bend Radius

SWB-06090-EB-1.0 is a 90 degree, WR-06 E-plane waveguide bend with UG-387/U-M anti-cocking flanges. The bend radius is 1.0". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 110 to 170 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Bend Plane	E-Plane
Bend Angle	90 Degrees
Bend Radius	1.0"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.6 Oz
Outline	WB-ED-A-L

ECCN

EAR99

FEATURES

- Frequency Coverage: 110 to 170 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentations
- Sub-assemblies
- Lab Use

SUPPLEMENTAL DETAILS



SWB-06090-EB-1.0

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

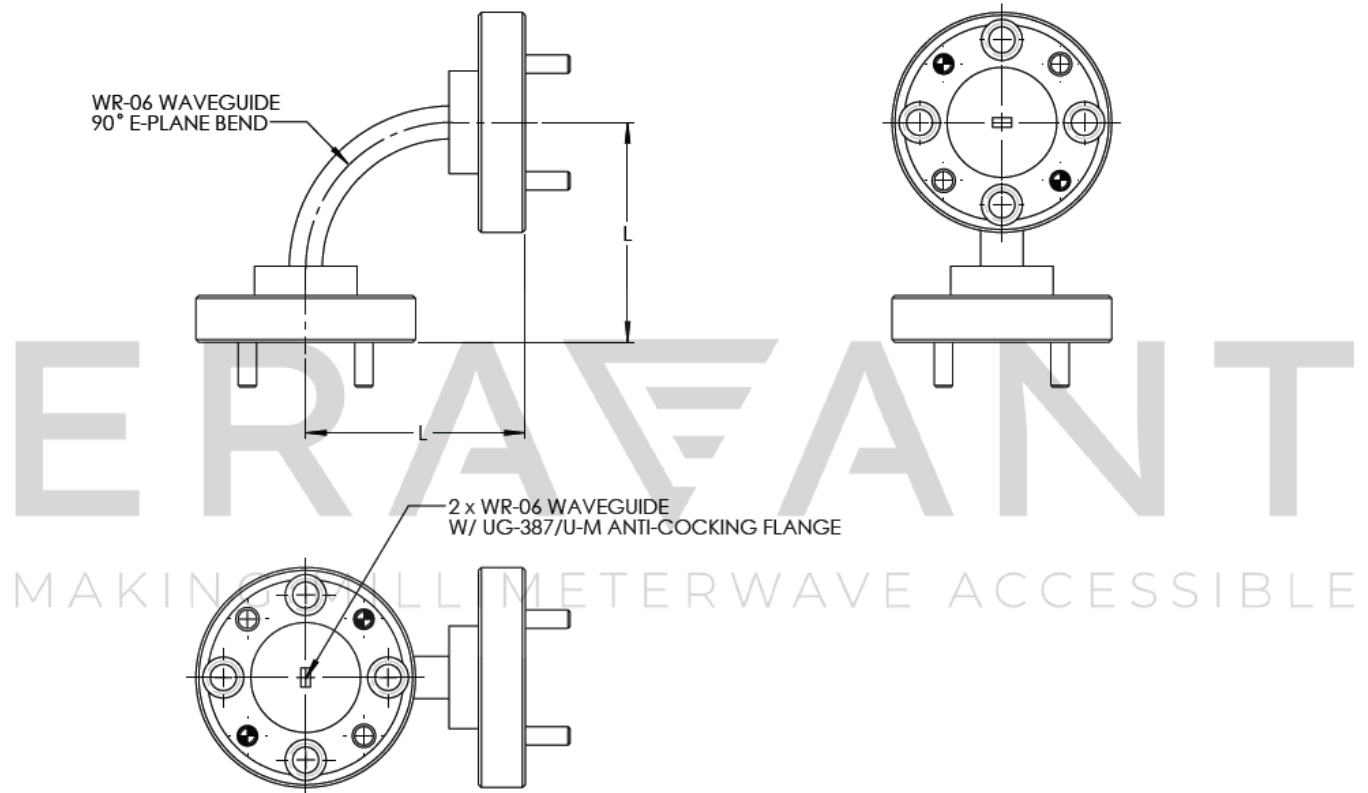

NOTE:

LENGTH "L" IS CUSTOMIZABLE

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model SCH-06004-S1 is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended