



Coaxial Bandpass Filter, 16.94 to 17.34 GHz

Description:

SCF-17304240-SFSF-B3-2 is a coaxial bandpass filter with a passband frequency of 16.94 to 17.34 GHz. The typical insertion loss of the bandpass filter is 1.5 dB and the passband ripple is ± 0.3 dB. The rejection frequencies are 16.54 GHz or less and 17.74 GHz or higher. The typical rejection is 40 dB and the typical passband return loss of the filter is 18 dB. The RF connectors of the the filter are SMA Female connectors. Other configurations are available under different model numbers.



Features:

- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Sub-assemblies
- System Integrations

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	16.94 GHz		17.34 GHz
Passband Insertion Loss		1.5 dB	
Passband Ripple		± 0.3 dB	
Rejection Frequency, Low Side	DC		16.54 GHz
Rejection, Low Side		40 dB	
Rejection Frequency, High Side	17.74 GHz		
Rejection, High Side		40 dB	
Passband Return Loss		18 dB	
Impedance		50 Ω	
Power Handling			5 W (CW)
Specification Temperature		+25 $^{\circ}$ C	
Operating Temperature	-40 $^{\circ}$ C		+85 $^{\circ}$ C


Mechanical Specifications:

Item	Specifications
RF Port 1	SMA Female
RF Port 2	SMA Female
Material	Aluminum
Finish	Black Paint
Outline	CF-B5-LJ2




Coaxial Bandpass Filter, 16.94 to 17.34 GHz

Typical Performance vs. Frequency

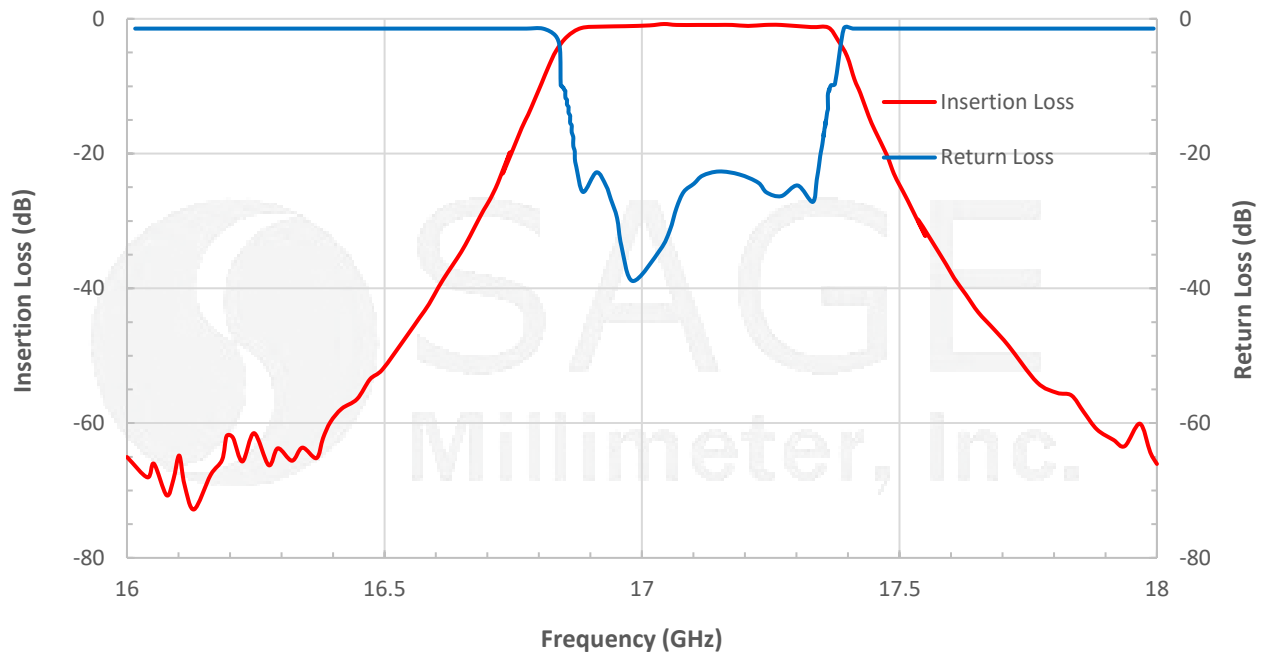

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

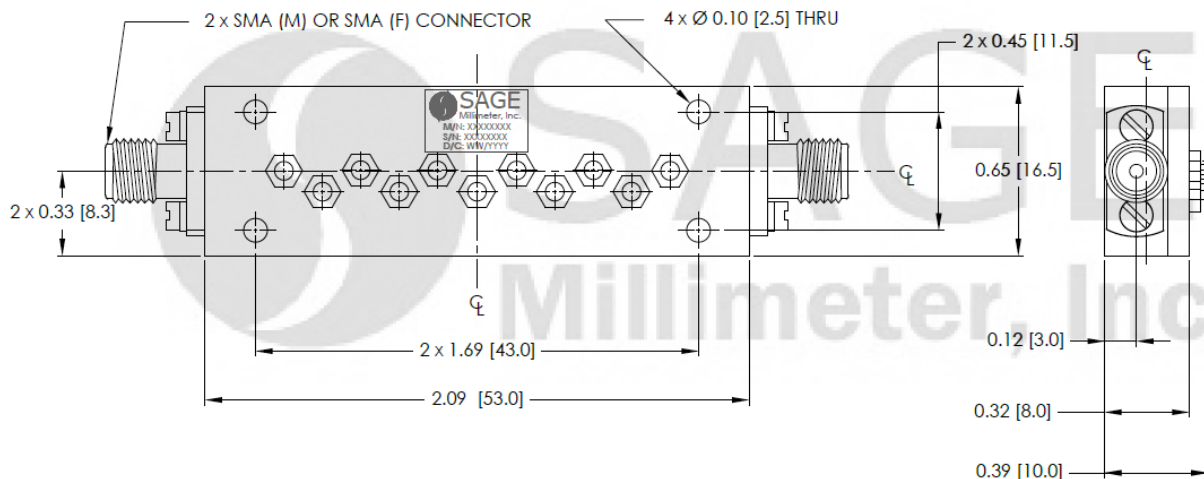

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**