



V-Band Waveguide to 1.85mm Connector Adapter, End Launch, Thermal Vacuum Safe

Description:

Models SWC-15VF-E1-V and SWC-15VM-E1-V are end launch (180°) V-Band waveguide to coax adapters that cover the frequency range of 50 to 70 GHz. They are designed and manufactured for instrumentation grade quality and thermal vacuum compatibility, allowing for an efficient transition between the rectangular waveguide and 1.85 mm (V) coax connector.



Features:

- Thermal Vacuum Safe
- Broadband Coverage
- Lower Insertion Loss
- Instrumentation Grade
- DC Short Circuit

Applications:

- Thermal Vacuum Chamber
- Test Lab
- Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	50 GHz		70 GHz*
Insertion Loss		0.7 dB	1 dB
Return Loss	13 dB	16 dB	
Power Handling			40 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*The adapter can cover up to 75 GHz with slight performance degradation due to the frequency limitations of the 1.85 mm (V) coaxial connector.


Mechanical Specifications:

Item	Parameter
Waveguide	WR-15 with UG-385/U Flange
Coaxial	1.85 mm (V) Female for Model Number: SWC-15VF-E1
Coaxial	1.85 mm (V) Male for Model Number: SWC-15VM-E1
Insertion Length	0.66" for SWC-15VF-E1
Insertion Length	0.81" for SWC-15VM-E1
Housing Material	Aluminum
Finish	Gold Plated
Weight	0.2 Oz
Outline	WC-VE




V-Band Waveguide to 1.85mm Connector Adapter, End Launch, Thermal Vacuum Safe

Typical Return Loss and Back to Back Insertion Loss vs. Frequency

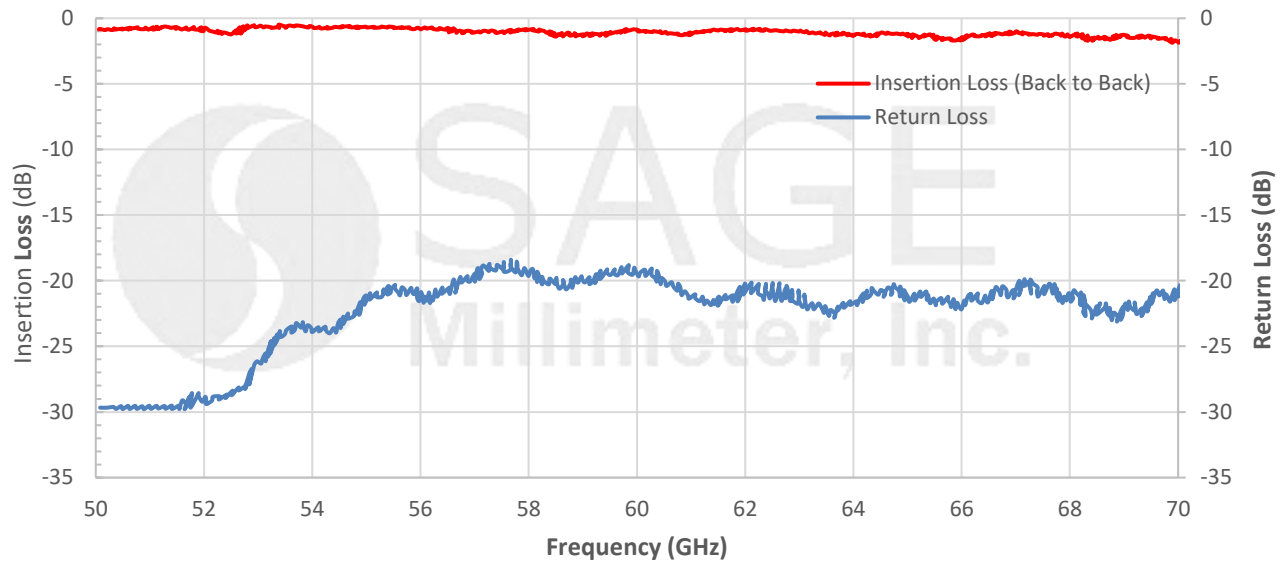

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

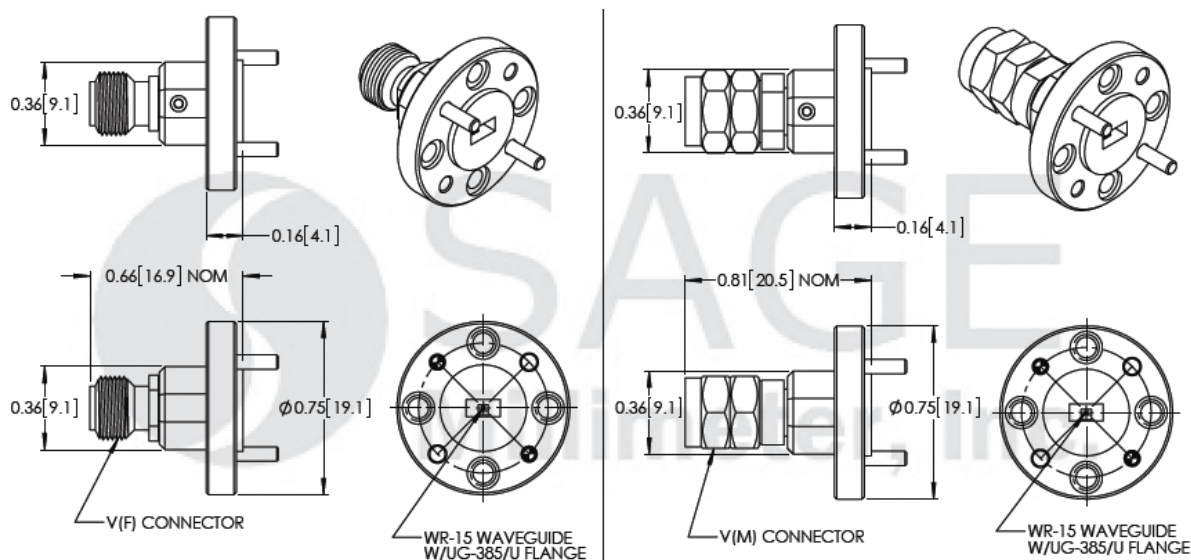

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com