

## V-Band Waveguide to 1.85 mm Connector Adapter, Right Angle

### Description:

**SWC-15VF-R1-WP** is a right angle (90°) V-Band waveguide to coax adapters that cover the frequency range of 50 to 70 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 1.85 mm coax connector. The end launch (180°) versions are offered under model numbers **SWC-15VF-E1** and **SWC-15VM-E1**.



### Features:

- Broadband Coverage
- Low Insertion Loss and VSWR
- Instrumentation Grade
- DC Open Circuit

### Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	50 GHz		70 GHz*
Insertion Loss		1 dB	
Return Loss		13 dB	
Power Handling			40 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

\* Operating Frequency is limited by the 1.85 mm connector.


### Mechanical Specifications:

Item	Parameter
Waveguide Port	WR-15 with UG-385/U Flange
Coaxial Port	1.85 mm Female
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WC-VR




## V-Band Waveguide to 1.85 mm Connector Adapter, Right Angle

### Typical Measured Performance vs. Frequency

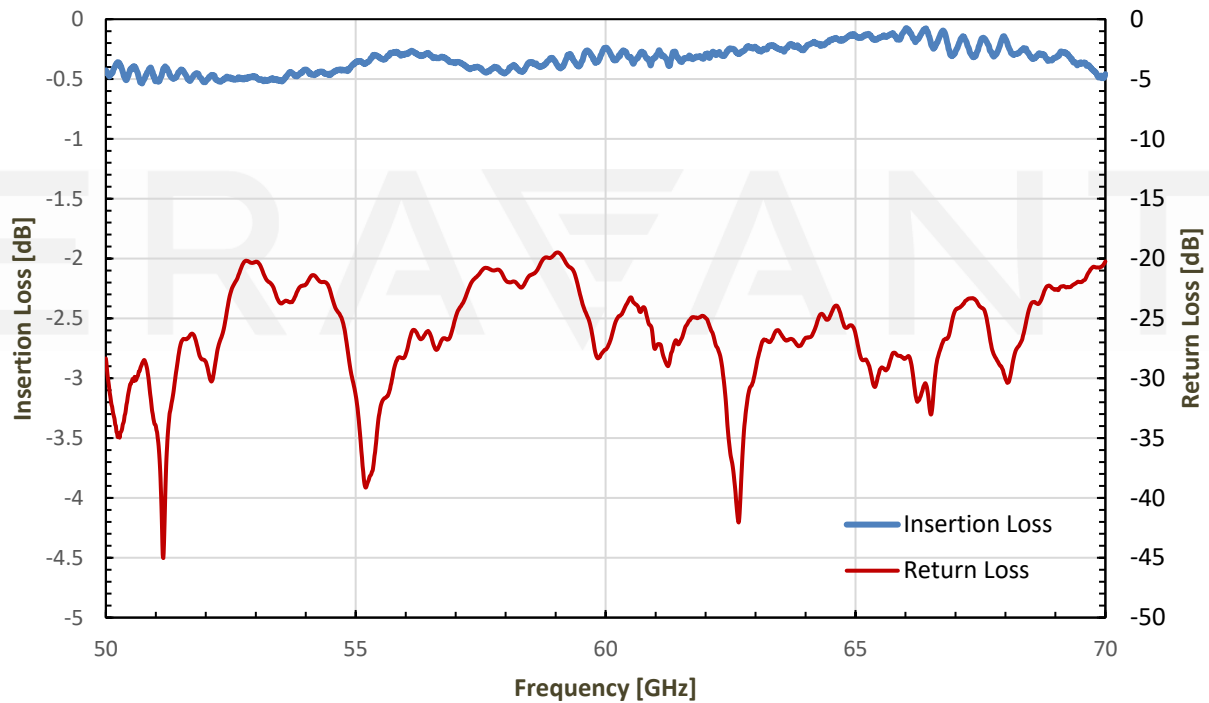

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

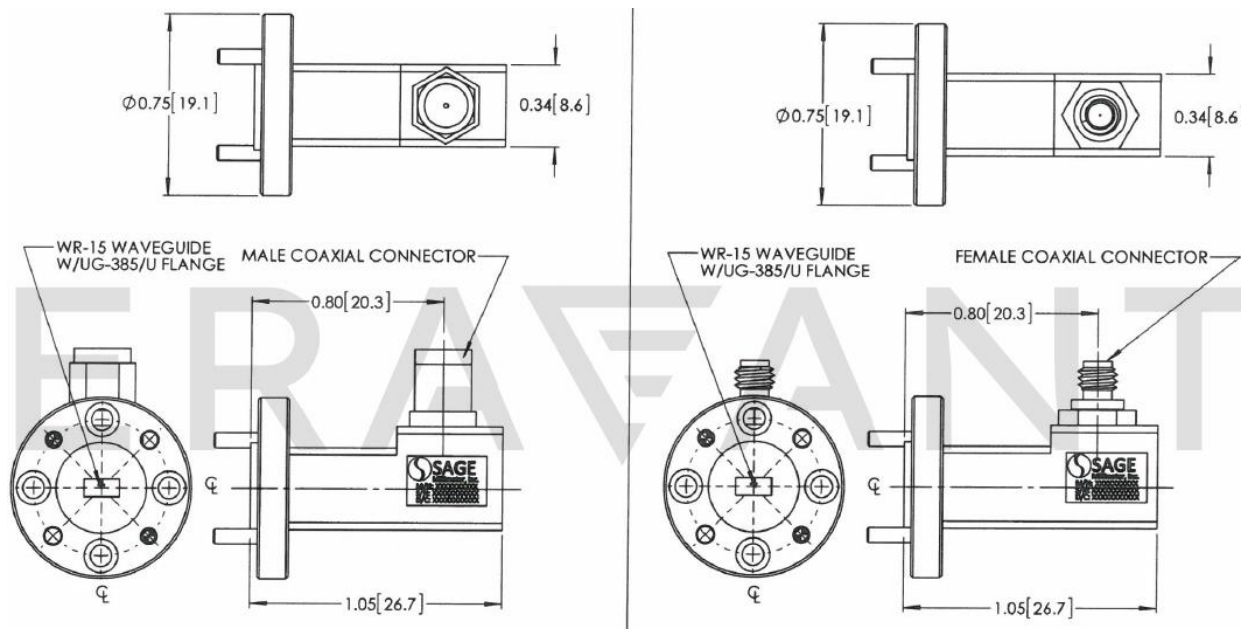

## V-Band Waveguide to 1.85 mm Connector Adapter, Right Angle

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

### Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be used. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

ERAVANT

