



## V-Band Waveguide to Coax Panel Mount Adapter, Right Angle

### Description:

Models SWC-15VF-R1-WR and SWC-15VM-R1-WR are right angle (90°) V-Band waveguide to coax panel mount adapters that cover the frequency range of 50 to 70 GHz. They are designed and manufactured for panel mount instrumentation applications and allow for an efficient transition between the rectangular waveguide and 1.85 mm (V) coax connector. These adapters are also specially designed to be weather resistant.



### Features:

- Broad Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Open Circuit
- Weather Resistant

### Applications:

- Test Labs
- Instrumentations
- Communication Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency*	50 GHz		70 GHz
Insertion Loss		0.7 dB	1 dB
Return Loss	13 dB	16 dB	
Power Handling			30 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

\*The adapter can cover up to 75 GHz with slight performance degradation due to the frequency limitations of the 1.85 mm (V) coaxial connector.

### Mechanical Specifications:


Item	Specification
Waveguide	WR-15 with UG-385/U Flange with O-Ring
Coaxial	1.85 mm (V) Female for Model Number: SWC-15VF-R1-WR
Coaxial	1.85 mm (V) Male for Model Number: SWC-15VM-R1-WR
Body Material	Aluminum
Flange Material	Brass
Finish	Gold Plated
Weight	2 Oz
Size	1.55" (L) x 1.33" (Ø)
Outline	WC-VR-WR






## V-Band Waveguide to Coax Panel Mount Adapter, Right Angle

### Typical Return Loss and Back to Back Insertion Loss vs. Frequency

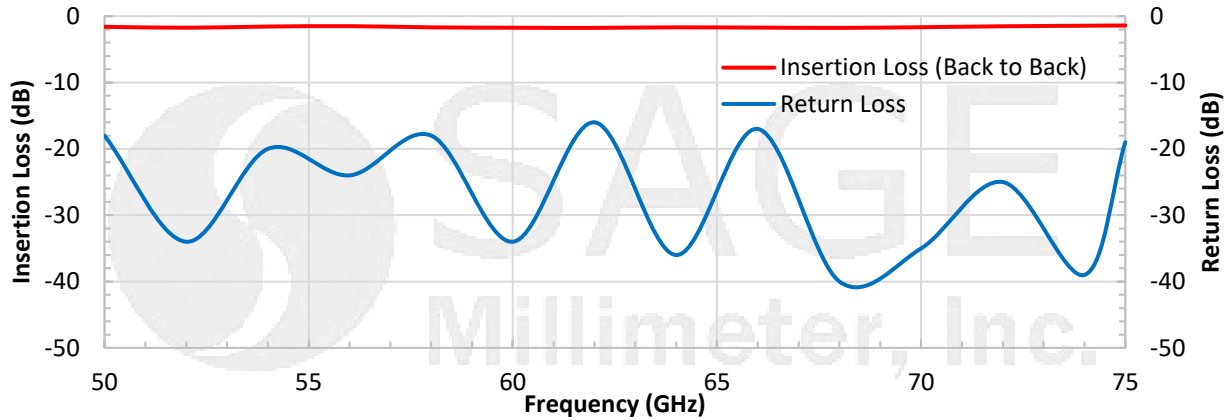

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

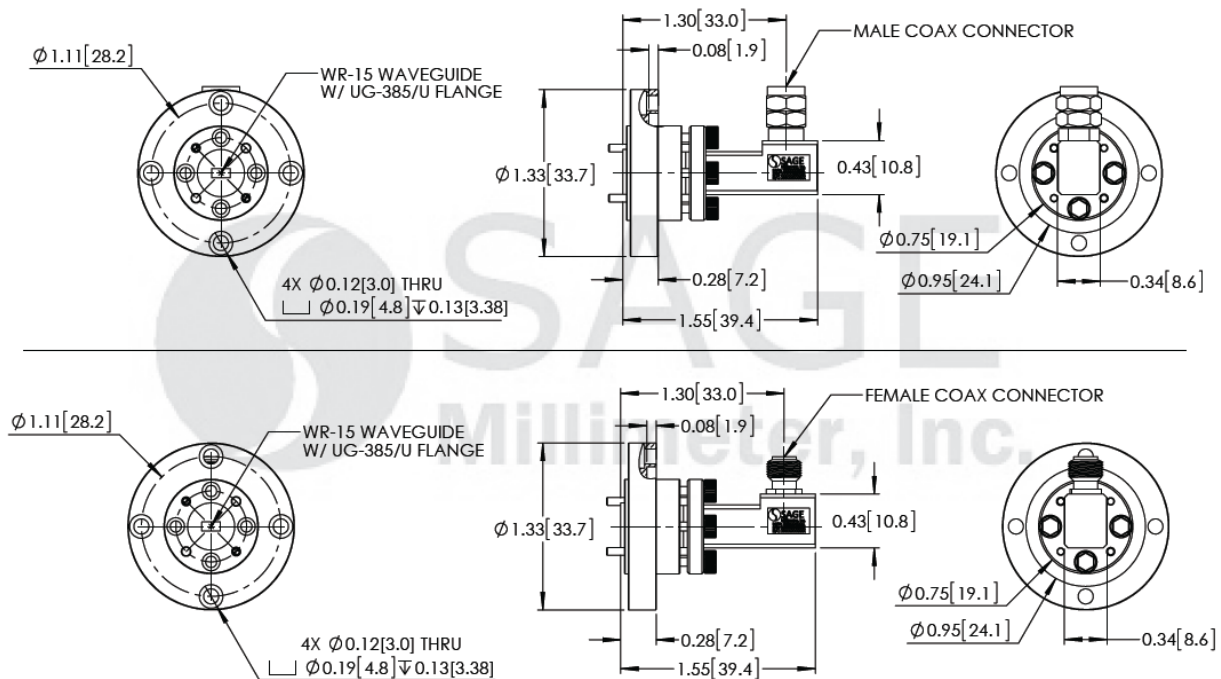

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com