

V-Band Waveguide to 1.85mm Connector Adapter, End Launch, Non Anti-Cocking

Description:

Models SWC-15VF-E1-NAC and SWC-15VM-E1-NAC are end launch (180°) V-Band waveguide to coax adapters that cover the frequency range of 50 to 70 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 1.85 mm (V) coax connector. The right angle (90°) versions are offered under model numbers SWC-15VF-R1 and SWC-15VM-R1.



Features:

- Broad Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|---------|---------|-----------|
| Frequency Range | 50 GHz | | 70 GHz* |
| Insertion Loss* | | 0.7 dB | 1 dB |
| Return Loss | 13 dB | 16 dB | |
| Power Handling | | | 40 W (CW) |
| Specification Temperature | | +25°C | |
| Operating Temperature | -40°C | | +85°C |

*The adapter can cover up to 75 GHz with slight performance degradation due to the frequency limitations of the 1.85 mm (V) coaxial connector.

*Insertion Loss is tested back-to-back with a male and female adapter, the result is divided by 2.


Mechanical Specifications:

| Item | Parameter |
|------------------|--|
| Waveguide | WR-15 with UG385/U Flange |
| Coaxial | 1.85 mm (V) Female for Model Number: SWC-15VF-E1 |
| Coaxial | 1.85 mm (V) Male for Model Number: SWC-15VM-E1 |
| Insertion Length | 0.66" for SWC-15VF-E1 |
| Insertion Length | 0.81" for SWC-15VM-E1 |
| Housing Material | Aluminum |
| Finish | Gold Plated |
| Weight | 0.2 Oz |
| Outline | WC-VE |




V-Band Waveguide to 1.85mm Connector Adapter, End Launch, Non Anti-Cocking

Typical Return Loss and Back to Back Insertion Loss vs. Frequency

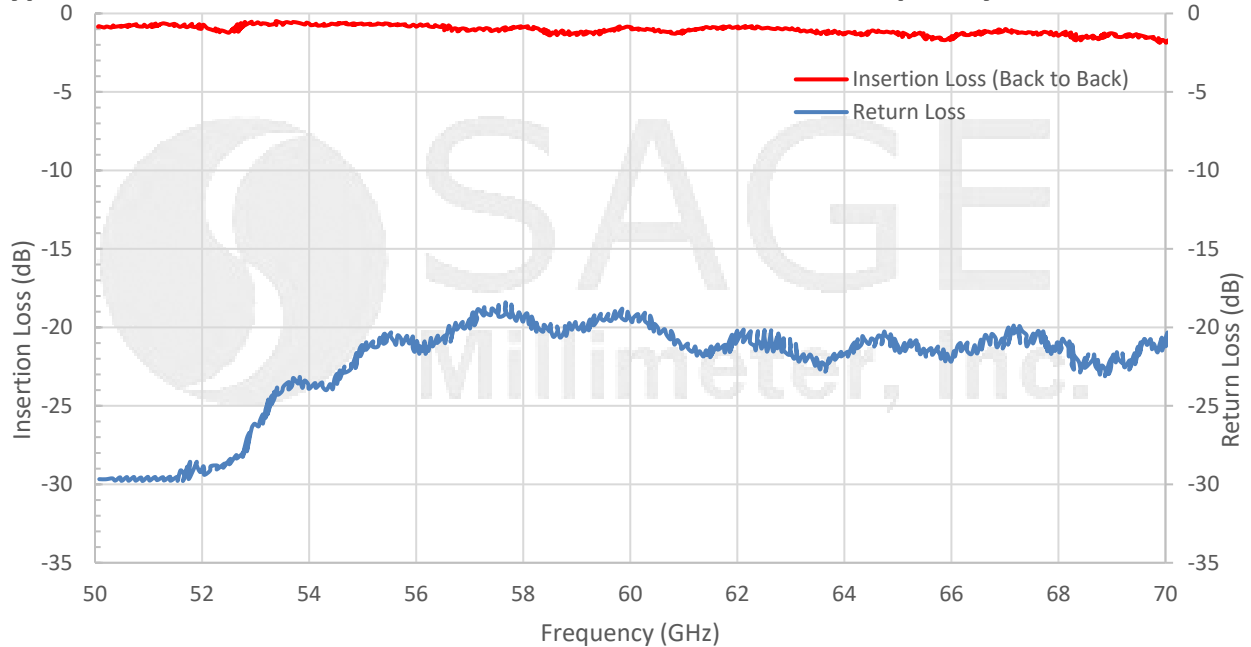

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

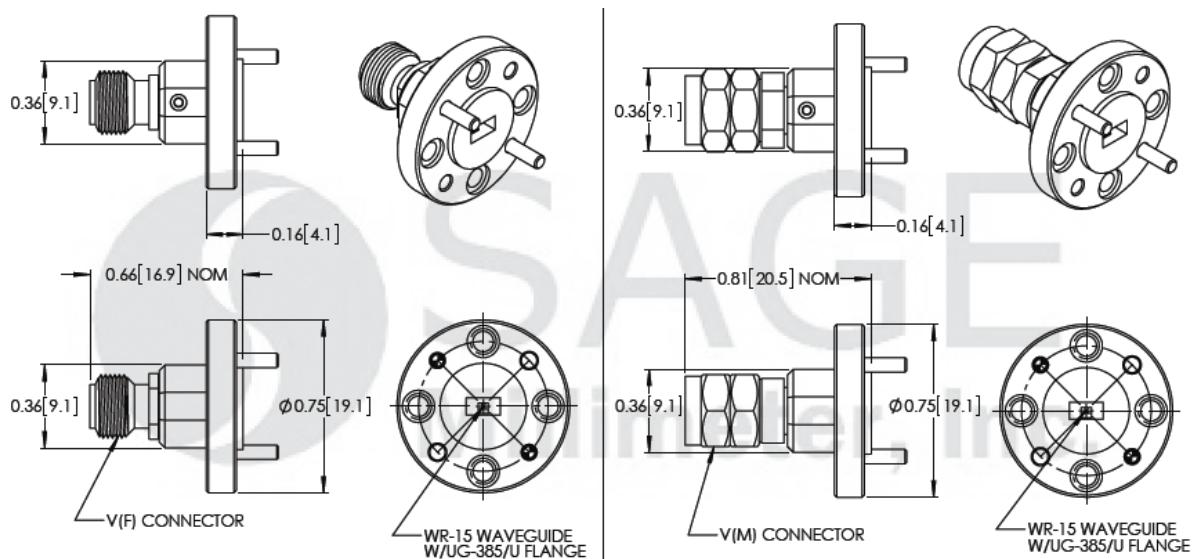

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.



V-Band Waveguide to 1.85mm Connector Adapter, End Launch, Non Anti-Cocking

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

