

SCM-1M30-UB

1.0 mm (M) Coaxial Matching Load, 1 Watt

SCM-1M30-UB is a 1.0 mm male coaxial matching load that covers the frequency range of DC to 110 GHz. The coaxial matching load exhibits a typical return loss of 13 dB. It is designed and manufactured to offer a good match for system applications. The characteristic impedance of the matching load is 50 Ohms and the power handling is 1 Watt. The female version is available under the model number SCM-1F30-UB.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	DC		110 GHz
Return Loss		13 dB	
Impedance		50 Ω	
Power Handling (Average)*			1 W (CW)
Power Handling (Peak)*			5 W
Specification Temperature		+25 °C	
Operating Temperature	-55 °C		+125 °C

*1 W average to 25 °C ambient temperature, derated linearly to 0.1 W @ 125 °C

*5 W @ 5 μ s pulse width with maximum 1% duty cycle

Mechanical Specifications:

Item	Specification
Connector Type	1.0 mm Male
Material	Stainless Steel
Finish	Passivated
Weight	0.1 Oz
Length	0.54"
Outline	CM-1M-30-2

ECCN

EAR99

FEATURES

- High Return Loss
- 50 Ohms

APPLICATIONS


- Test Lab
- Sub-assemblies
- System Integration

SUPPLEMENTAL DETAILS




SCM-1M30-UB

Typical Return Loss vs. Frequency

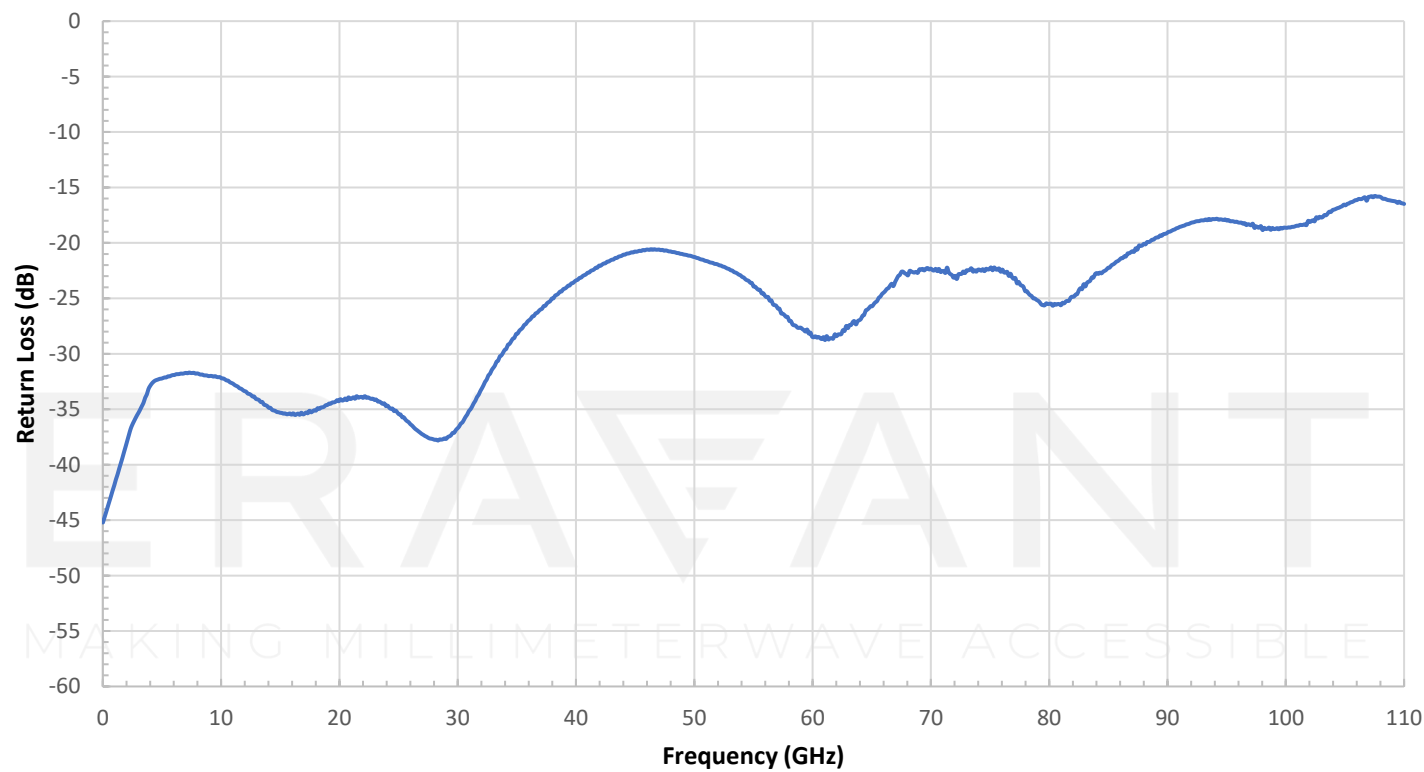

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

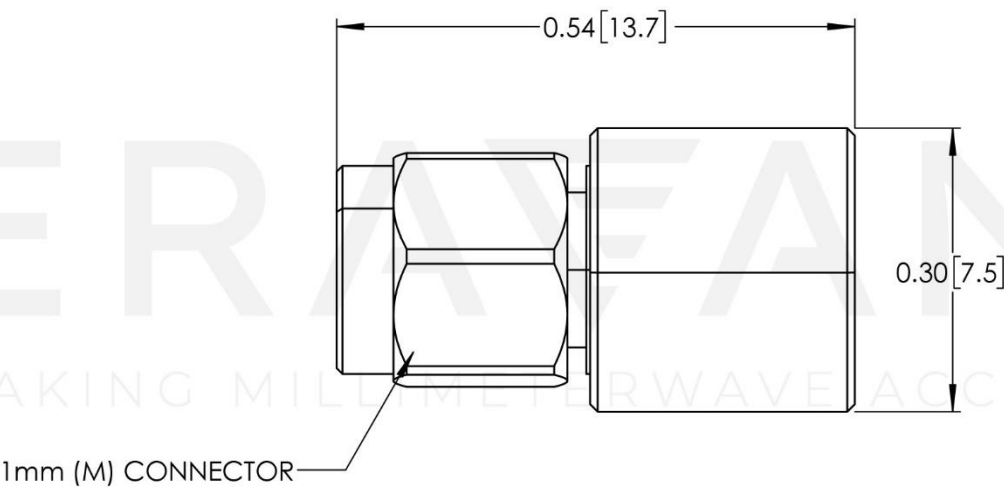

SCM-1M30-UB

NOTE:

- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model SCH-06004-S1 is highly recommended.

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE