

SWC-19VM-R1-WP

U-Band Waveguide to 1.85mm Connector Adapter,
Right Angle

SWC-19VM-R1-WP is a right angle (90°) U-Band waveguide to coax adapter that covers the frequency range of 40 to 60 GHz. It is designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 1.85 mm (V) coax connector. The end launch (180°) versions are offered under model numbers **SWC-19VF-E1** and **SWC-19VM-E1**.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	40 GHz		60 GHz
Insertion Loss		0.5 dB	0.8 dB
Return Loss	16 dB	18 dB	
Power Handling			40 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Waveguide Port	WR-19 with UG-383/U-M Flange
Coaxial Port	1.85 mm (V) Male for Model Number: SWC-19VM-R1-WP
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WC-UR

ECCN

EAR99

FEATURES

- Broad Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Open Circuit

APPLICATIONS


- Test Lab
- Instrumentations
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWC-19VM-R1-WP

Typical Measured Performance vs. Frequency

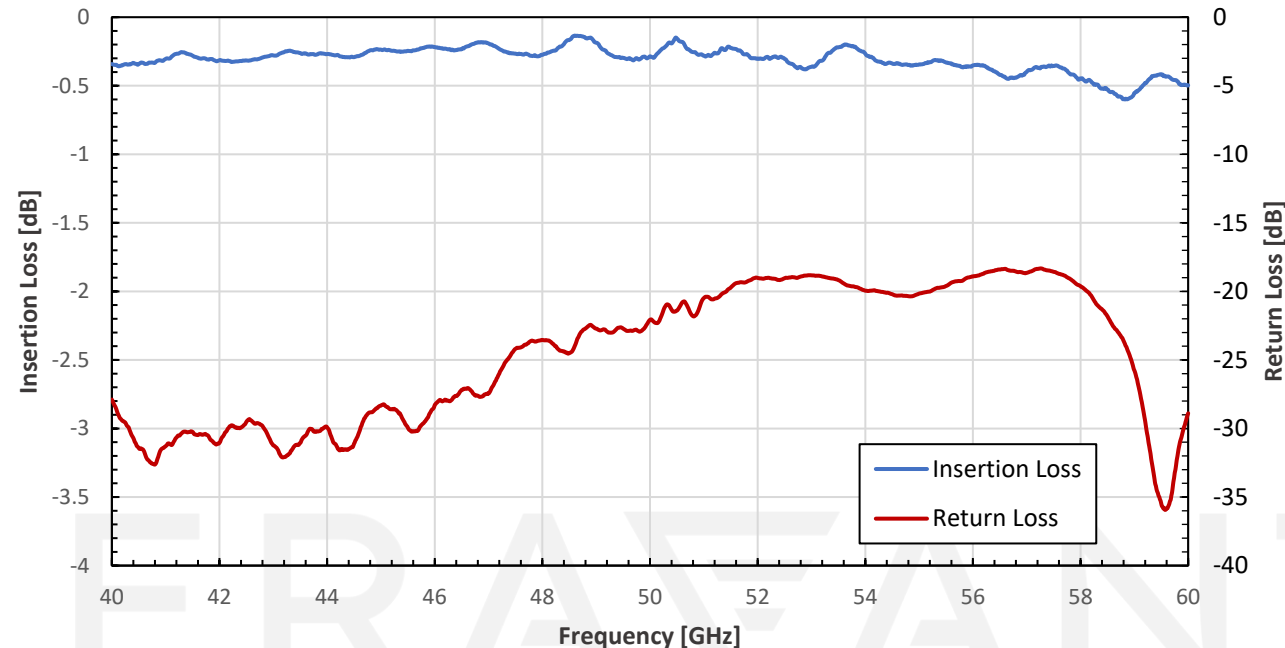

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

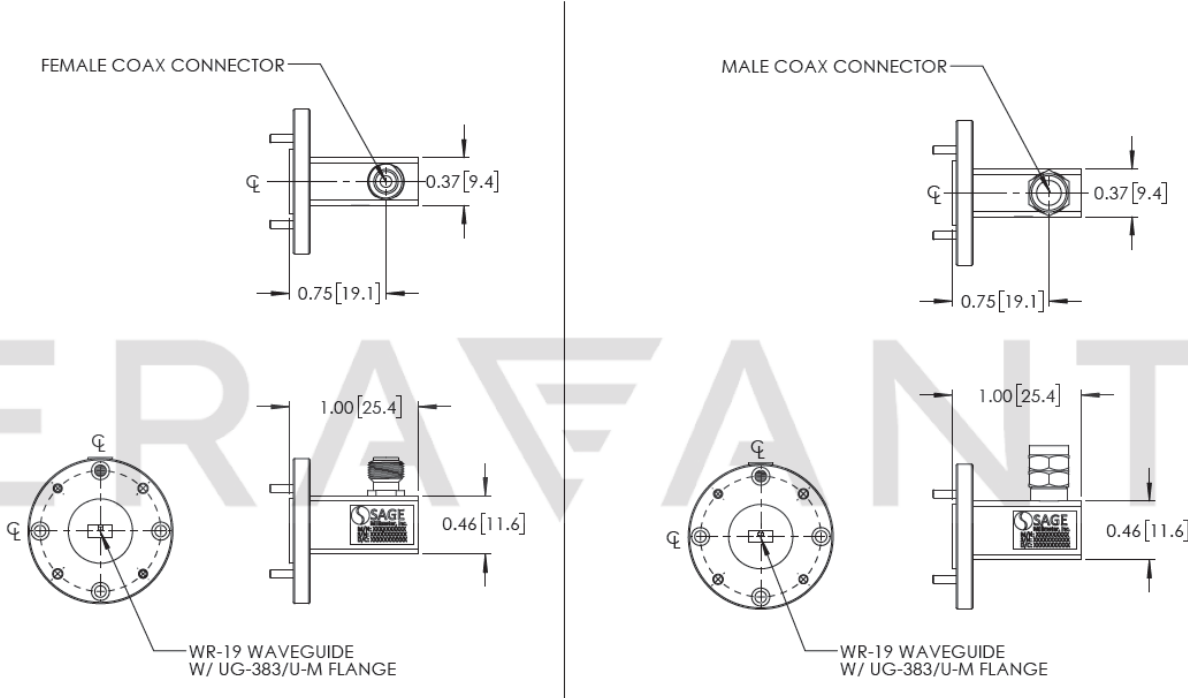

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model SCH-06004-S1 is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE