



Q-Band Waveguide to 2.4 mm Connector Adapter, End Launch, 15 dB RL

Description:

Models SWC-222F-E1-RL15 and SWC-222M-E1-RL15 are end launch (180°) Q-Band waveguide to coax adapters that cover the frequency range of 33 to 50 GHz. The adapters are designed and manufactured for commercial grade, allowing for an efficient transition between the rectangular waveguide and 2.4 mm coax connector. These adapters offer a typical return loss of 15 dB. The right angle (90°) versions are offered under model numbers **SWC-222F-R1-RL15** and **SWC-222M-R1-RL15**. Other coaxial connector types are also offered under various model numbers.



Features:

- Broad Band Coverage
- Commercial Grade
- Low Cost
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	33 GHz		50 GHz
Insertion Loss*		0.6 dB	1.0 dB
Return Loss	12 dB	15 dB	
Power Handling			40 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

*Insertion loss is tested back-to-back with a male and female adapter, the result is divided by 2.

Mechanical Specifications:


Item	Parameter
Waveguide Port	WR-22 waveguide with UG-383/U Flange
Coaxial Port	2.4 mm Female for Model Number: SWC-222F-E1-RL22
	2.4 mm Male for Model Number: SWC-222M-E1-RL22
Size	0.64" (L) x 1.13" (Ø)
Housing Material	Aluminum
Finish	Gold Plated
Weight	0.4 oz.
Outline	WC-QE






Q-Band Waveguide to 2.4 mm Connector Adapter, End Launch, 15 dB RL

Typical Insertion Loss and Return Loss vs. Frequency

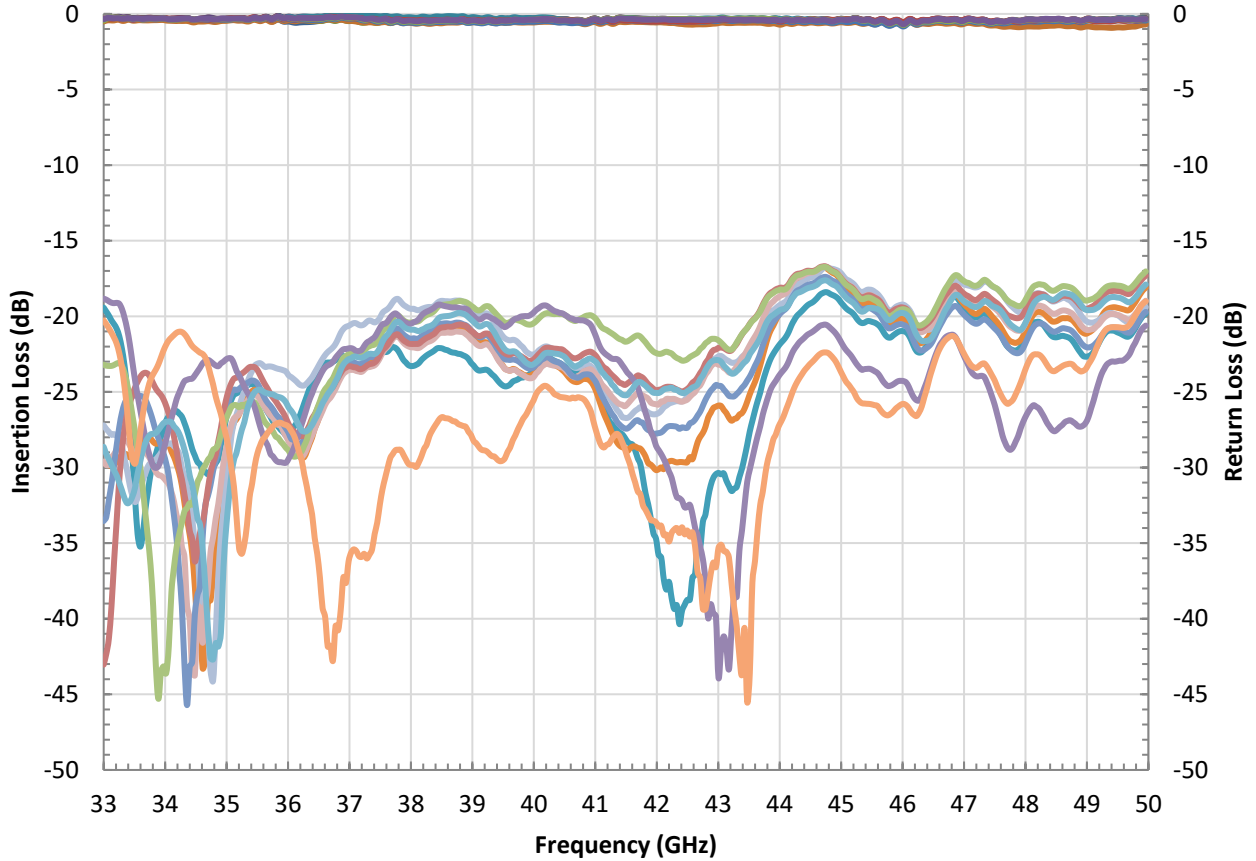

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

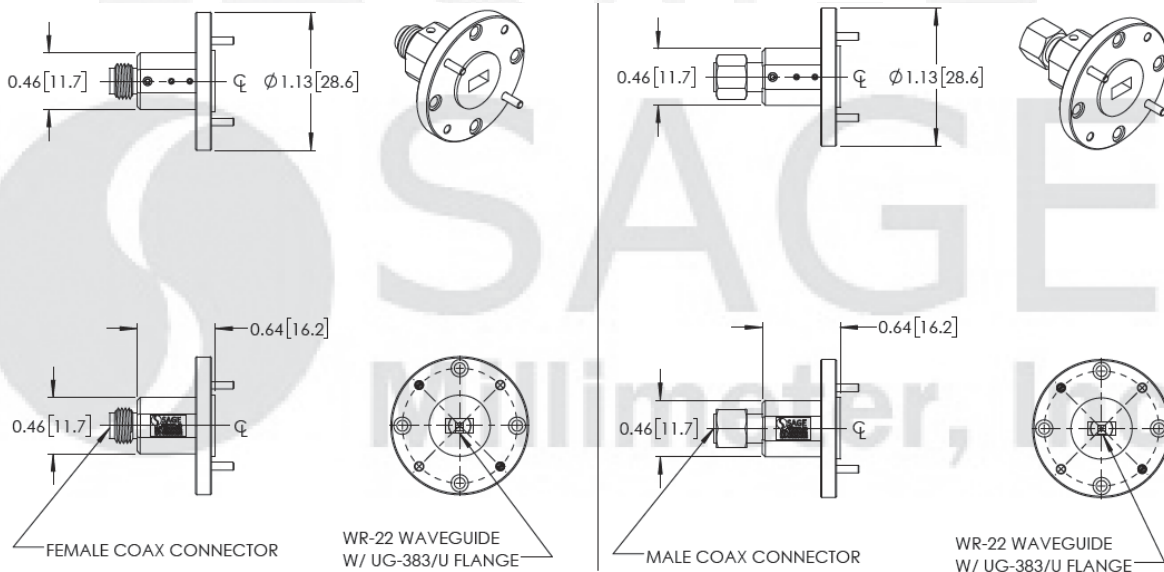



Q-Band Waveguide to 2.4 mm Connector Adapter, End Launch, 15 dB RL

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

