



Q-Band Waveguide to 1.85 mm Connector Adapter, End Launch, Thermal Vacuum Safe

Description:

Models SWC-22VF-E1-V and SWC-22VM-E1-V are end launch (180°) Q-Band waveguide to coax adapters that cover the frequency range of 33 to 50 GHz. The adapters are designed and manufactured for instrumentation grade quality and thermal compatibility, allowing for an efficient transition between the rectangular waveguide and 1.85 mm (V) coax connector. The right angle (90°) versions are offered under model numbers SWC-22VF-R1-V and SWC-22VM-R1-V.



Features:

- Broad Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	33 GHz		50 GHz
Insertion Loss*		0.4 dB	0.7 dB
Return Loss	14 dB	18 dB	
Power Handling			40 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

*Insertion loss is tested back to back with a male and female adapter, the result is divided by 2.

Mechanical Specifications:


Item	Parameter
Waveguide	WR-22 with UG-383/U Flange
Coaxial	1.85 mm (V) Female for Model Number: SWC-22VF-E1-V
Coaxial	1.85 mm (V) Male for Model Number: SWC-22VM-E1-V
Size	0.87" (L) x 1.13" (Ø) for Model Number: SWC-22VF-E1-V
Size	1.04" (L) x 1.13" (Ø) for Model Number: SWC-22VM-E1-V
Housing Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WC-QE






Q-Band Waveguide to 1.85 mm Connector Adapter, End Launch, Thermal Vacuum Safe

Typical Return Loss & Back to Back Insertion Loss vs. Frequency

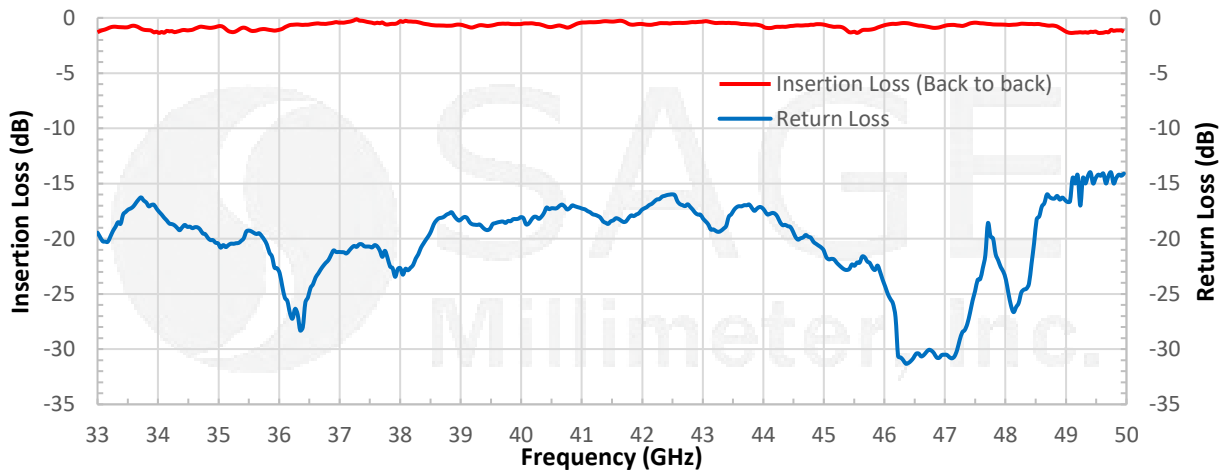

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

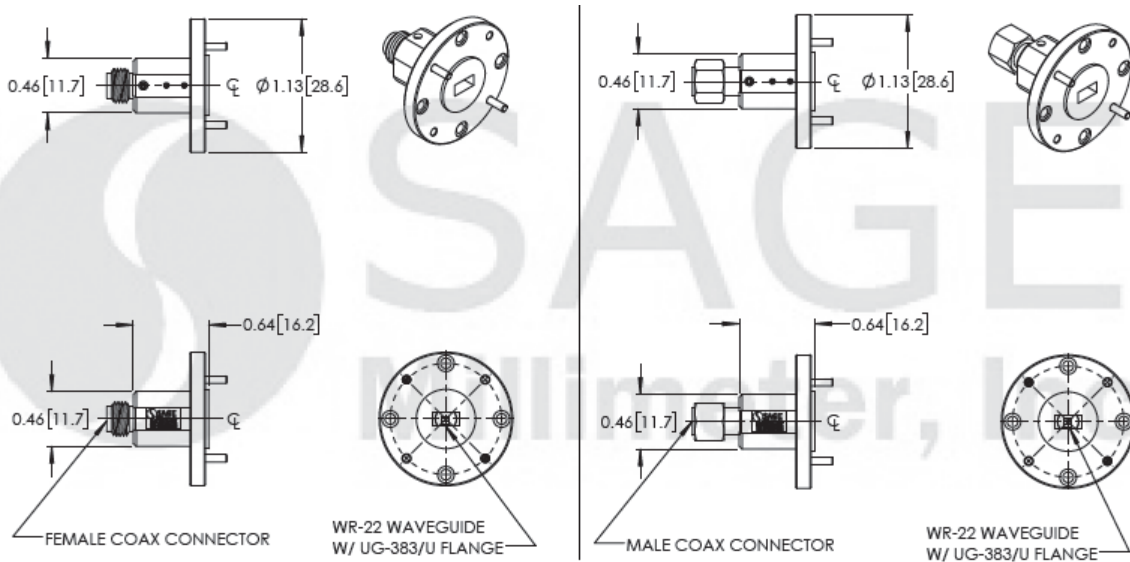

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

