



## K-Band Waveguide to 2.4 mm Connector Adapter, End Launch

### Description:

**Models SWC-422F-E1 and SWC-422M-E1** are end launch (180°) K-Band waveguide to coax adapters that cover the frequency range of 18 to 26.5 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 2.4 mm coax connector. The right angle (90°) versions are offered under model numbers SWC-422F-R1 and SWC-422M-R1.



### Features:

- Broad Band Coverage
- Lower Insertion Loss
- Instrumentation Grade
- DC Short Circuit

### Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	18 GHz		26.5 GHz
Insertion Loss*		0.3 dB	0.4 dB
Return Loss	17 dB	20 dB	
Power Handling			50 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

\*Insertion loss is tested back-to-back with a male and female adapter, and the result is divided by 2.

### Mechanical Specifications:

Item	Specification
Waveguide Port	WR-42 Waveguide with UG-595/U Flange
Coaxial Port	2.4 mm Female for Model Number: SWC-422F-E1
Coaxial Port	2.4 mm Male for Model Number: SWC-422M-E1
Size	0.59" (L) x 0.88" (W) x 0.88" (H)
Housing Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WC-KE




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com




## K-Band Waveguide to 2.4 mm Connector Adapter, End Launch

Typical Return Loss and Back to Back Insertion Loss vs. Frequency

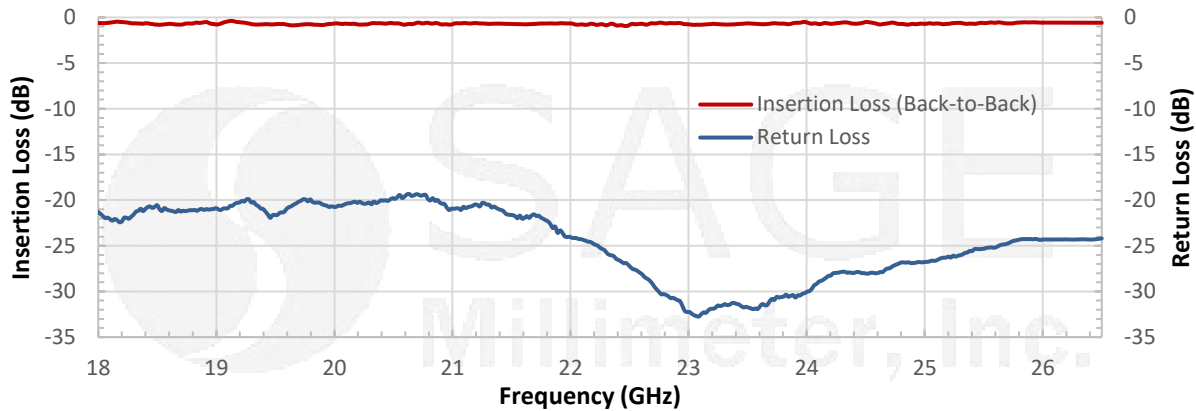

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

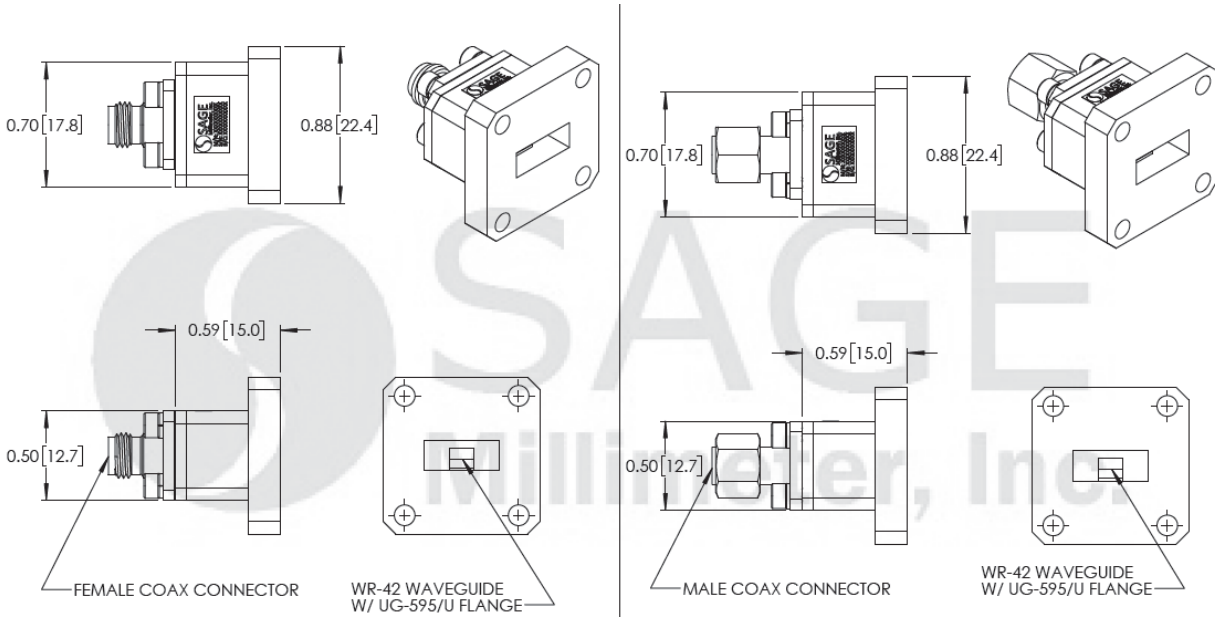

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com