



Ku-Band Waveguide to SMA Connector Adapter, Right Angle

Description:

Models **SWC-62SF-R7-2** and **SWC-62SM-R7-2** are right angle (90°) Ku-Band waveguide to SMA coax adapters that cover the frequency range of 12 to 18 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and SMA coax connector.



Features:

- Full Waveguide Band Coverage
- Low Insertion Loss
- Instrumentation Grade
- DC Open Circuit

Applications:

- Test Lab
- Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	12 GHz		18 GHz
Insertion Loss		0.2 dB	
Return Loss		20 dB	
Power Handling			150 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Waveguide Port	WR-62 Waveguide with UG-419/U Flange
Coaxial Port	SMA (F) for Model Number: SWC-62SF-R7-2
	SMA (M) for Model Number: SWC-62SM-R7-2
Material	Aluminum
Inner Finish	Silver Plated
Outer Finish	Black Paint
Weight	2.6 oz.
Outline	WC-6R-SX2






Ku-Band Waveguide to SMA Connector Adapter, Right Angle

Typical Insertion Loss and Return Loss vs Frequency

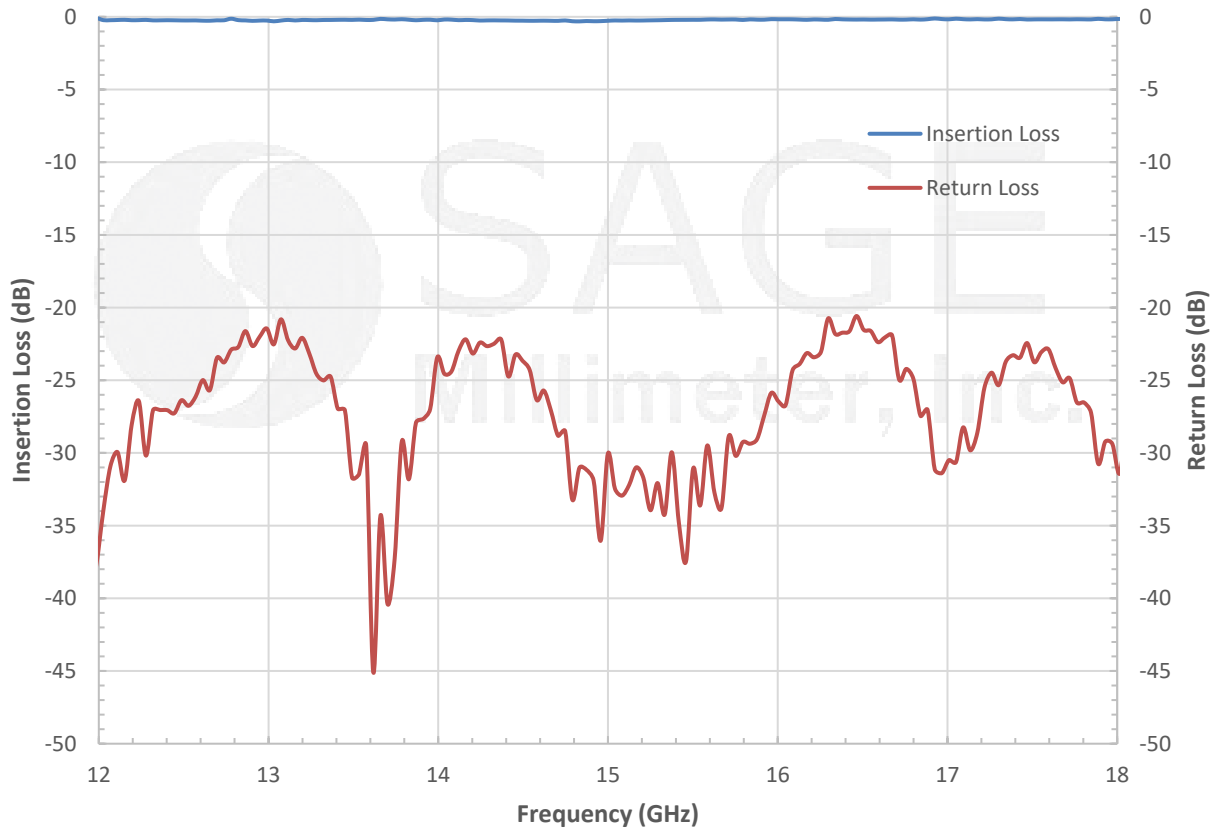

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

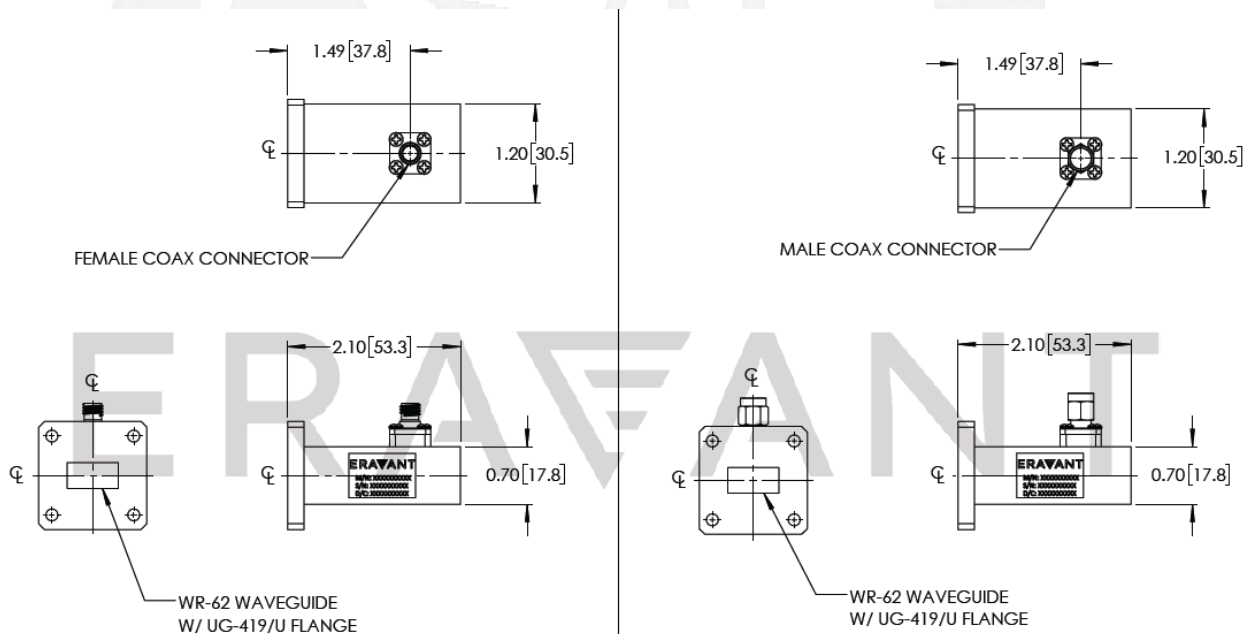

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



Ku-Band Waveguide to SMA Connector Adapter, Right Angle

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

