

WR-75 Waveguide to SMA Connector Adapter, Right Angle

Description:

Model SWC-75SF-R5-WP is a right angle (90°) WR-75 waveguide to SMA coax adapter that covers the frequency range of 10 to 15 GHz. The adapter is designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and SMA coax connector. The end launch (180°) version is offered under model numbers **SWC-75SF-E5**.



Features:

- Full Waveguide Band Coverage
- Low Insertion Loss
- Instrumentation Grade
- DC Open Circuit

Applications:

- Test Lab
- Instrumentation
- Sub-assemblies

Electrical Specifications:


Parameter	Minimum	Typical	Maximum
Frequency Range	10 GHz		15 GHz
Insertion Loss		0.2 dB	
Return Loss		20 dB	
Power Handling			150 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Waveguide Port	WR-75 Waveguide with Standard Flange
Coaxial Port	SMA (F)
Material	Aluminum
Inner Finish	Silver Plated
Outer Finish	Black Paint
Outline	WC-7R-H2

WR-75 Waveguide to SMA Connector Adapter, Right Angle

Typical Insertion Loss and Return Loss vs Frequency

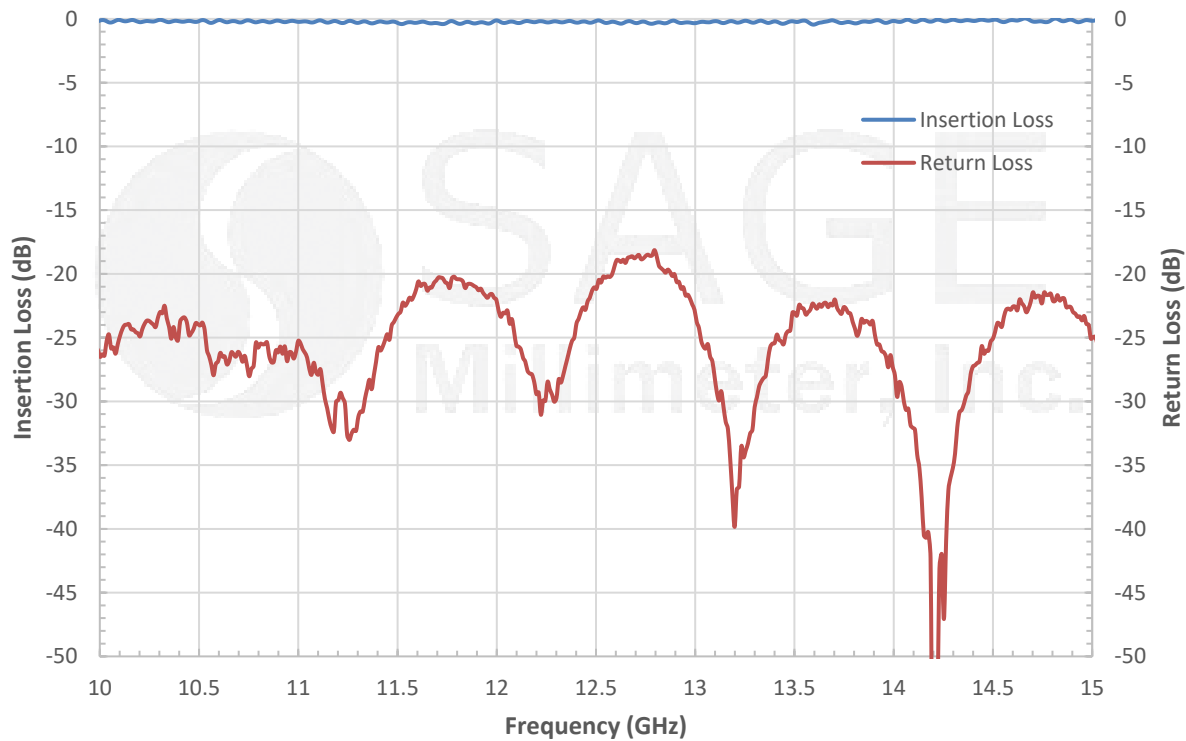

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

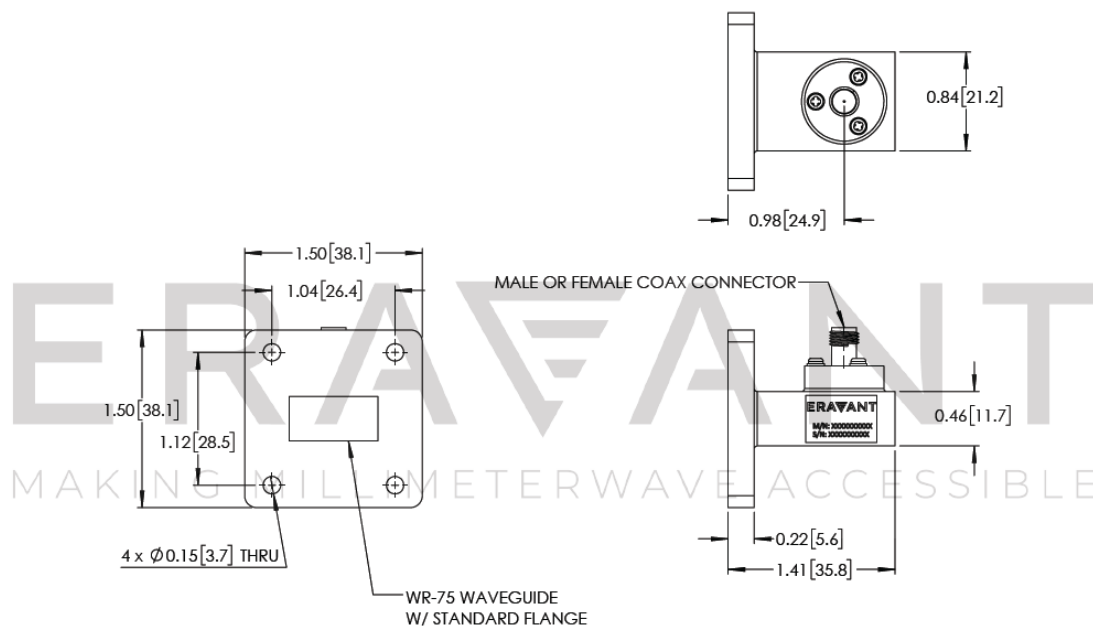



WR-75 Waveguide to SMA Connector Adapter, Right Angle

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**



SAGE
Millimeter, Inc.

