

SWF-27323340-28-H1

Waveguide Highpass Filter, Ka Band, 26.5 to 40 GHz

SWF-27323340-28-H1 is a Ka band waveguide highpass filter with a passband frequency of 26.5 GHz and higher and a rejection frequency from DC to 22.5 GHz. The filter provides a nominal insertion loss of 0.5 across its passband and a typical rejection of 40 dB. Since the low end cutoff frequency can be changed by modifying the design, custom designs can be offered under different model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency Range	26.5 GHz		40 GHz
Passband Insertion Loss		0.5 dB	
Rejection Frequency	DC		22.5 GHz
Rejection		40 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Waveguide	WR-28 Waveguide with UG-599/U Flange
Material	Brass
Finish	Gold Plated
Weight	3 Oz
Outline	WF-HA

ECCN

EAR99

FEATURES

- Low Cost
- Low Insertion Loss
- High Rejection

APPLICATIONS


- Communication Systems
- Radar Systems
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWF-27323340-28-H1

Typical Rejection vs. Frequency

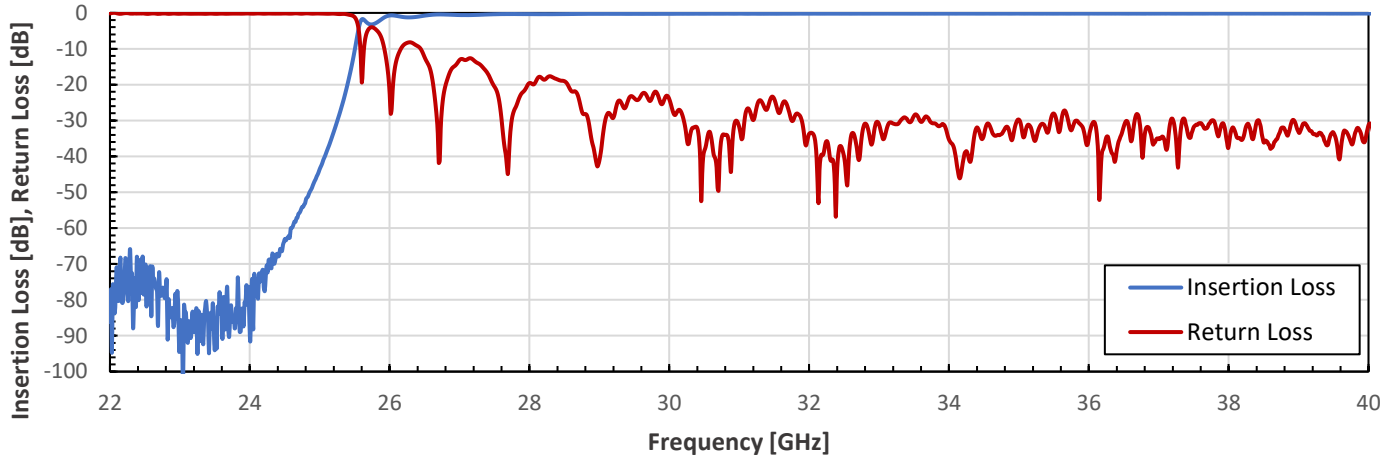

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

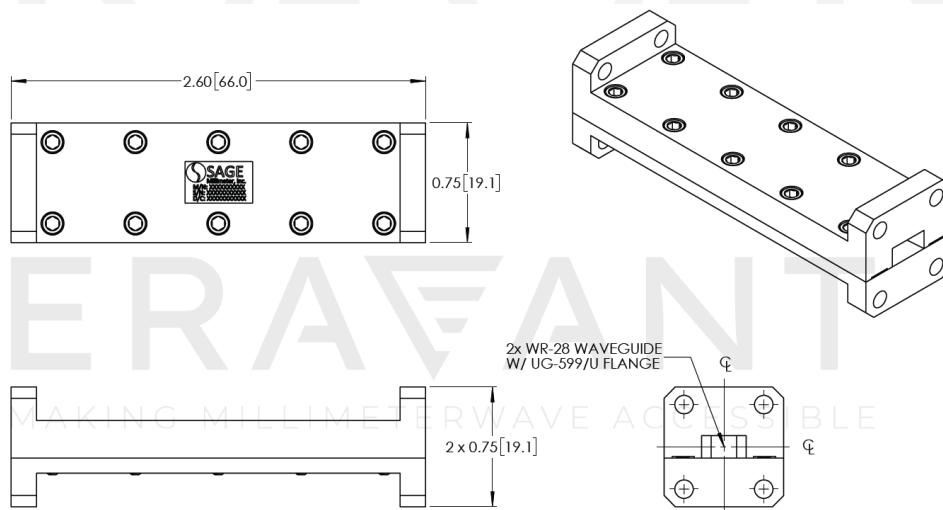

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.