



Waveguide Bandpass Filter, Ka Band, 22 to 38 GHz

Description:

Model SWF-30316350-28-B2 is a Ka band waveguide bandpass filter with a passband frequency of 22 to 38 GHz and rejection frequencies from DC to 20 GHz and 41 to 60 GHz. The nominal insertion loss of the bandpass filter is 2.0 dB and the typical rejection is 50 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



Features:

- Low Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communication Systems
- Radar Systems
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	22 GHz		38 GHz
Passband Insertion Loss		2.0 dB	
Passband Ripple		± 0.4 dB	
Rejection Frequency, Low Side	DC		20 GHz
Rejection Frequency, High Side	41 GHz		60 GHz
Rejection		50 dB	
Passband VSWR		1.5:1	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:


Item	Specification
Waveguide	WR-28 Waveguide with UG-599/U Flange
Size	3.80" (L) X 0.75" (W) X 0.75" (H)
Material	Brass
Finish	Gold Plated
Weight	4.7 Oz
Outline	WF-LA-3.8






Waveguide Bandpass Filter, Ka Band, 22 to 38 GHz

Simulated Data

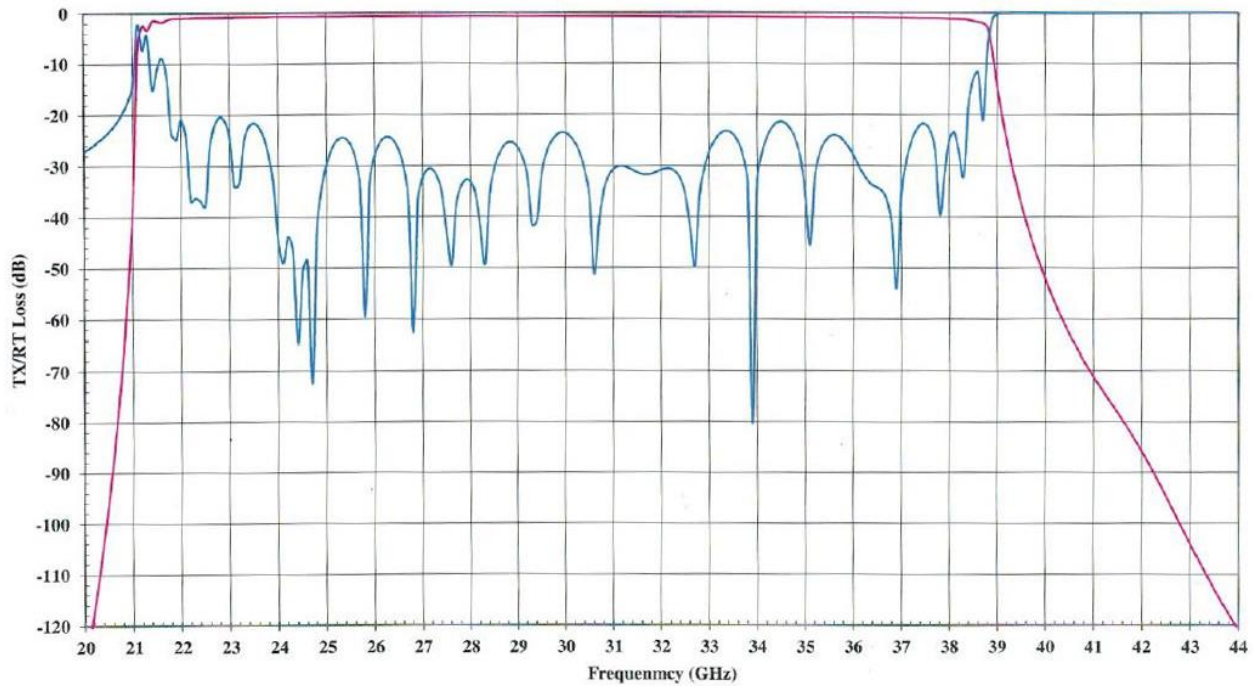

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

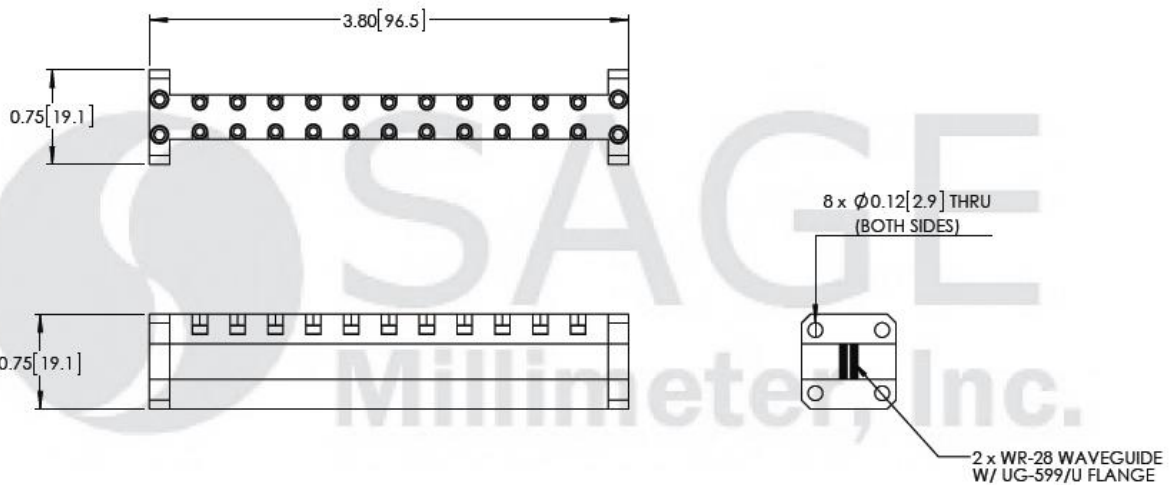

Note:

- All data presented were simulated. Actual data may vary.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com