

Waveguide Bandpass Filter, Ka Band, 32 to 38 GHz

Description:

Model SWF-35306340-28-B1-WPC is a Ka band waveguide bandpass filter with a passband frequency of 32 to 38 GHz and rejection frequencies from DC to 28 GHz and 40 to 46 GHz. The nominal insertion loss of the bandpass filter is 1.8 dB and the typical rejection is 40 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



Features:

- Low Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communication Systems
- Radar Systems
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	32 GHz		38 GHz
Passband Insertion Loss		1.8 dB	
Passband Ripple		±0.2 dB	
Rejection Frequency, Low Side	DC		28 GHz
Rejection Frequency, High Side	40 GHz		46 GHz
Rejection		40 dB	
Passband Return Loss		14 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Parameter	Connector
Waveguide	WR-28 Waveguide with UG-599/U Flange
Material	Brass
Finish	Gold Plated
Weight	1.8 Oz
Size	3.00" (L) X 0.75" (W) X 0.75" (H)
Outline	WF-BA-L1




Waveguide Bandpass Filter, Ka Band, 32 to 38 GHz

Typical Performance vs. Frequency

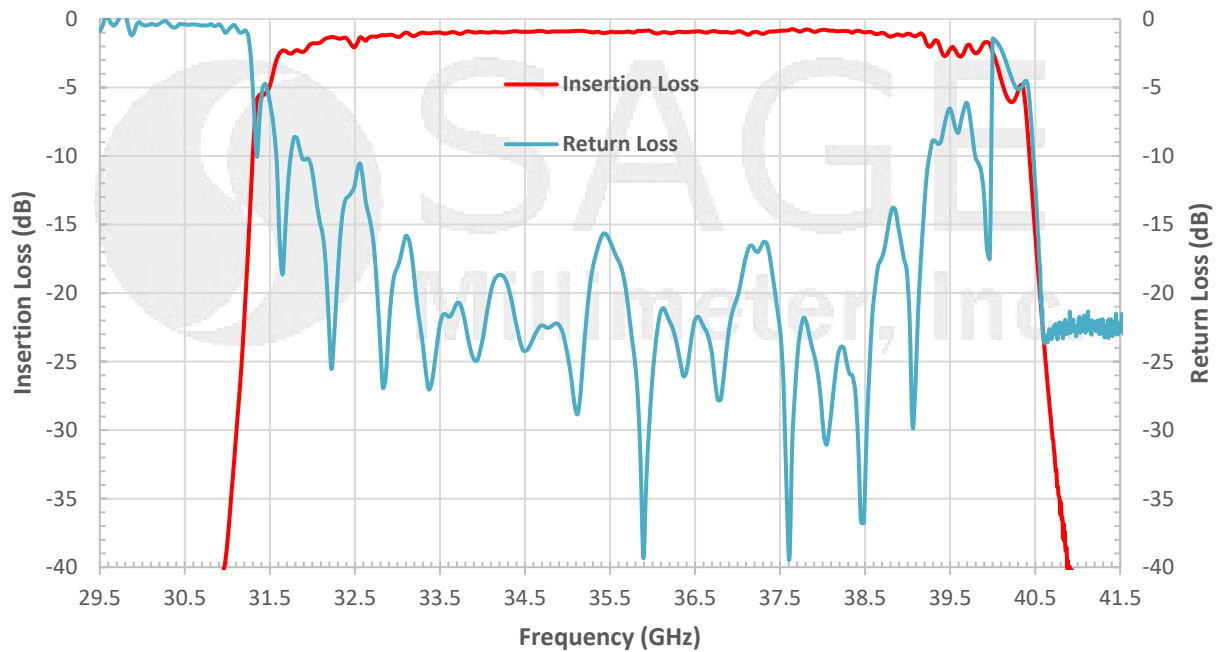

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

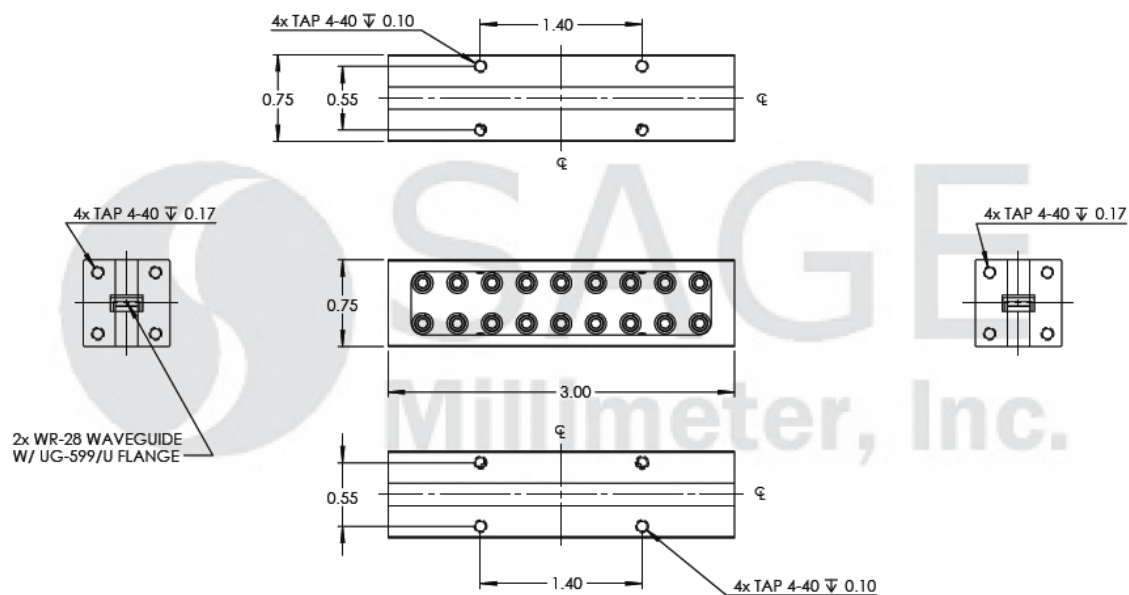



Waveguide Bandpass Filter, Ka Band, 32 to 38 GHz

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

