

2.92 mm (F) to 2.92 mm (F) Coaxial Adapter, Bulkhead

Description:

Model SCT-KFKF-U8-B is a 2.92 mm (K) female to 2.92 mm (K) female coaxial adapter with a bulkhead that covers the frequency range of DC to 40 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a high return loss and typical insertion loss of 0.4 dB. The impedance of the adapter is 50 ohms. Other configurations are available under different model numbers.



Features:

- Instrumentation Grade
- High Return Loss
- Low Insertion Loss

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		40 GHz
Insertion Loss		0.4 dB	
Return Loss		20 dB	
Impedance		50 Ω	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
Connector 1 Type	2.92 mm (K) Female
Connector 2 Type	2.92 mm (K) Female
Panel Wall Thickness	0" [0 mm](Min) to 0.276" [7 mm](Max)
Body Material	Stainless Steel
Body Finish	Passivated
Contact Material	Beryllium Copper
Insulator Material	PEI
Adapter Body Style	Bulkhead
Weight	0.2 Oz
Outline	CT-KFKF-B-SR1




2.92 mm (F) to 2.92 mm (F) Coaxial Adapter, Bulkhead

Typical Performance vs. Frequency

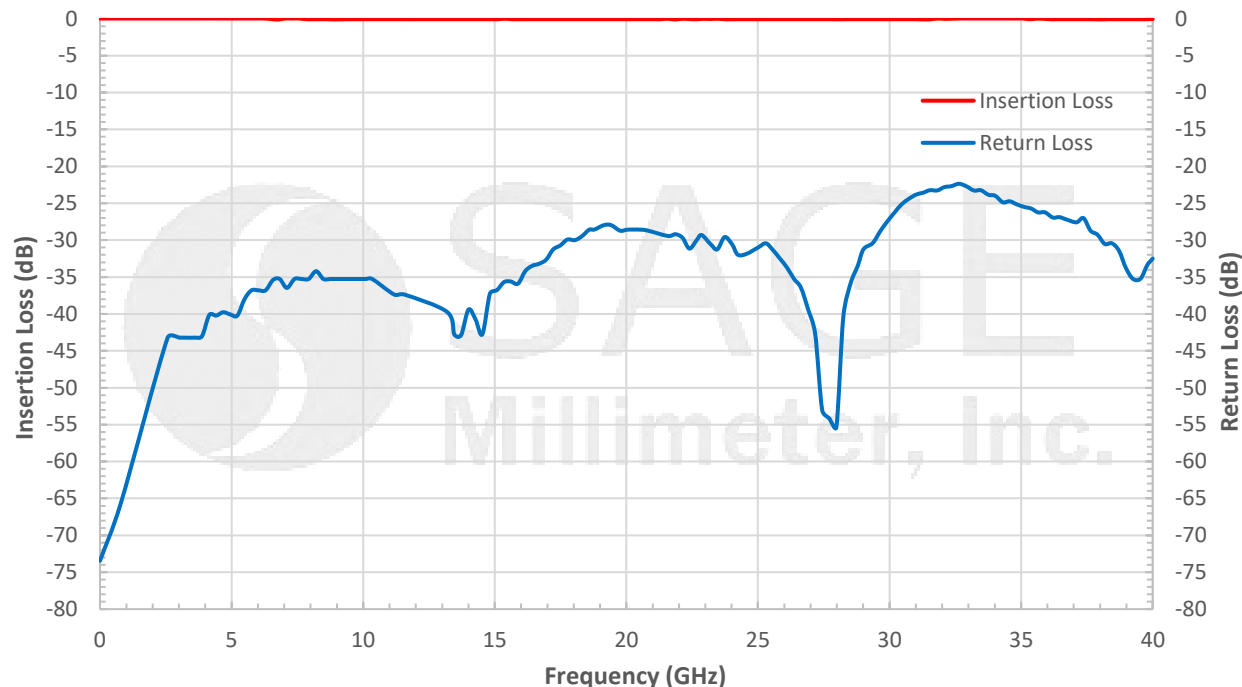

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

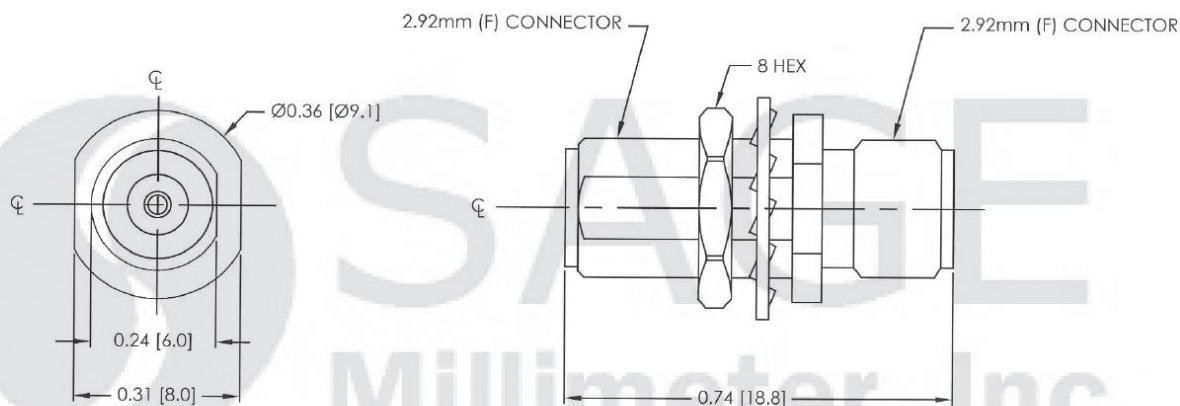**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

