



Waveguide Bandpass Filter, E Band, 60 to 70 GHz

Description:

Model SWF-65310350-12-B1 is a E band waveguide bandpass filter with a passband frequency of 60 to 70 GHz as well as rejection frequencies from DC to 55 GHz and 75 to 90 GHz. The nominal insertion loss of the bandpass filter is 3.0 dB and the typical rejection is 50 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



Features:

- Low Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communication Systems
- Radar Systems
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	60 GHz		70 GHz
Passband Insertion Loss		3.0 dB	
Passband Ripple		±0.4 dB	
Rejection Frequency, Low Side	DC GHz		55 GHz
Rejection Frequency, High Side	75 GHz		90 GHz
Rejection	45 dB	50 dB	
Passband Return Loss		14 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:


Item	Specification
Waveguide	WR-12 Waveguide with UG-387/U Flange
Size	2.2" (L) X 0.75" (W) X 0.75" (H)
Material	Brass
Finish	Gold Plated
Weight	2.4 Oz
Outline	WF-LE





Waveguide Bandpass Filter, E Band, 60 to 70 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

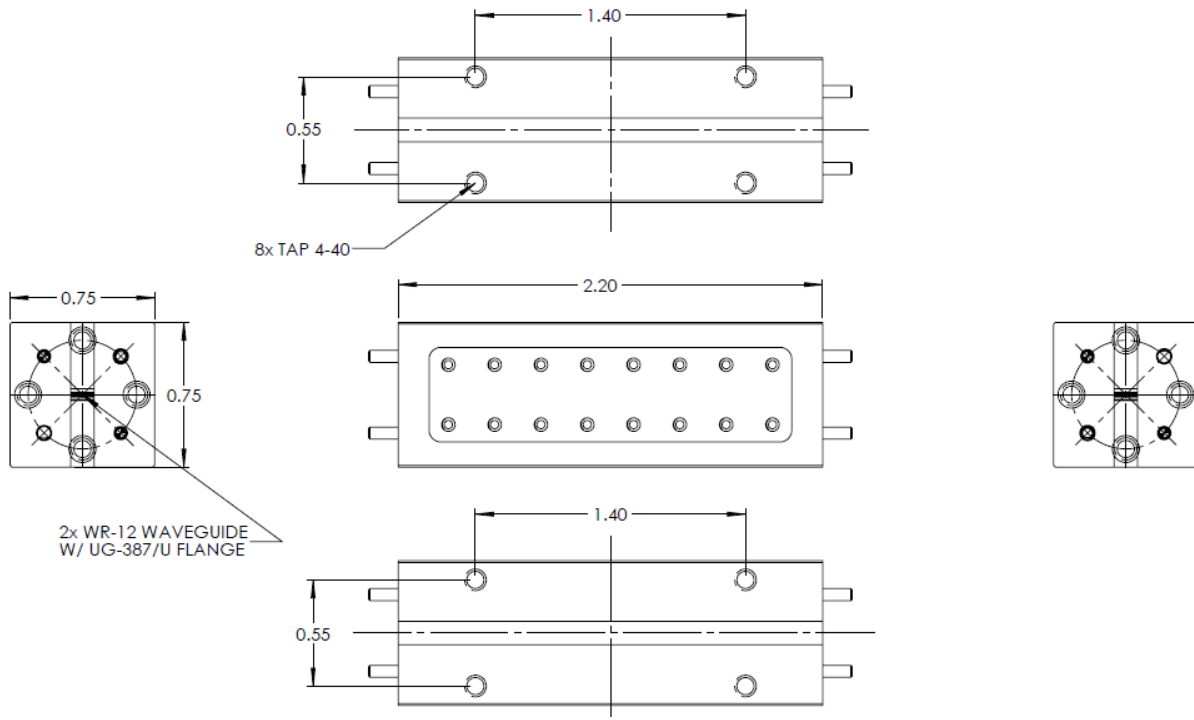

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

