

SWF-95303340-10-B1

Waveguide Bandpass Filter, W Band, 93.5 to 96.5 GHz

SWF-95303340-10-B1 is a W band waveguide bandpass filter with a passband frequency of 93.5 to 96.5 GHz and rejection frequencies from DC to 89 GHz and 100 to 110 GHz. The nominal insertion loss of the bandpass filter is 2.5 dB and the typical rejection is 40 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	93.5 GHz		96.5 GHz
Passband Insertion Loss		2.5 dB	
Passband Ripple		±0.3 dB	
Passband Frequency, Low Side	DC		89 GHz
Passband Frequency, High Side	100 GHz		110 GHz
Rejection	35 dB	40 dB	
Passband Return Loss		14 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
RF Ports	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Insertion Length	1.20" (L) x 0.75" (Ø)
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WF-BW-A

ECCN

EAR99

FEATURES

- Low Cost
- Low Insertion Loss
- High Rejection


APPLICATIONS

- Communication Systems
- Radar Systems
- Sub-assemblies

SUPPLEMENTAL DETAILS




Insertion Loss and Return Loss vs. Frequency

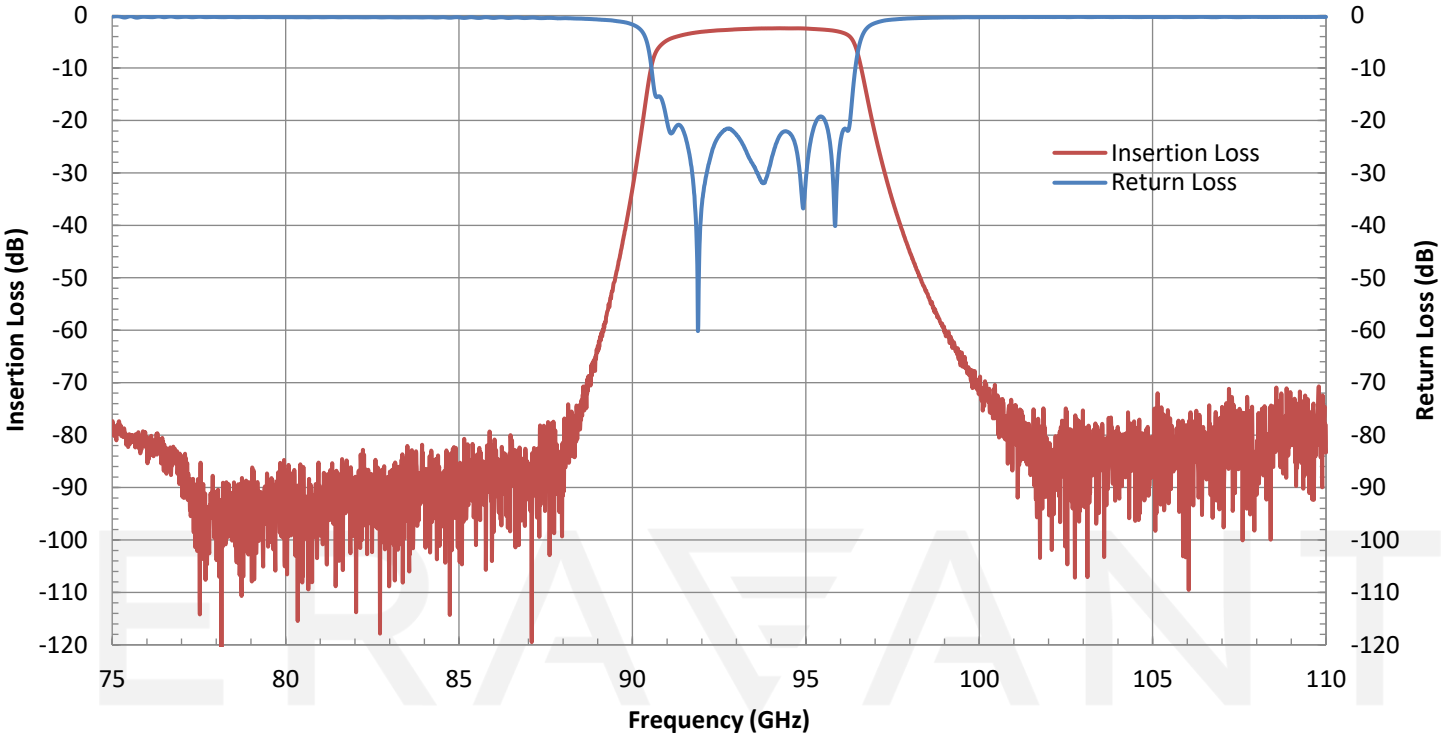

MAKING MILLIMETERWAVE ACCESSIBLE

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

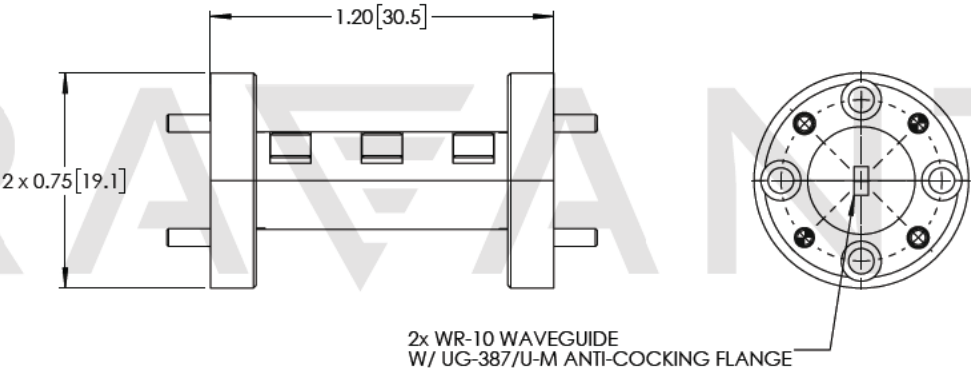

MAKING MILLIMETERWAVE ACCESSIBLE

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE