



WR-28 Waveguide Power Divider, 2-Way, 26.5 to 38.0 GHz

Description:

Model SWP-27338302-28-S1 is a Ka band, 2-way power divider with a typical insertion loss of 0.5 dB across the frequency range of 26.5 to 38 GHz. The divider offers 20 dB isolation and well balanced ports, which can be used for in-phase power dividing or combining. This power divider comes as a right angle configuration with WR-28 waveguides and UG-599/U flanges at the input and all outputs. The inline configuration is offered under model number SWP-27338302-28-E1.



Features:

- Low Insertion Loss
- High Isolation
- Compact Package

Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		38 GHz
Amplitude Unbalance		±0.2 dB	
Insertion Loss		0.4 dB	
Port Isolation		20 dB	
Port Return Loss		20 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Input Port	WR-28 Waveguide with UG-599/U Flange
Output Ports	WR-28 Waveguide with UG-599/U Flange
Material	Aluminum
Finish	Gold Plated
Weight	1.3 Oz
Size	1.00" (L) X 1.00" (W) X 0.88" (H)
Outline	WP-A2-A






WR-28 Waveguide Power Divider, 2-Way, 26.5 to 38.0 GHz

Typical Insertion Loss & Isolation vs. Frequency

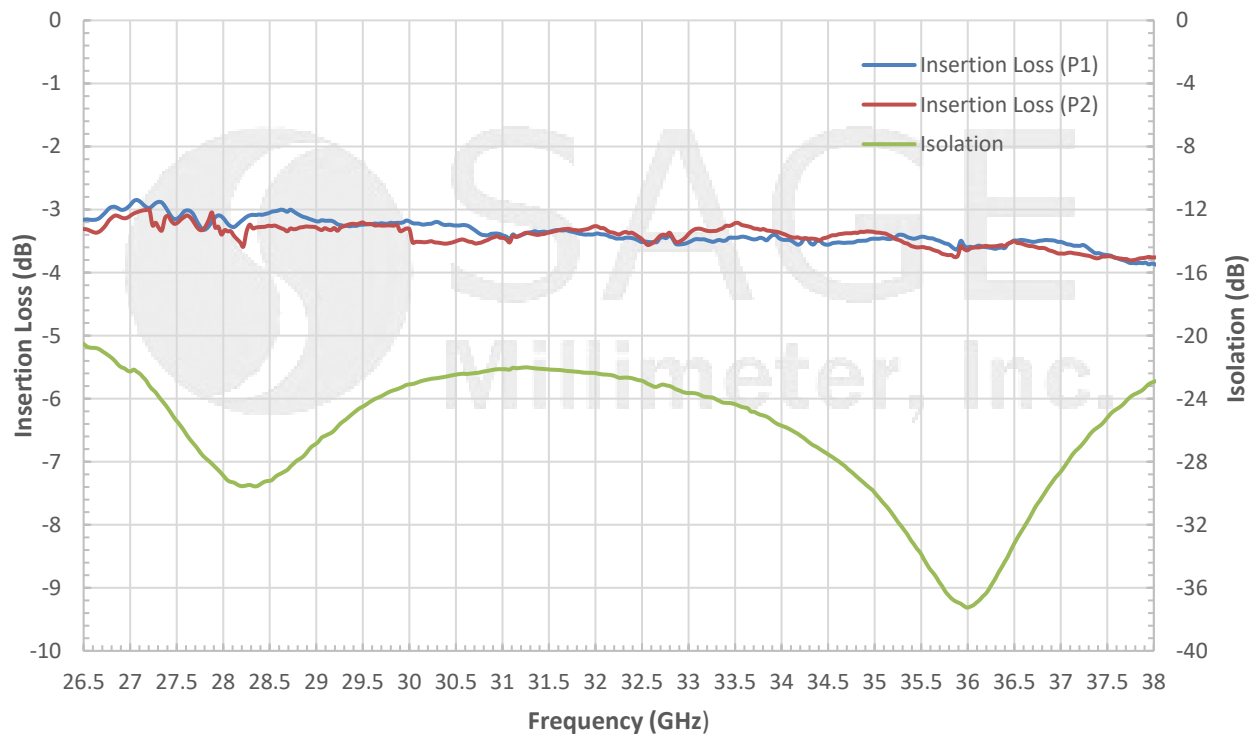

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

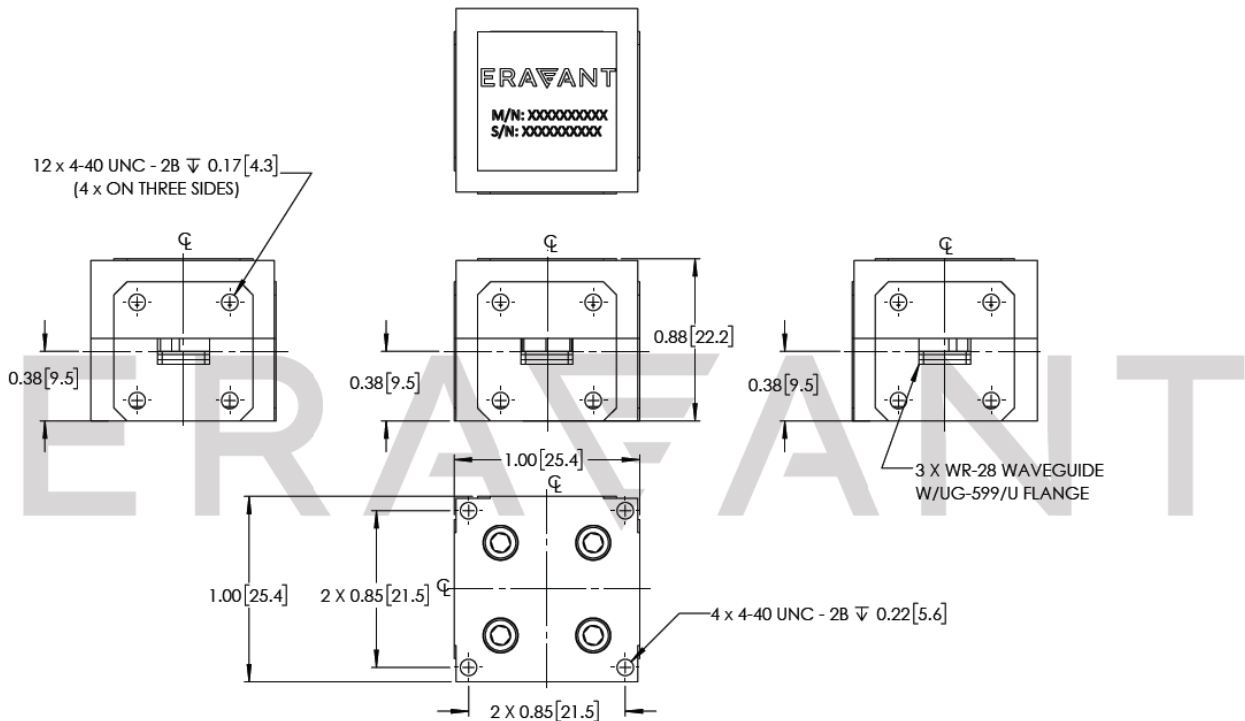

WR-28 Waveguide Power Divider, 2-Way, 26.5 to 38.0 GHz

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

