

## SWP-90310404-10-E1

## Waveguide Power Divider, W Band, 4 Way, 90 to 105 GHz

**SWP-90310404-10-E1** is a W band, 4-way power divider with a typical insertion loss of 1.0 dB across the frequency range of 90 to 105 GHz. The divider offers 20 dB isolation and well balanced ports, which can be used for in-phase power dividing or combining. This power divider comes as an in-line configuration with WR-10 waveguides and UG-387/U-M anti-cocking flanges at the input and all outputs.



## Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	90 GHz		105 GHz
Power Unbalance		±0.2 dB	
Phase Unbalance		±5°	
Insertion Loss		1.0 dB	
Isolation		20 dB	
Input/Output Return Loss		20 dB	
Power Handling		10 W (CW)	50 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

## Mechanical Specifications:

Item	Specification
Input Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Output Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Output Port Separations	1.35" and 0.80"
Material	Aluminum
Finish	Gold Plated
Weight	3.6 Oz
Dimensions	4.30" (W) x 1.30" (L) x 0.75" (H)
Outline	WP-W4I-A

## ECCN

EAR99

## FEATURES

- Low Insertion Loss
- High Isolation
- Inline Configuration


## APPLICATIONS

- Test Labs
- Instrumentation
- Sub-assemblies

## SUPPLEMENTAL DETAILS



**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

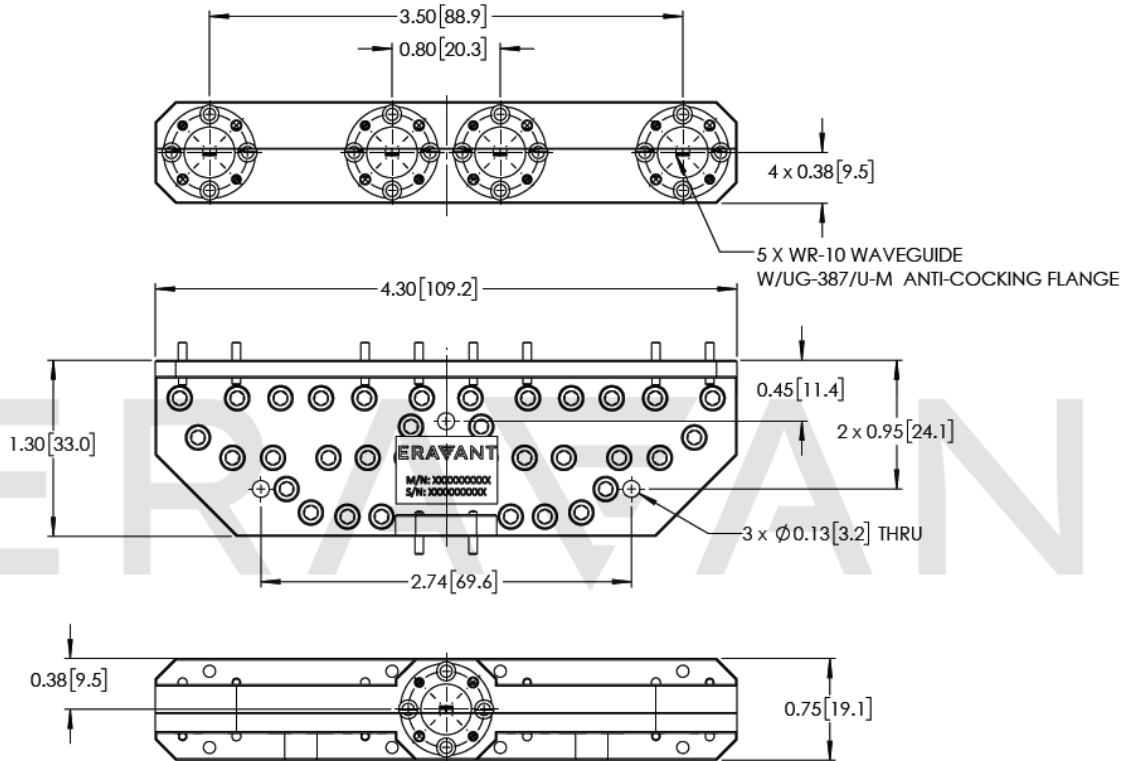

### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.