

WR-08 Waveguide Flange Adapter, 1"

Description:

SWR-387383-08-S1 a 1" long, WR-08 waveguide flange adapter with a UG-387/U-M anti-cocking flange on one end and a UG-383/U-M anti-cocking flange on the other end. The flange waveguide adapter is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide adapter covers the frequency range from 90 to 140 GHz.



Features:

- Frequency Range: 90 to 140 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss


Applications:

- Test Instrumentation
- Sub-assemblies

Mechanical Specifications:

Item	Specification
Flange 1	WR-08 Waveguide with UG-387/U-M Anti-Cocking Flange
Flange 2	WR-08 Waveguide with UG-383/U-M Anti-Cocking Flange
Insertion Length	1.0"
Outline	WR-F-QF-A
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	1.2 Oz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

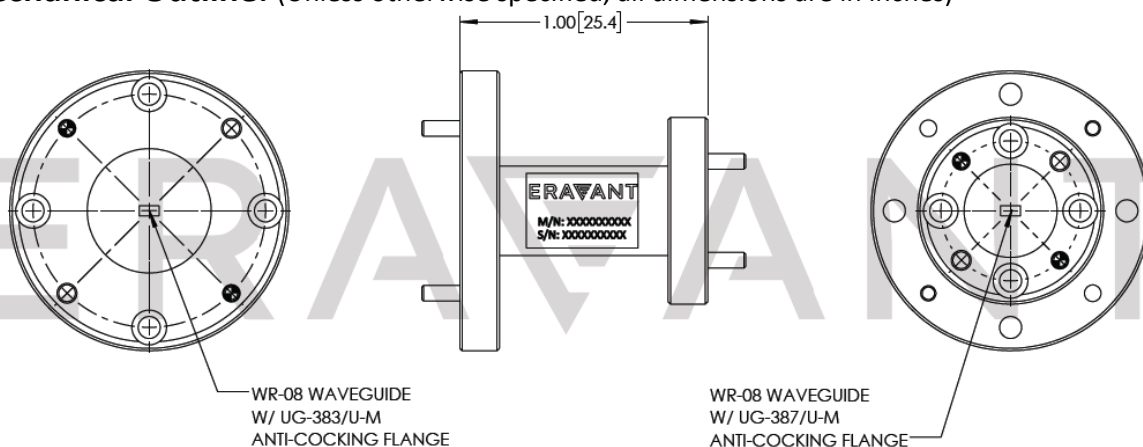

Note:

- Eravant reserves the right to change the information presented without notice.



www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@eravant.com