


## 0.051" Square to 0.067" Circular Waveguide Mode Transition, Compact

### Description:

**Model SWT-051067-SB-C-QC** is a compact 0.051" Square Waveguide to 0.067" Circular Waveguide mode transition. The mode transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The transition has nominal insertion loss and offers a return loss of 25 dB or better. The nominal operating frequency is 115 to 140 GHz.

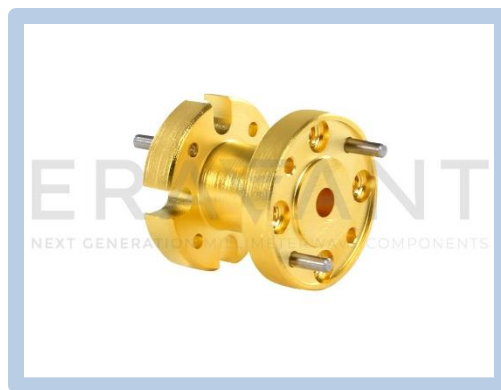

### Features:

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade


### Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

### Mechanical Specifications:

Item	Specifications
Waveguide Size	0.051" Square Waveguide with UG-387/U-M Compatible Anti-Cocking Flange
Waveguide Size	0.067" Circular Waveguide with UG-387/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	0.75 Oz
Insertion Length	0.70"
Outline	WT-GSC-051-067-A-C

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

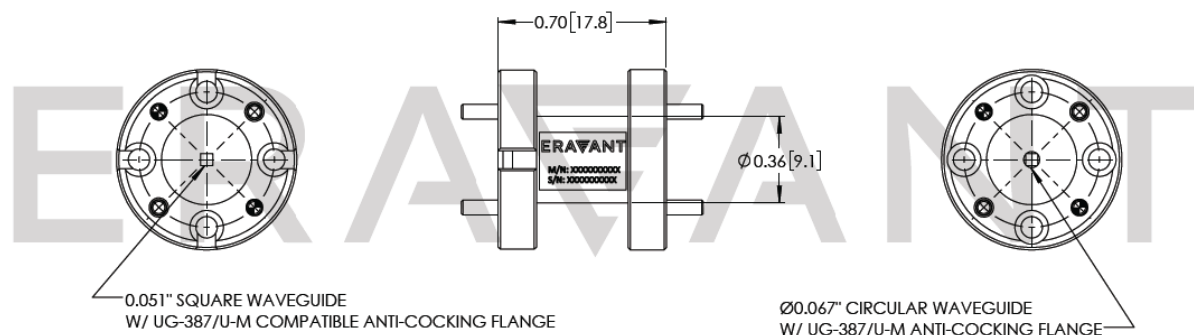

### Note:

- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.