

W Band Diplexer, 76 to 81 GHz and 85 to 90 GHz

Description:

Model SWY-79388335-10-I5 is a W band waveguide diplexer with a low passband of 76 to 81 GHz and a high passband of 85 to 90 GHz. The nominal insertion loss of the diplexer is 1.0 dB and the minimum isolation is 35 dB. Since both low and high passband frequencies can be changed by modifying the design, custom designs are available under different model numbers.



Features:

- Low Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communication Systems
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Low Passband			
Passband Frequency	76 GHz		81 GHz
Passband Insertion Loss		1.0 dB	
Rejection Frequency	85 GHz		90 GHz
Rejection	35 dB		
Return Loss		16 dB	
Group Delay Variation		1.5 ns	
High Passband			
Passband Frequency	85 GHz		90 GHz
Passband Insertion Loss		1.0 dB	
Rejection Frequency	76 GHz		81 GHz
Rejection	35 dB		
Return Loss		16 dB	
Group Delay Variation		1.5 ns	
Power Handling		25 W (CW)	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
Waveguide Ports	WR-10 Waveguide with UG-387/U-M Compatible Flanges
Material	Brass
Finish	Silver Plated
Weight	3.5 Oz
Outline	WY-IW-M5




W Band Diplexer, 76 to 81 GHz and 85 to 90 GHz

Typical Lowpass Insertion Loss and Return Loss vs. Frequency

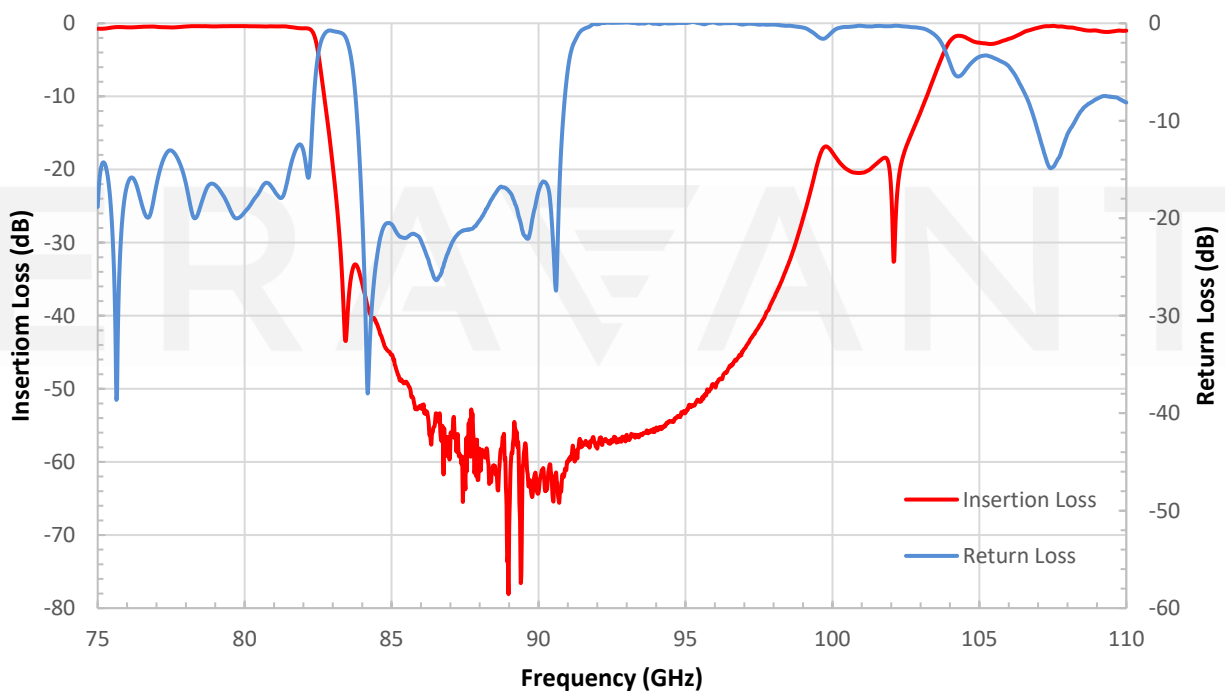


Typical Highpass Insertion Loss and Return Loss vs. Frequency

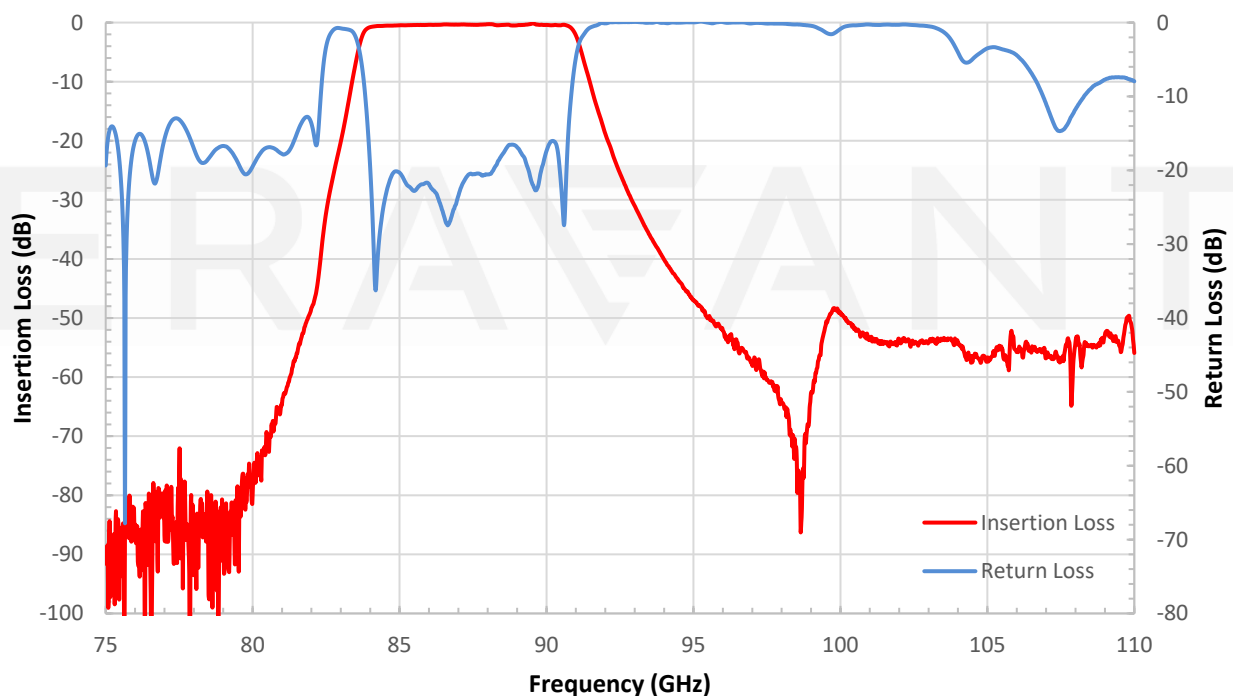

W Band Diplexer, 76 to 81 GHz and 85 to 90 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

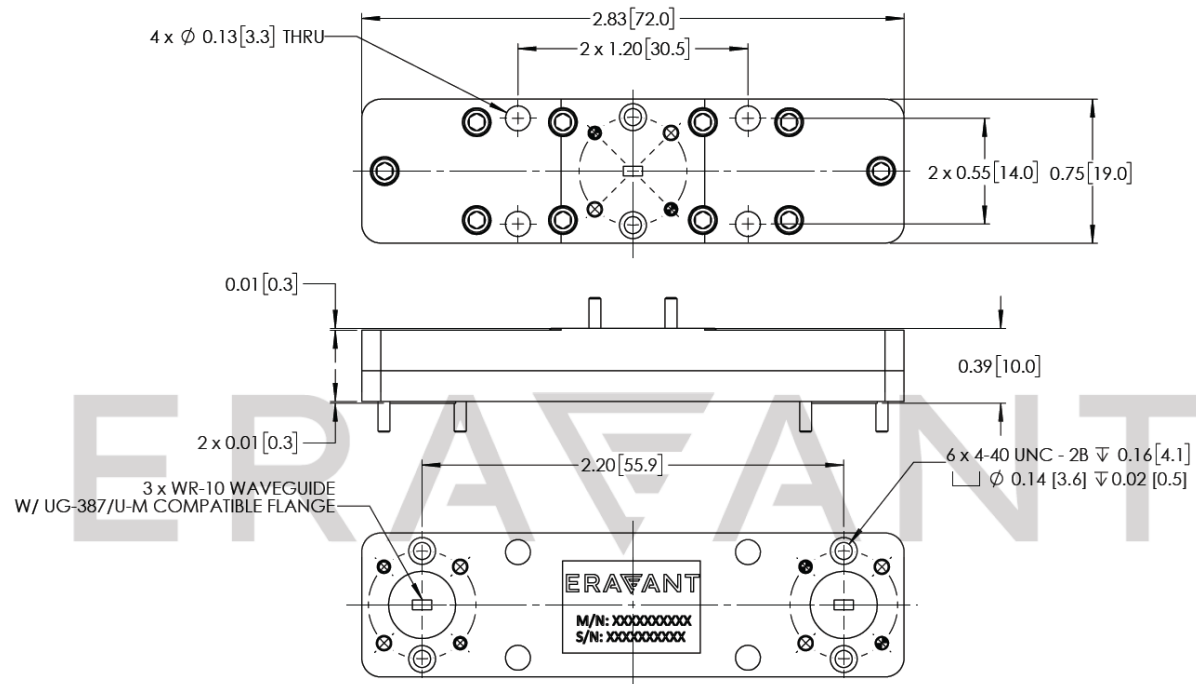

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Any foreign objects into the waveguide will cause performance degradation and possible device damage.

