


SAG-1441544002-06-S1

D Band Gaussian Optics Antenna, 3"

SAG-1441544002-06-S1 is a 3" D-Band Gaussian antenna that operates from 140 to 150 GHz. The Gaussian antenna delivers a 40 dBi nominal gain and 1.9 degree half power beamwidth. The antenna supports linear polarized waveforms and employs a corrugated feed horn to offer excellent aperture efficiency, high cross polarization rejections, and low sidelobe levels. This model is equipped with a standard WR-06 waveguide and UG-387/U-M anti-cocking flange as its input port. By removing the mode transition, Eravant model number SWT-06059-SB, the input port becomes a 0.059" diameter circular waveguide, which can support both linear and circular polarized waveforms.

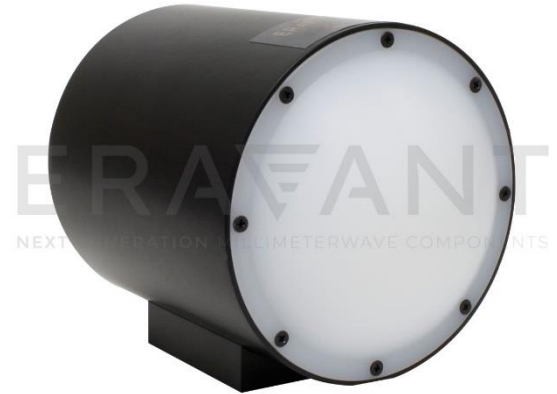

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	140 GHz		150 GHz
Gain		40 dBi	
3 dB Beamwidth		1.9°	
Sidelobes		-20 dB	
Polarization		Linear	
Return Loss		15 dB	

Mechanical Specifications:

Item	Specification
Antenna Port	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Material	Aluminum
Finish	Black Anodized
Weight	1.72 lb
Lens Diameter	3.0"
Dimensions	3.67" (H) x 6.45" (L)
Outline	AG-RD40-A

ECCN

EAR99

FEATURES

- Center Fed
- Low Sidelobes
- Low Cross Polarization


APPLICATIONS

- Radar Systems
- Communication Systems
- Plasma Systems


SUPPLEMENTAL DETAILS




Simulated Antenna Pattern @ 140 GHz

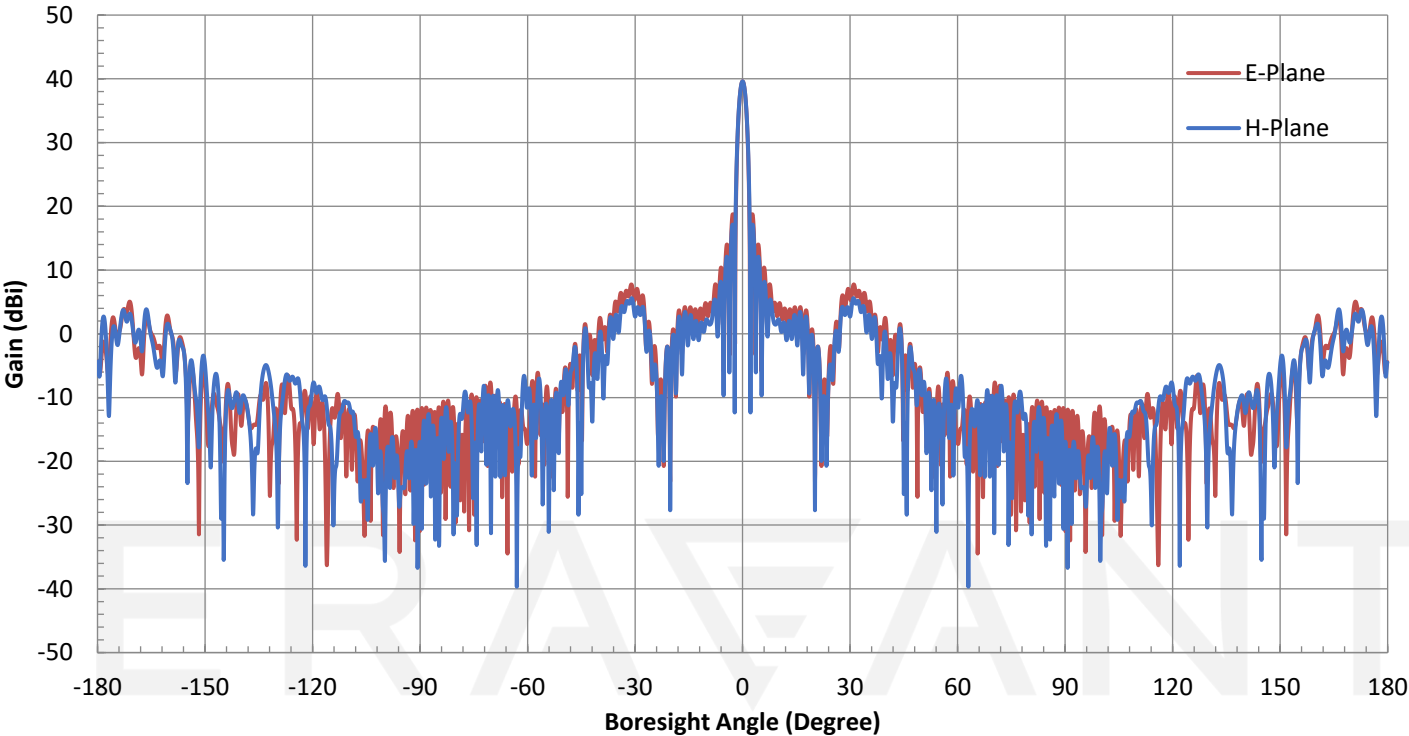


Simulated Antenna Pattern @ 145 GHz

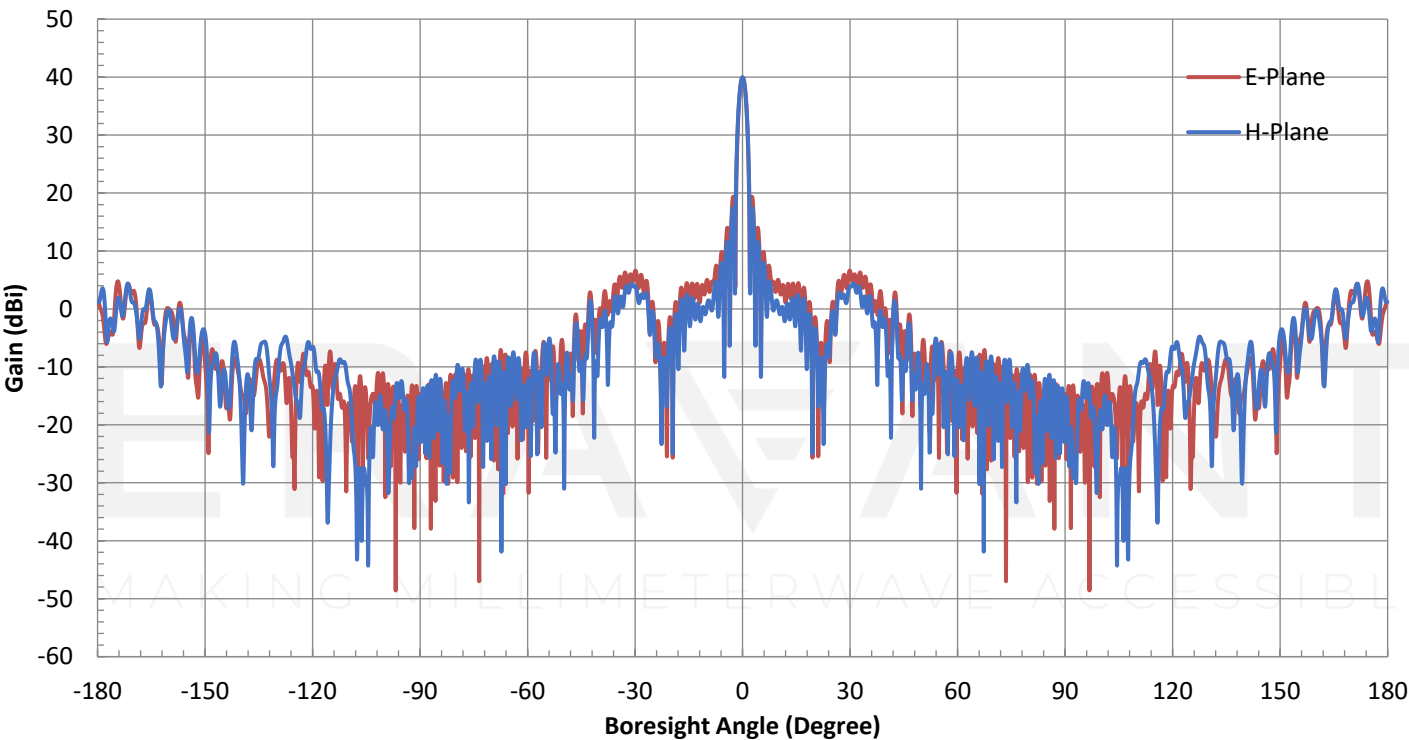


Simulated Antenna Pattern @ 150 GHz

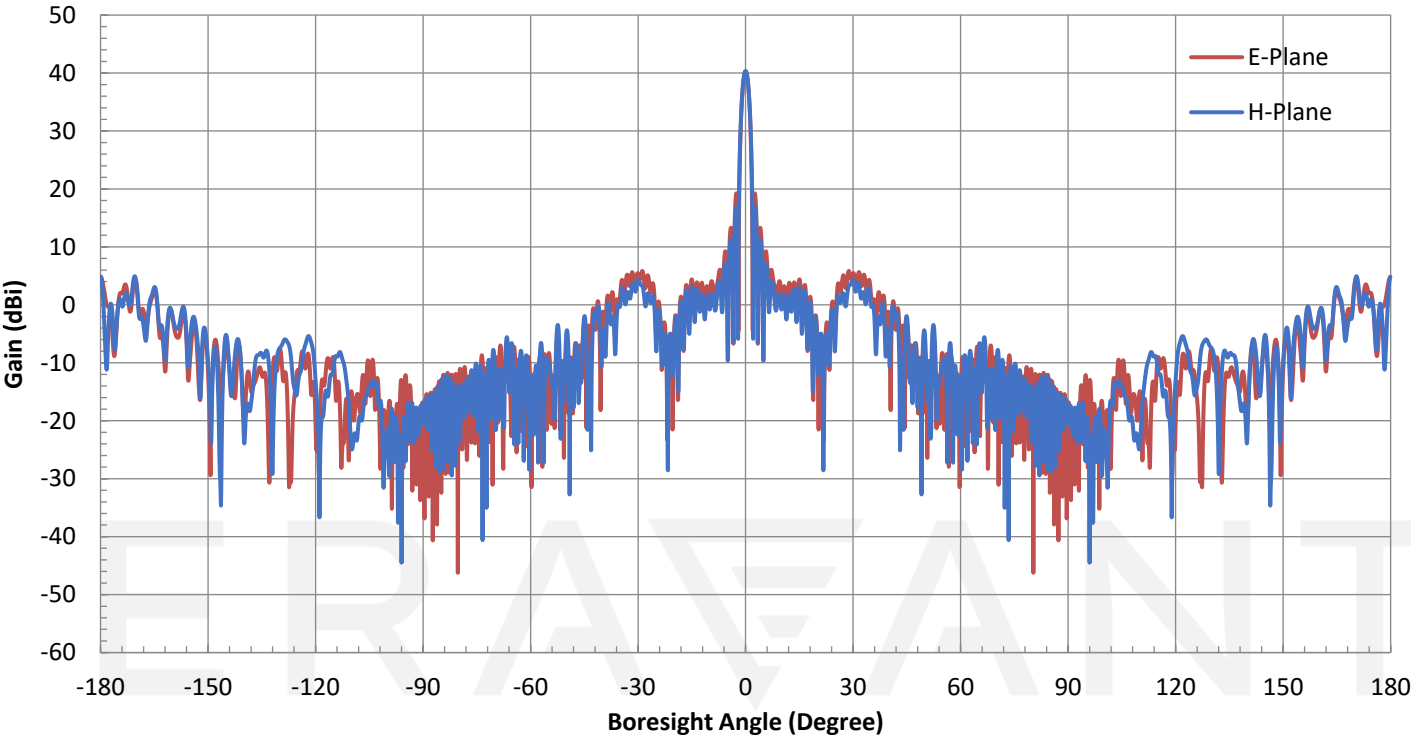


Simulated Gain vs. Frequency

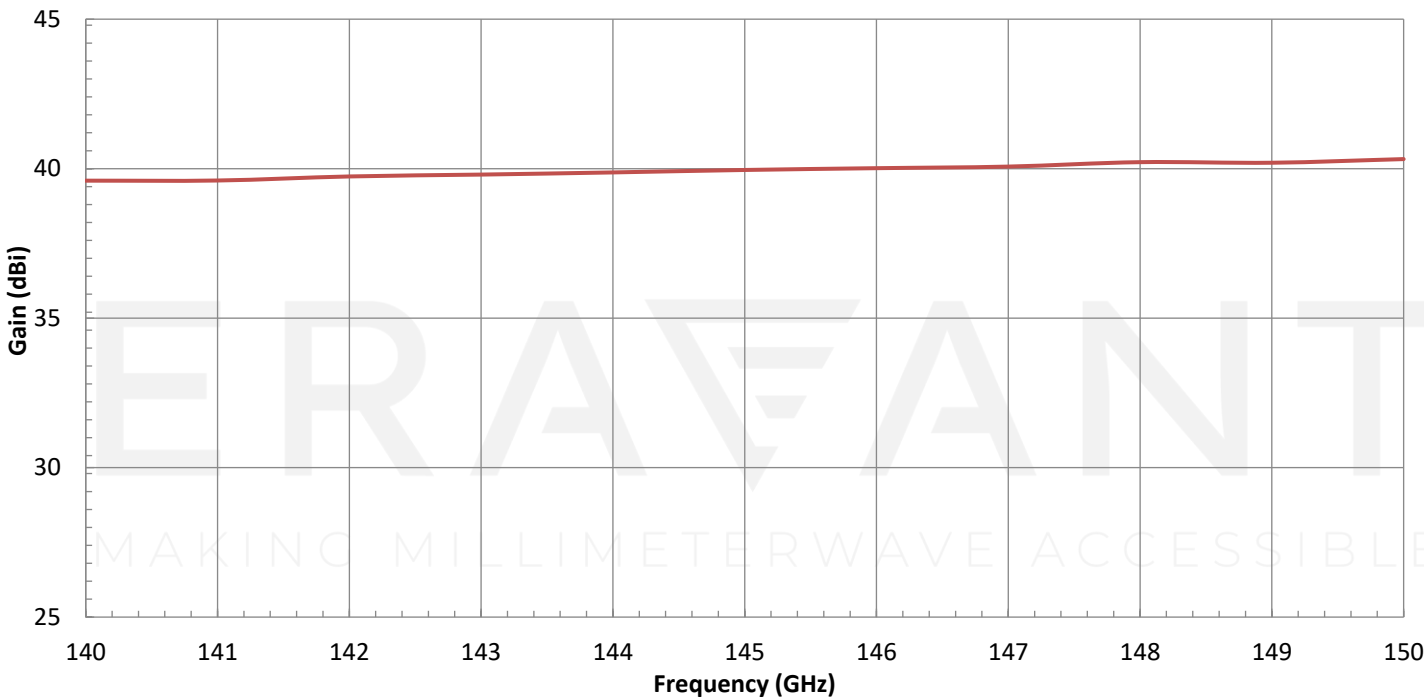

Simulated Return Loss vs. Frequency

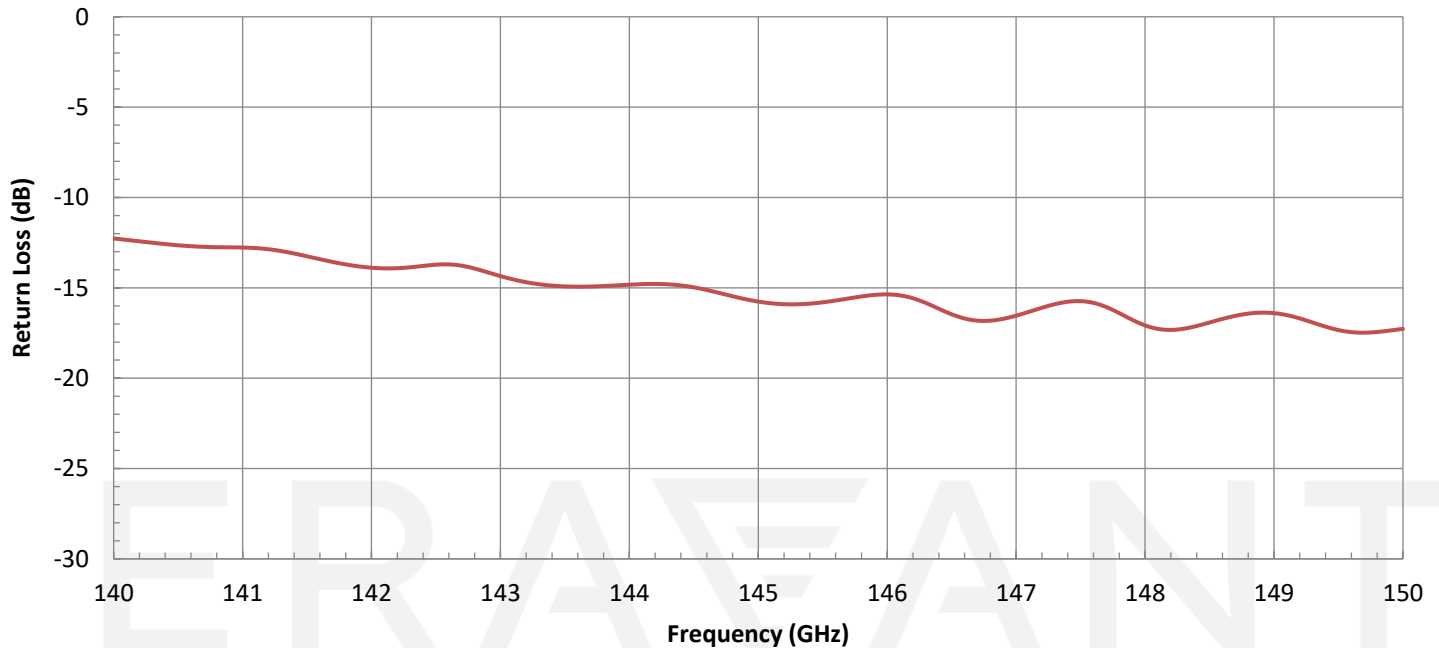

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

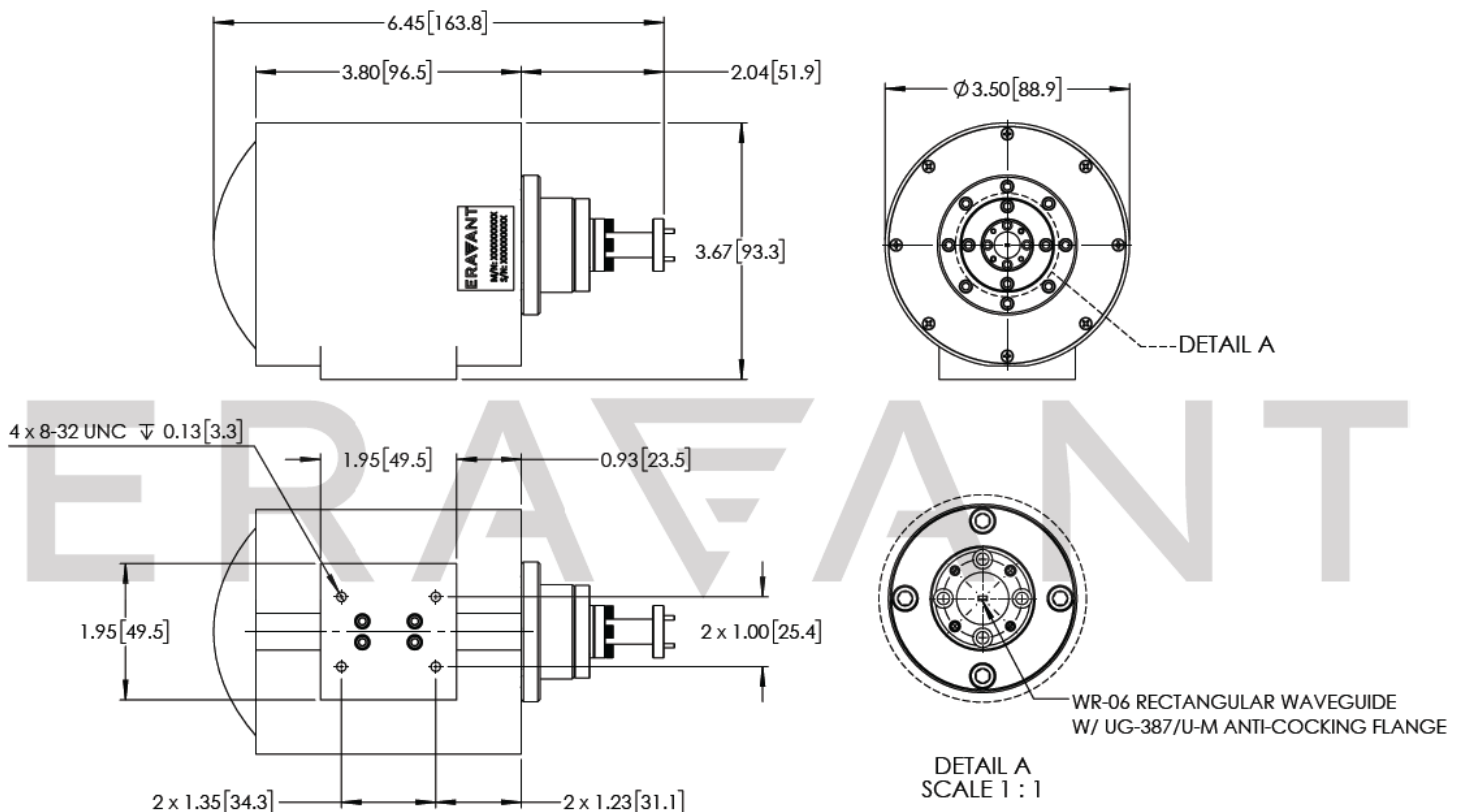

NOTE:

- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.
- The operation frequency of the antenna can be extended to a wider range with small performance degradation at the edges of the band.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE