

SWB-12090-HB

WR-12 H-Plane Waveguide Bend, 90°

SWB-12090-HB is a 90 degree, WR-12 H-plane waveguide bend with UG-387/U anti-cocking flanges. The bend radius is 0.75". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 60 to 90 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-12 Waveguide with UG-387/U Anti-Cocking Flanges
Bend Plane	H Plane
Bend Angle	90 Degrees
Bend Radius	0.75"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.7 Oz
Outline	WB-HE-A

ECCN

EAR99

FEATURES

- Frequency Coverage: 60.0 to 90.0 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentation
- Sub-assemblies
- Lab Use

SUPPLEMENTAL DETAILS



SWB-12090-HB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

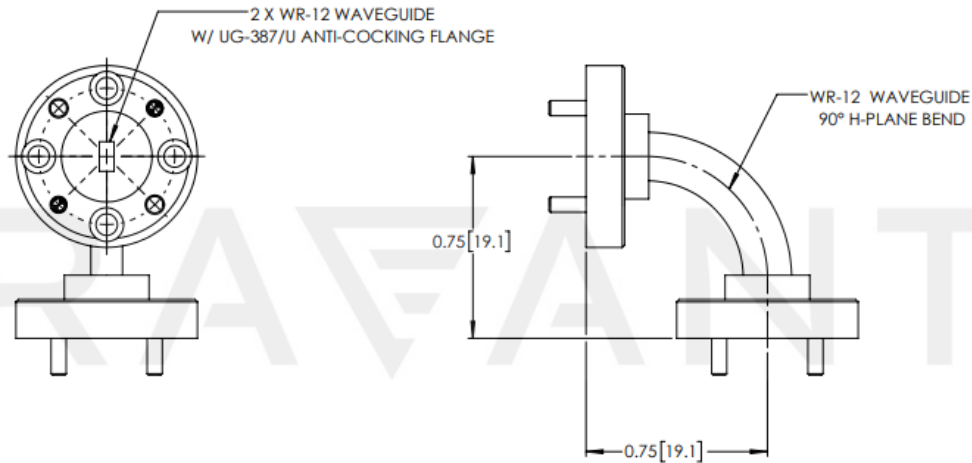

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.