

SAC-1055-141-S2

WR-15 Conical Horn Antenna, 10 dBi Gain

SAC-1055-141-S2 is a V-band conical horn antenna that operates from 58 to 68 GHz. The antenna offers 10.4 dBi nominal gain and a typical half power beamwidth of 49 degrees on the E-Plane and 60 degrees on the H-Plane. The horn also offers typical sidelobes of -30 dB on the E-Plane and -15 dB on the H-Plane. The conical horn antenna can support linear and circular polarization. The input of this antenna is a 0.141" diameter circular waveguide with UG-385/U anti-cocking flange.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	58 GHz		68 GHz
Gain		10 dBi	
3 dB Beamwidth, E-plane		49°	
3 dB Beamwidth, H-plane		60°	
Sidelobe, E-plane		-30 dB	
Sidelobe, H-plane		-15 dB	
Return Loss		23 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Antenna Port	0.141" Diameter Circular Waveguide
Flange Type	UG-385/U Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	0.6 Oz
Size	1.14" (L) X 0.75" (Ø)
Outline	AC-CV10-141-A

ECCN

EAR99

FEATURES

- Circular Waveguide Interface
- Precisely Machined and Gold Plated
- Linear and Circular Polarization

APPLICATIONS


- Antenna Ranges
- Feed Horns
- System Setups

SUPPLEMENTAL DETAILS




SAC-1055-141-S2


Simulated Antenna Patterns @ 58 GHz

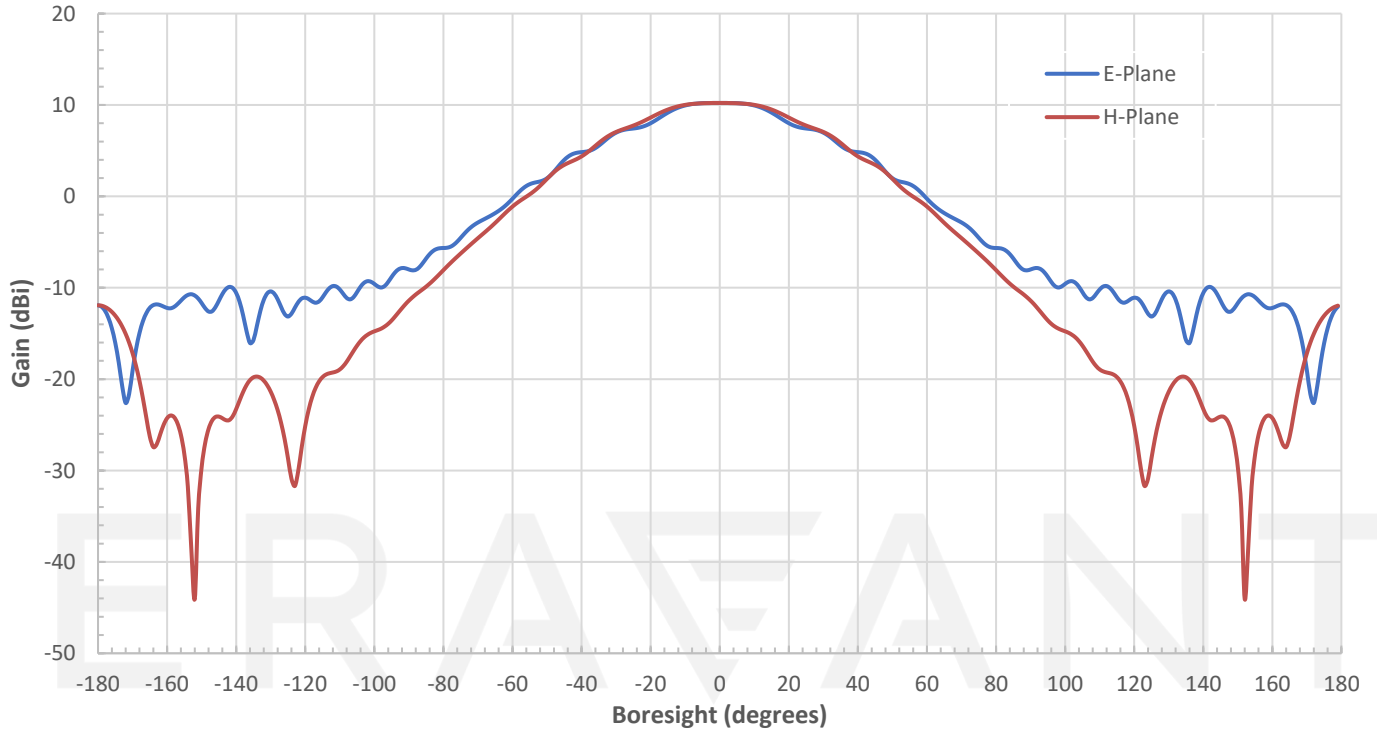


Simulated Antenna Patterns @ 63 GHz

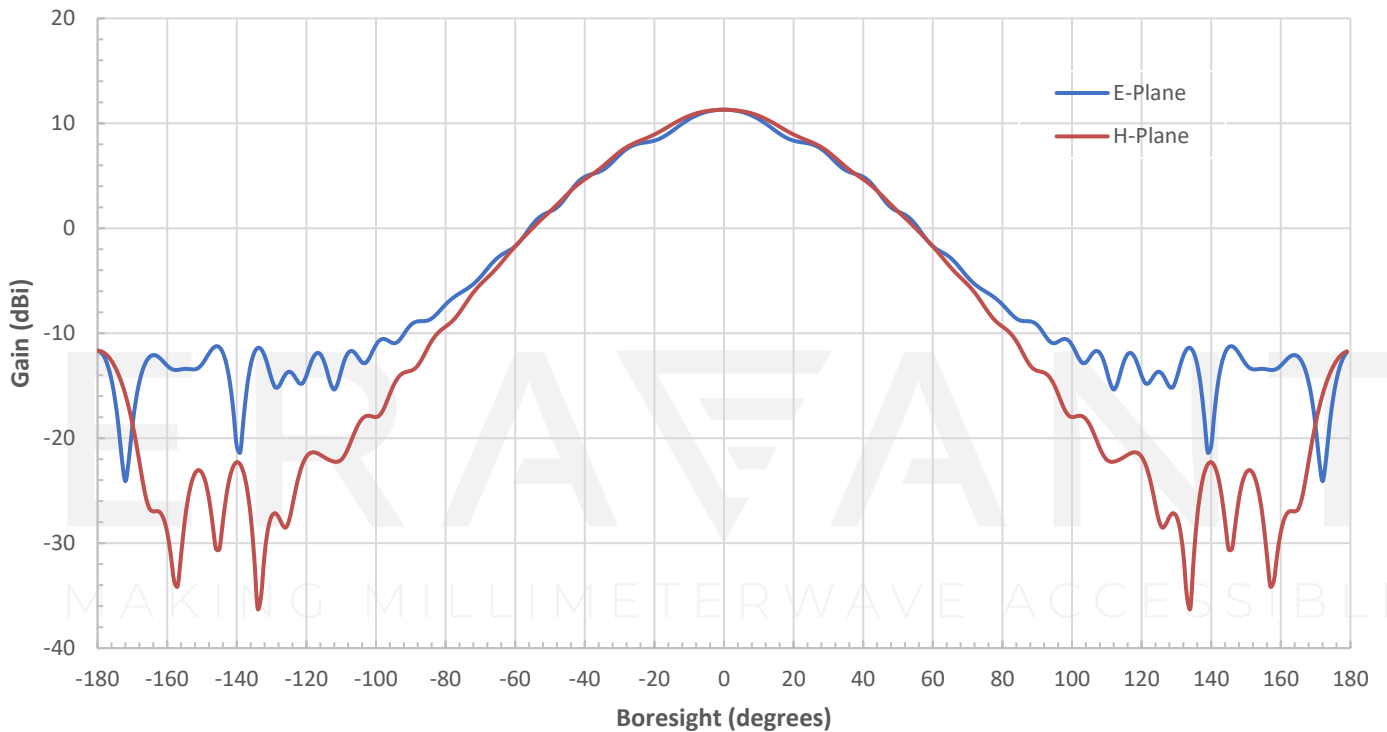

Simulated Antenna Patterns @ 68 GHz

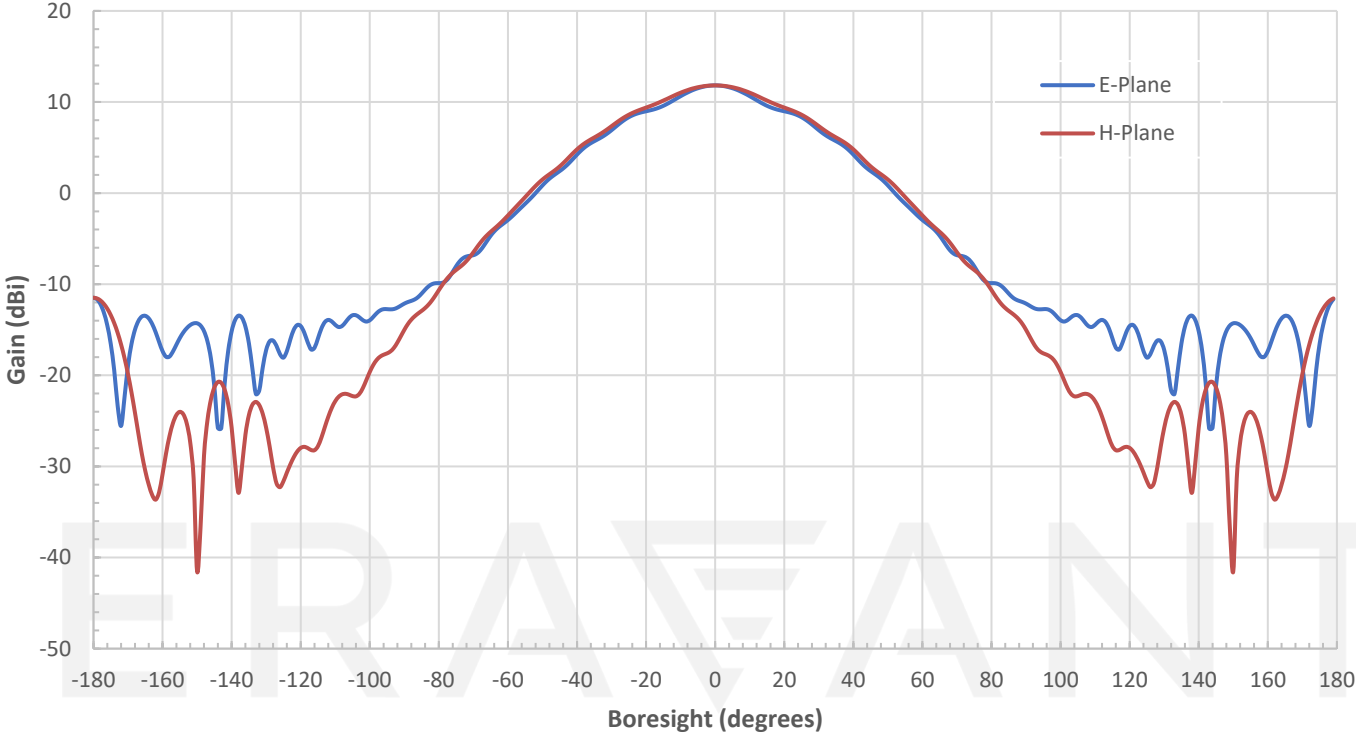


Simulated Return Loss vs. Frequency

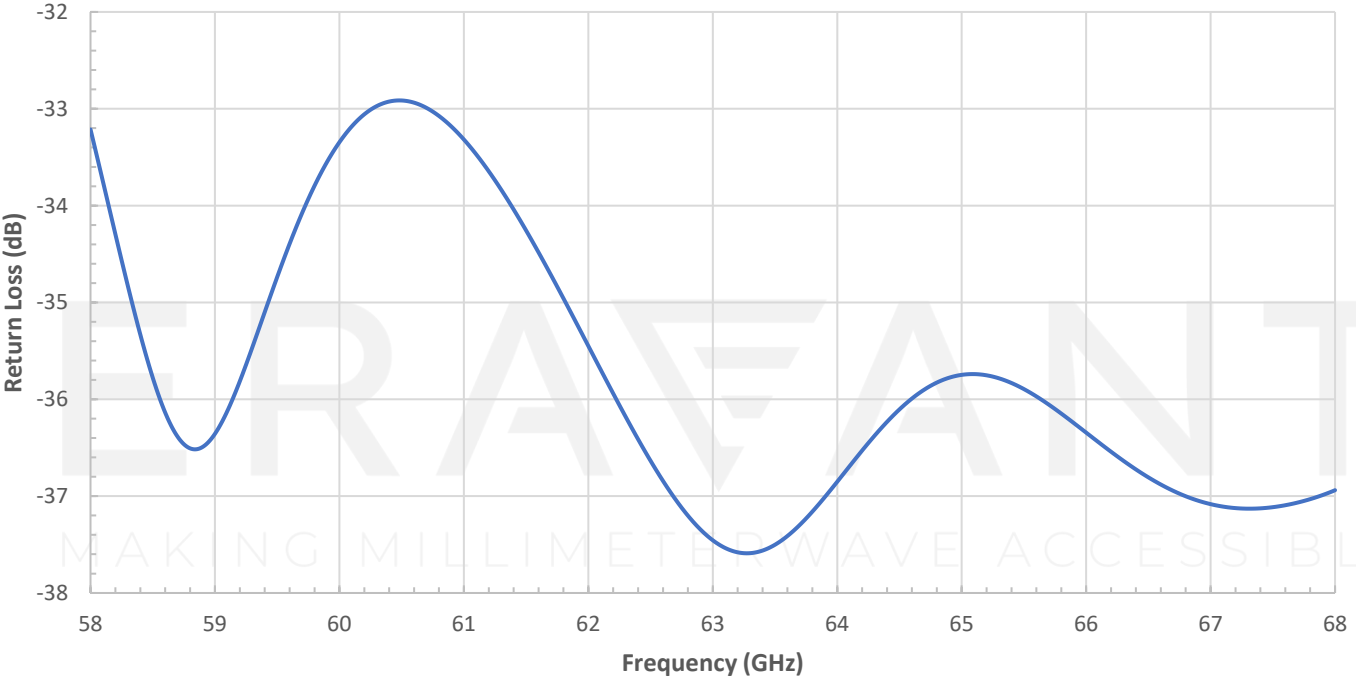


SAC-1055-141-S2

Simulated Gain vs. Frequency

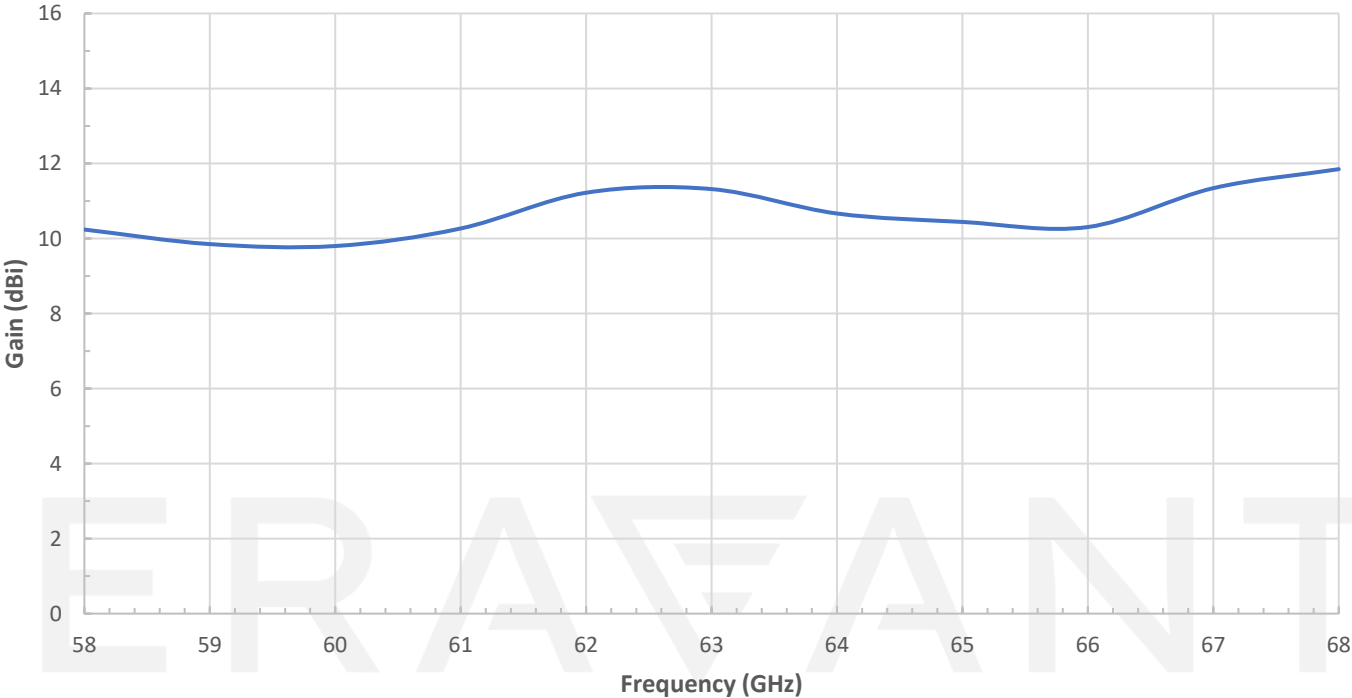

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

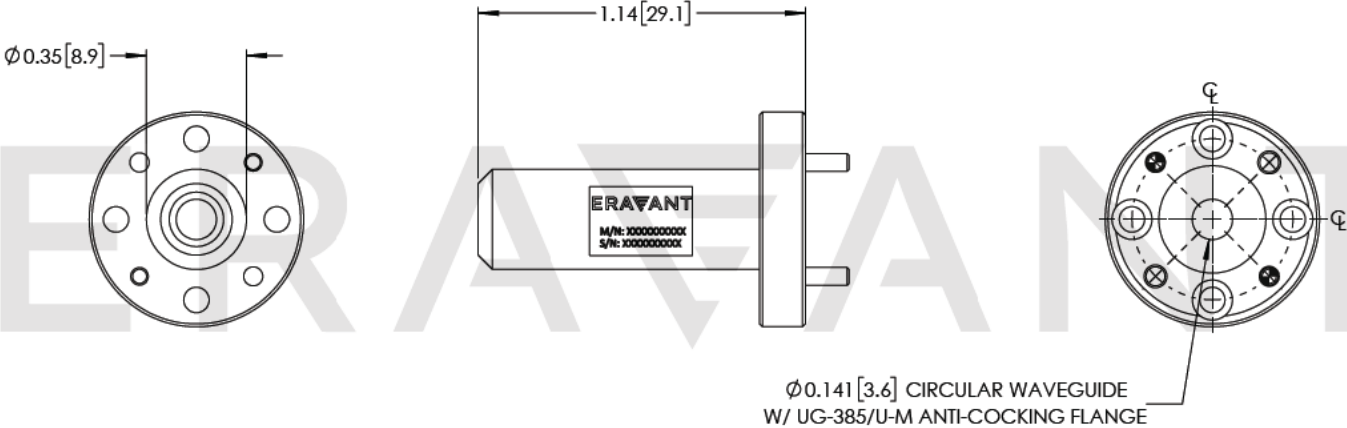

NOTE:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE