

SAC-1533-125-S2

E Band Conical Horn Antenna, 15 dBi Gain

SAC-1533-125-S2 is an E-band conical horn antenna that operates from 68 to 77 GHz. The antenna offers 15 dB nominal gain and a typical half power beamwidth of 30 degrees on the E-plane and 36 degrees on the H-plane. The horn also offers typical sidelobes of -16 dB on the E-plane and -28 dB on the H-plane. The conical horn can support linear and circular polarization. The input of this antenna is a 0.125" diameter circular waveguide with UG-387/U-M flange.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency*	68 GHz		77 GHz
Gain		15 dBi	
3 dB Beamwidth, E-plane		30°	
3 dB Beamwidth, H-plane		36°	
Sidelobes, E-plane		-16 dB	
Sidelobes, H-plane		-28 dB	
Return Loss		23 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*Note: Can operate from 63 to 90 GHz if the dominant mode is maintained.

Mechanical Specifications:

Item	Specification
Antenna Port	0.125" Diameter Circular Waveguide
Flange Type	UG-387/U-M Flange
Material	Brass
Finish	Gold Plated
Weight	0.5 Oz
Size	0.60" (L) X 0.42" (Ø)
Outline	AC-CE15-125

FEATURES


- Circular Waveguide Interface
- Precisely Machined and Gold Plated
- High Return Loss
- Linear and Circular Polarization

APPLICATIONS


- Antenna Ranges
- Feed Horns
- System Setups




Simulated Antenna Patterns @ 68 GHz

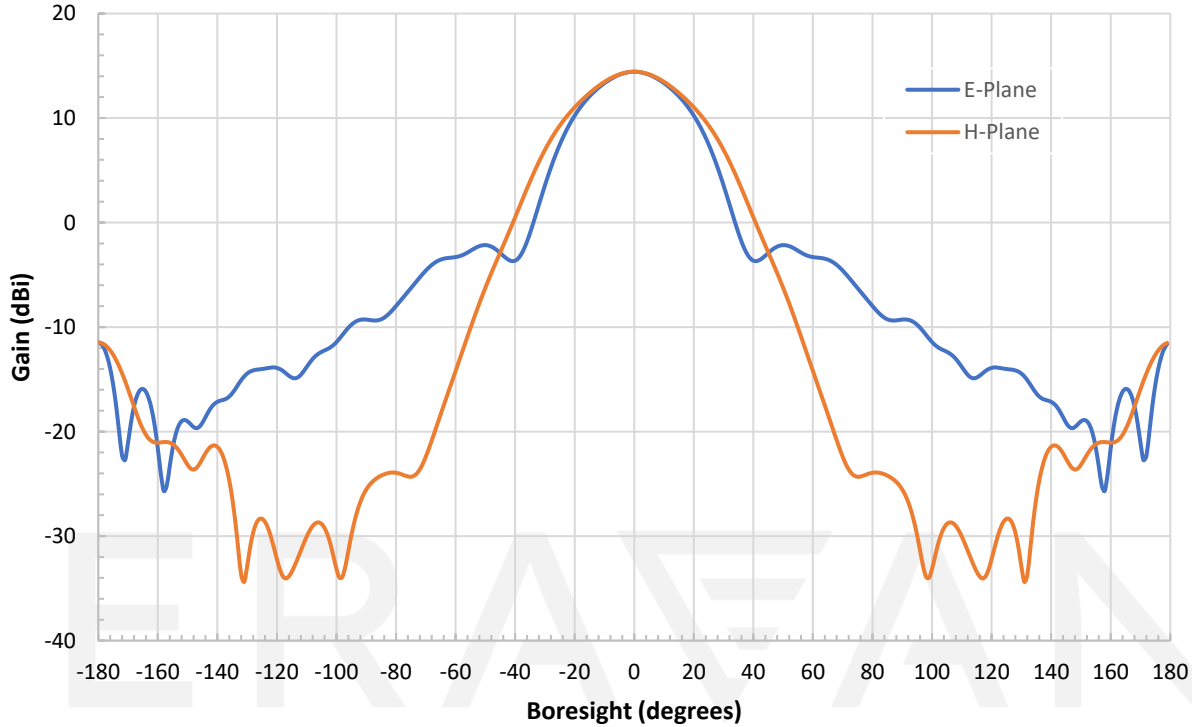


Simulated Antenna Patterns @ 72 GHz

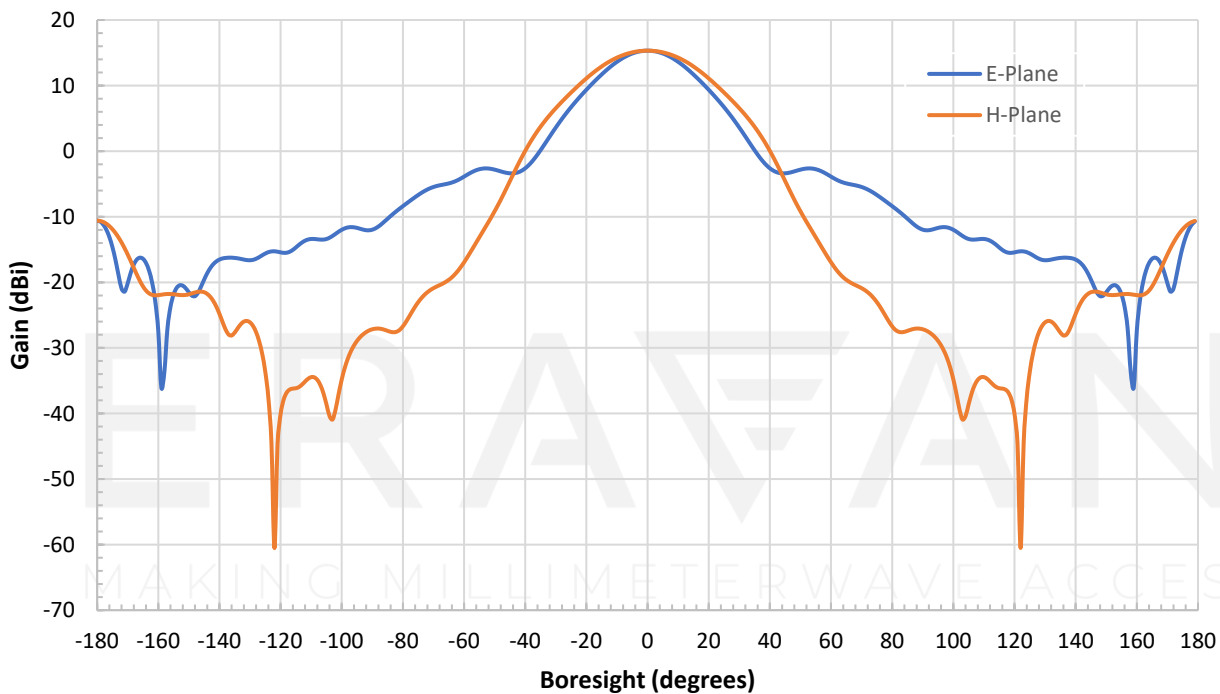

Simulated Antenna Patterns @ 77 GHz

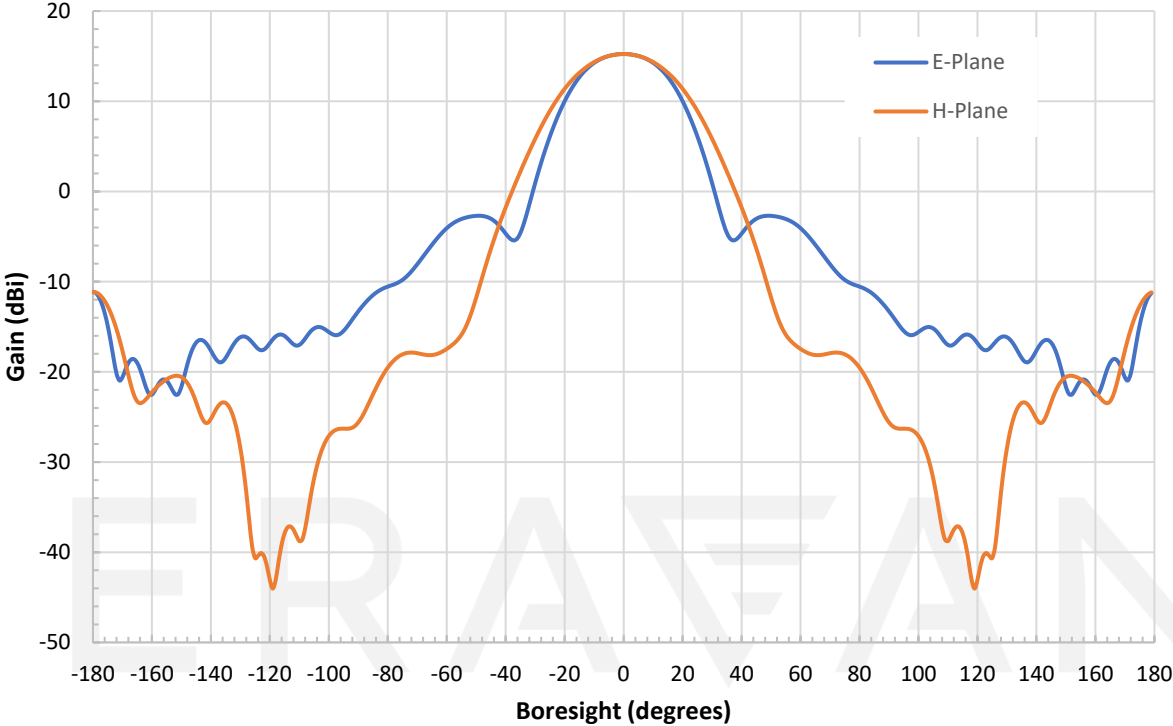


Simulated Return Loss vs. Frequency

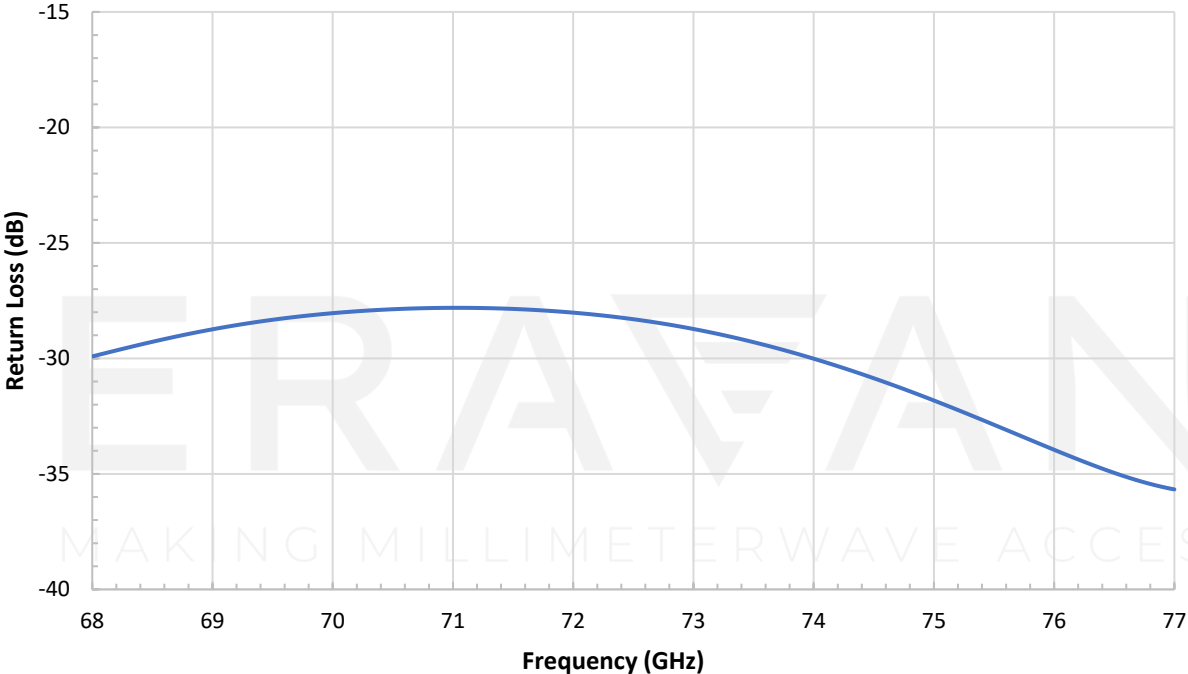


SAC-1533-125-S2

Simulated Gain vs. Frequency

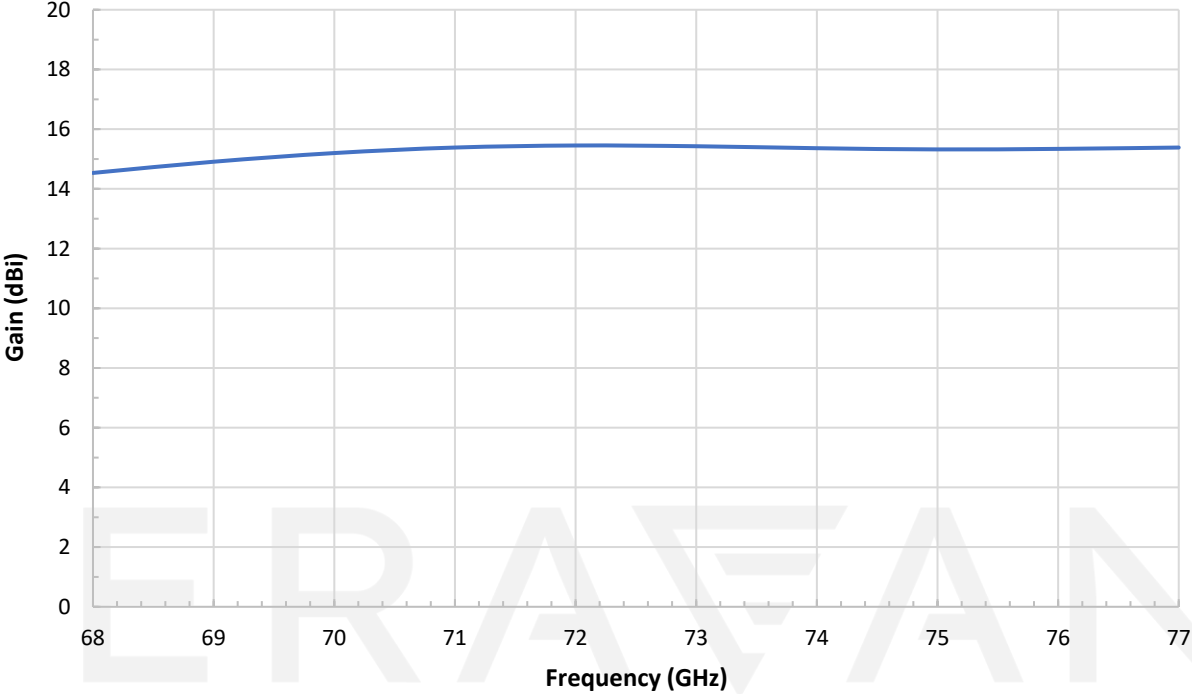

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

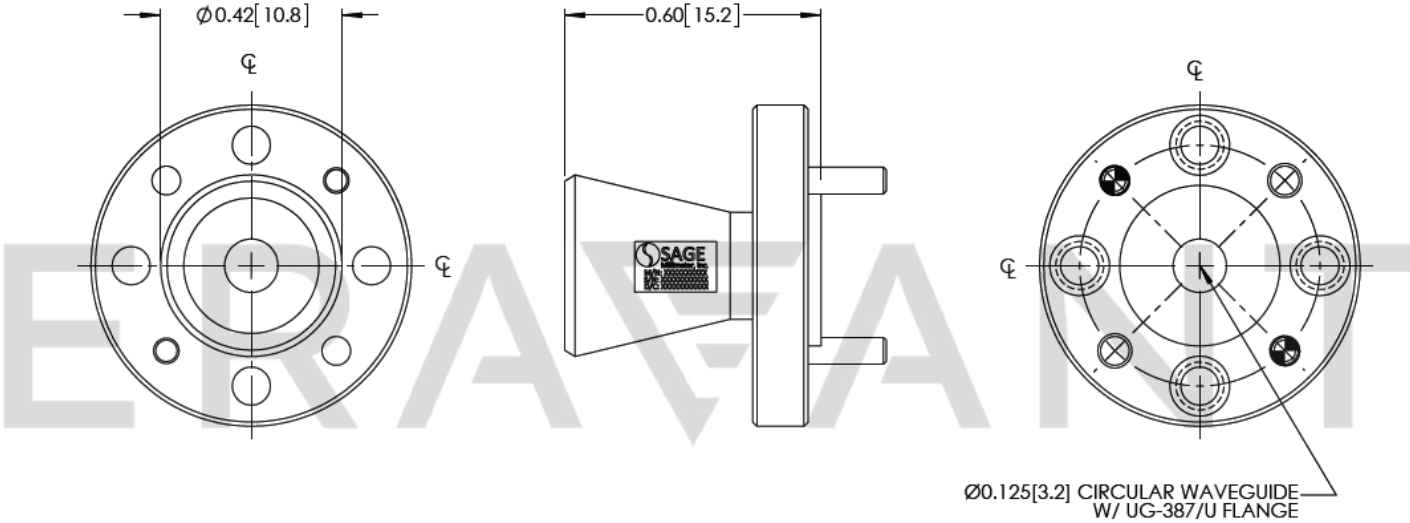

NOTE:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog here.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE