



U Band Conical Horn Antenna, 15 dBi Gain

Description:

Model SAC-1533-165-S2 is a U-band conical horn antenna that operates from 50 to 60 GHz. The antenna offers 15 dBi nominal gain and a typical half power beamwidth of 30 degrees on the E-plane and 36 degrees on the H-plane. The horn also offers typical sidelobes of -16 dB on the E-plane and -28 dB on the H-plane. The conical horn can support linear and circular polarization. The input of this antenna is a 0.165" diameter circular waveguide with UG-383/U-M anti-cocking flange.



Features:

- Circular Waveguide Interface
- Precisely Machined and Gold Plated
- High Return Loss
- Linear and Circular Polarization

Applications:

- Antenna Ranges
- Feed Horns
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency*	50 GHz		60 GHz
Gain		15 dBi	
3 dB Beamwidth, E-plane		30°	
3 dB Beamwidth, H-plane		36°	
Sidelobes, E-plane		-16 dB	
Sidelobes, H-plane		-28 dB	
Return Loss		23 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

*Note: Can operate from 46 to 60 GHz if the dominant mode is maintained.

Mechanical Specifications:


Item	Specification
Antenna Port	0.165" Diameter Circular Waveguide
Flange Type	UG-383/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	0.6 Oz
Size	0.80" (L) X 0.53" (Ø)
Outline	AC-CU15-165-A






U Band Conical Horn Antenna, 15 dBi Gain

Simulated Antenna Patterns @ 50 GHz

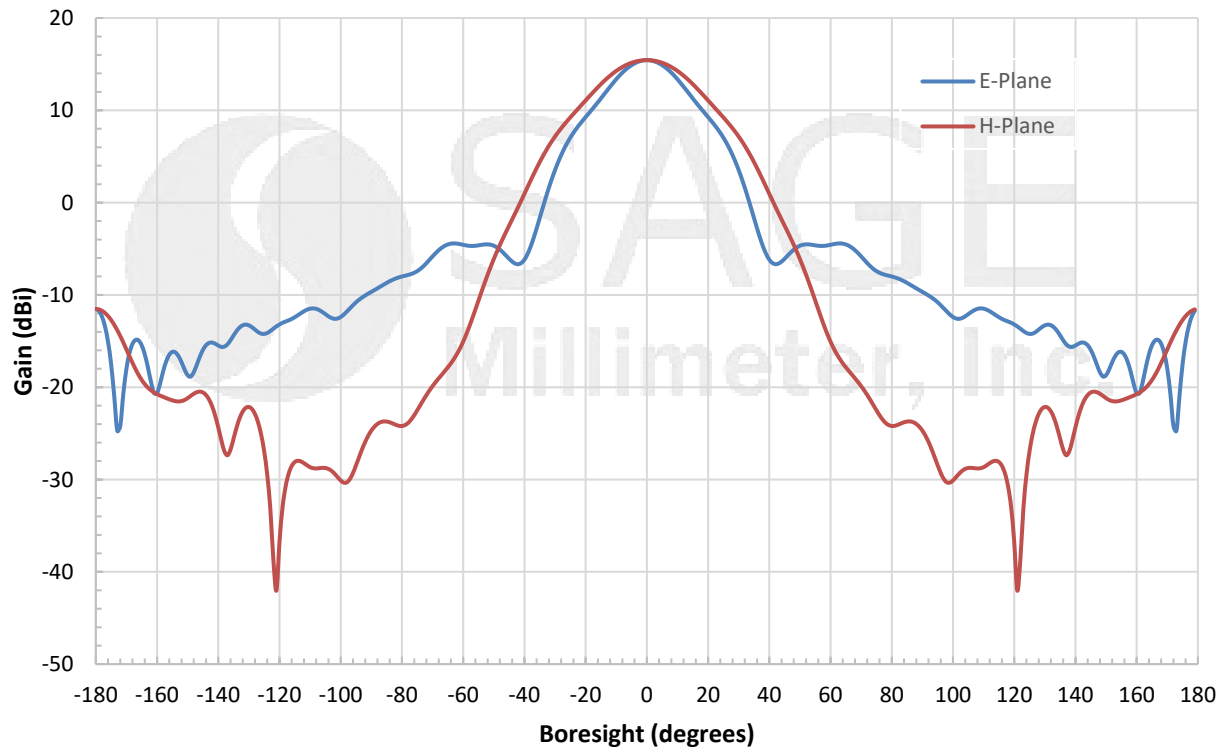


Simulated Antenna Patterns @ 55 GHz

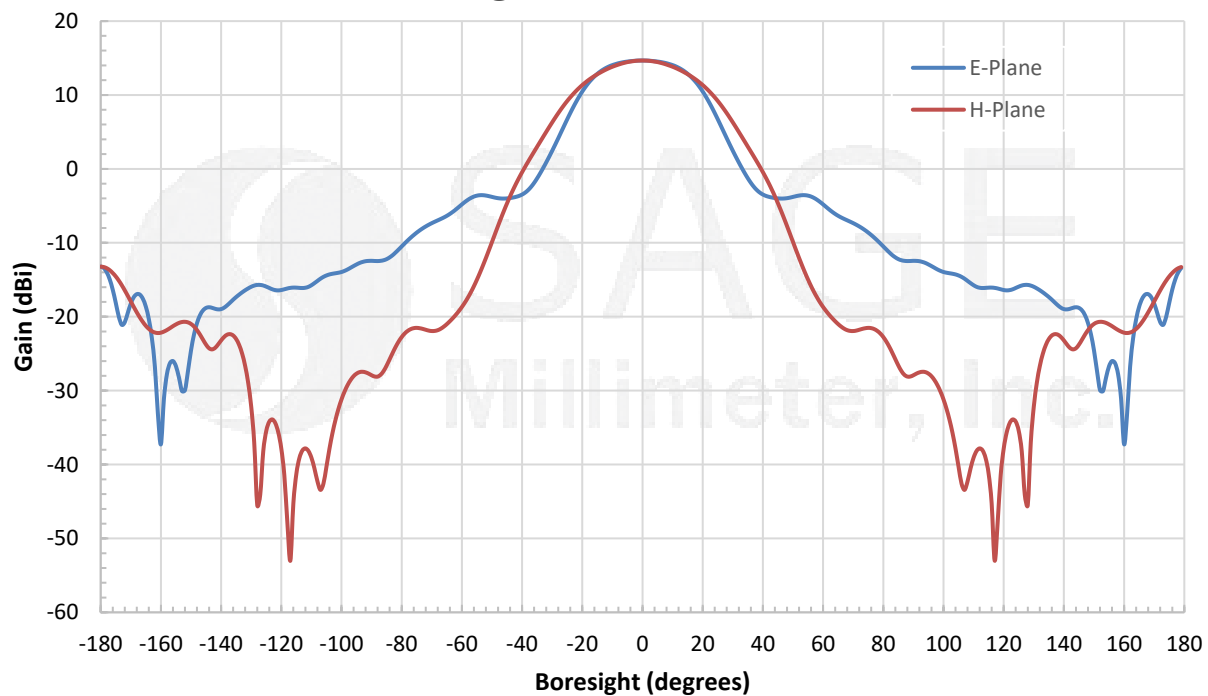




U Band Conical Horn Antenna, 15 dBi Gain

Simulated Antenna Patterns @ 60 GHz

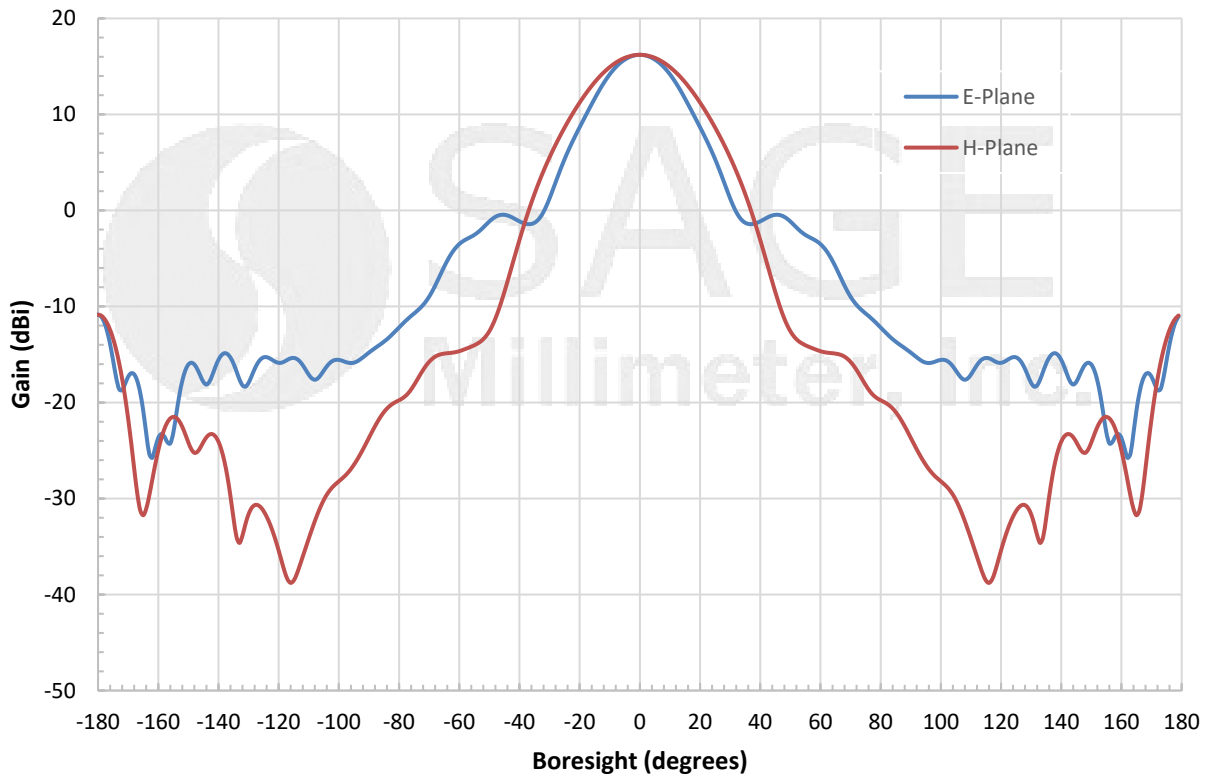


Simulated Return Loss vs. Frequency

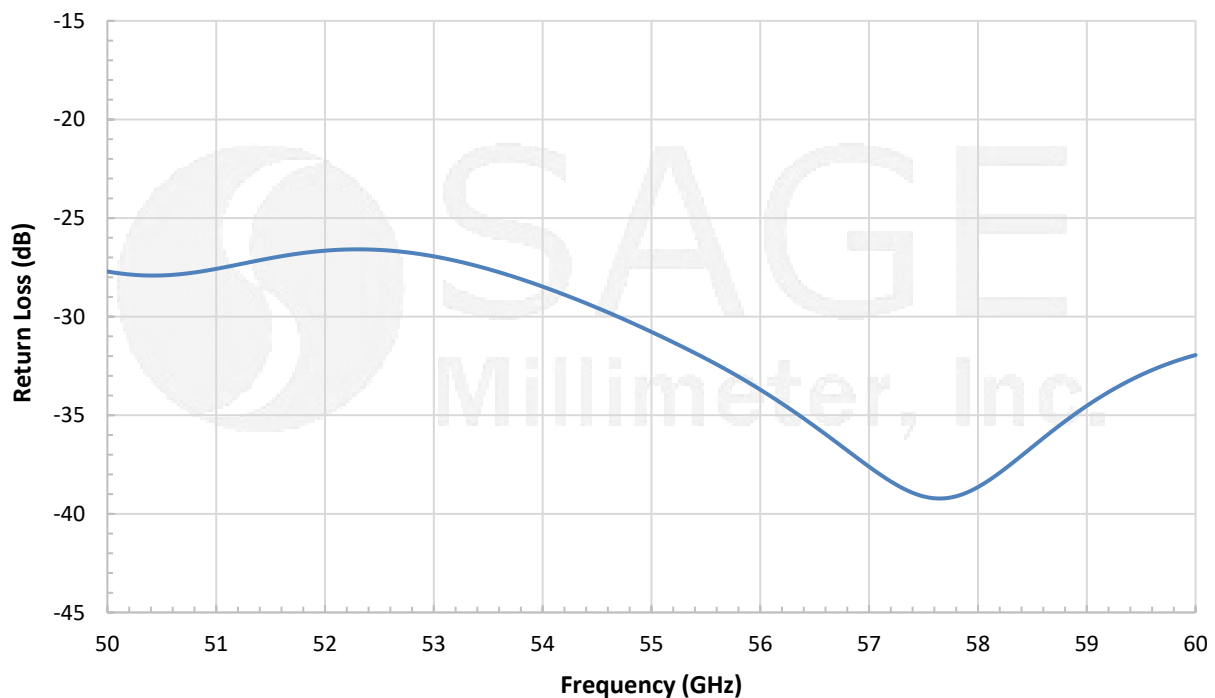




U Band Conical Horn Antenna, 15 dBi Gain

Simulated Gain vs. Frequency

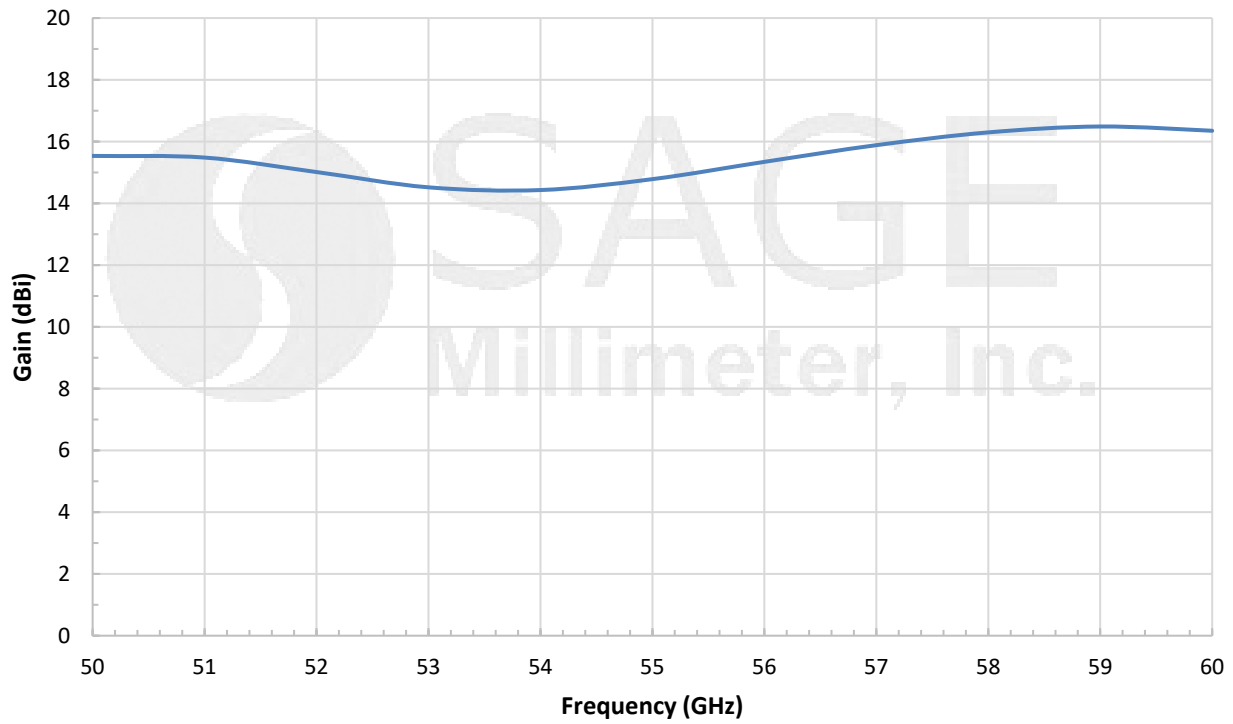

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

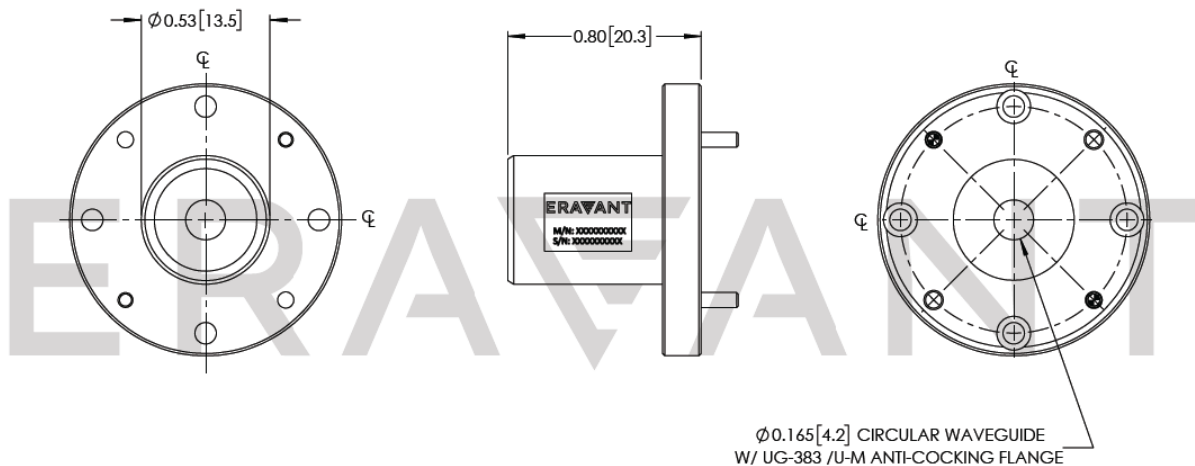

Note:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.



www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com