

SAC-2012-08-S2

F Band Conical Horn Antenna, 20 dBi Gain, WR-08 Waveguide

SAC-2012-08-S2 is an F-band conical horn antenna with a WR-08 rectangular waveguide interface that operates from 100 to 112 GHz. The antenna offers 20 dBi nominal gain and a typical half power beamwidth of 16 degrees on the E-plane and 20 degrees on the H-plane. The horn also offers typical sidelobes of -20 dB on the E-plane and -28 dB on the H-plane. The conical horn can support linear polarization. The RF connector of this antenna is a WR-08 waveguide with UG-387/U-M anti-cocking flange.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range*	100 GHz		112 GHz
Gain		20 dBi	
3 dB Beamwidth, E-Plane		16°	
3 dB Beamwidth, H-plane		20°	
Sidelobes, E-Plane		-20 dB	
Sidelobes, H-Plane		-28 dB	
Return Loss		23 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*Note: Can operate from 95 to 140 GHz if the dominant mode is maintained.

Mechanical Specifications:

Item	Specification
Antenna Port	WR-08 Waveguide
Flange type	UG-387/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	1.0 Oz
Size	1.00" (L) X 0.53" (Ø)
Outline	AC-RF1-082-A

ECCN

EAR99

FEATURES


- Rectangular Waveguide Interface
- Precisely Machines and Gold Plated
- High Return Loss
- Linear Polarization

APPLICATIONS


- Antenna Ranges
- Feed Horns
- System Setups




Simulated Antenna Patterns @ 100 GHz

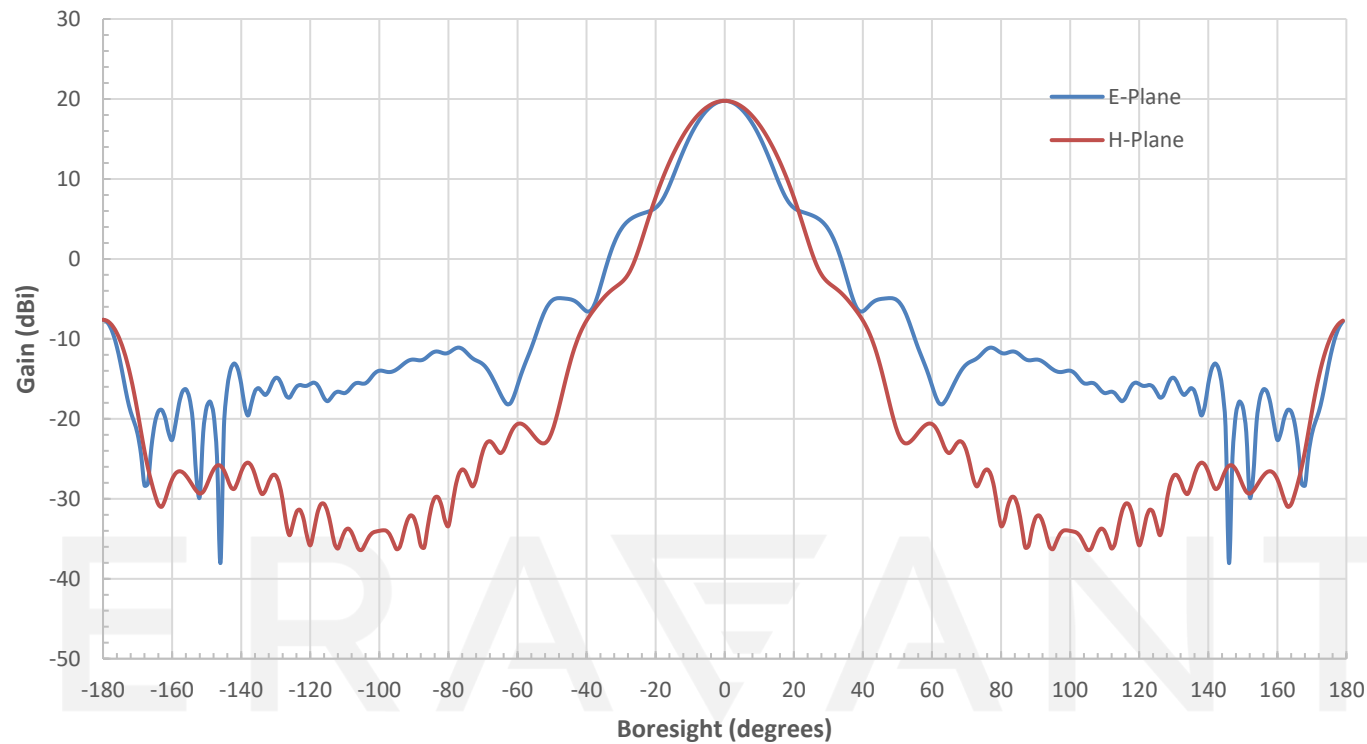


Simulated Antenna Patterns @ 106 GHz

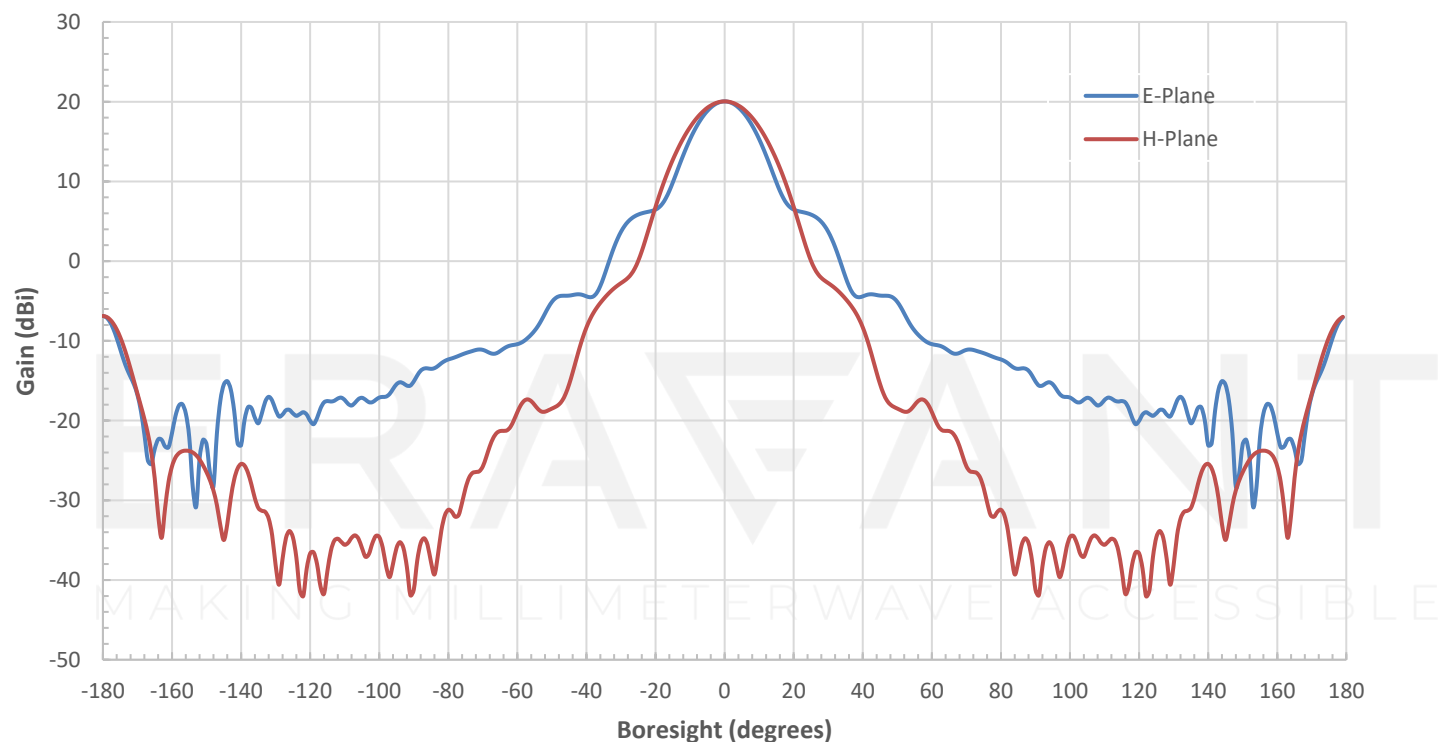


Simulated Antenna Patterns @ 112 GHz

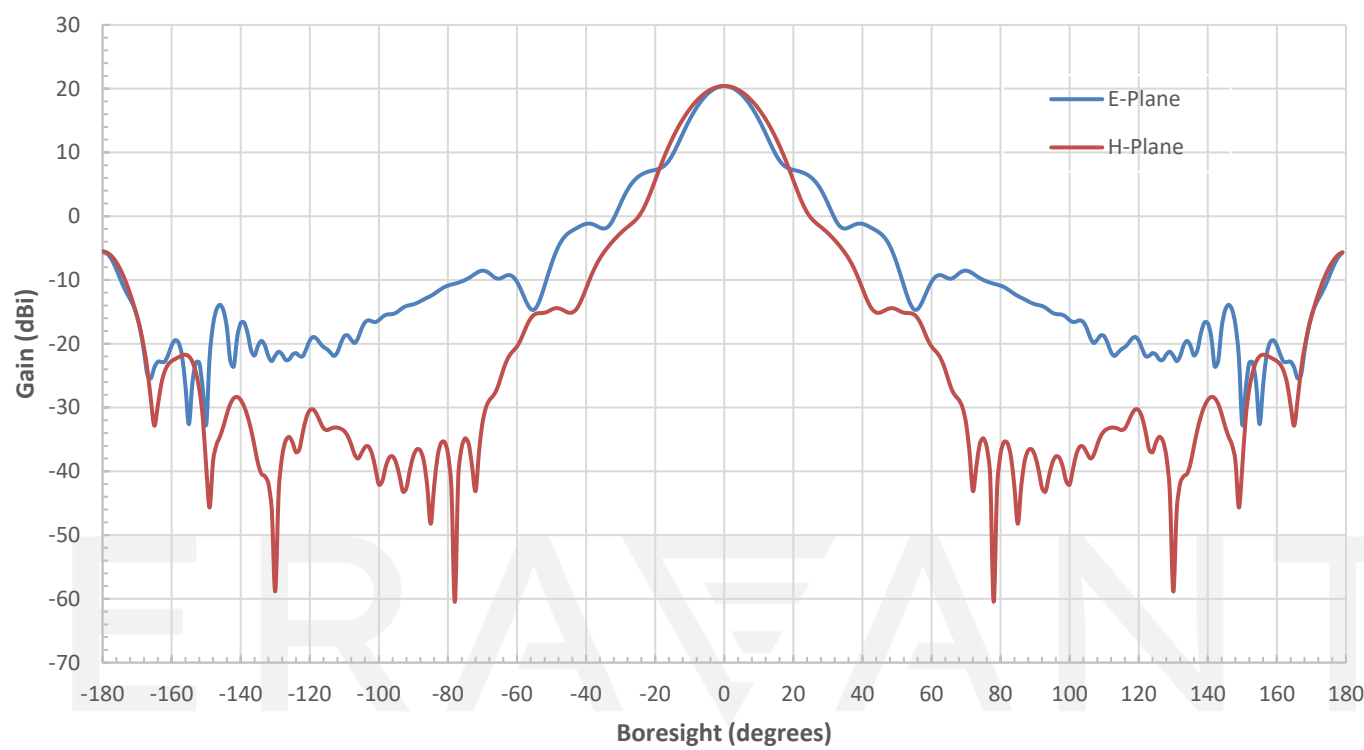

Simulated Return Loss vs. Frequency

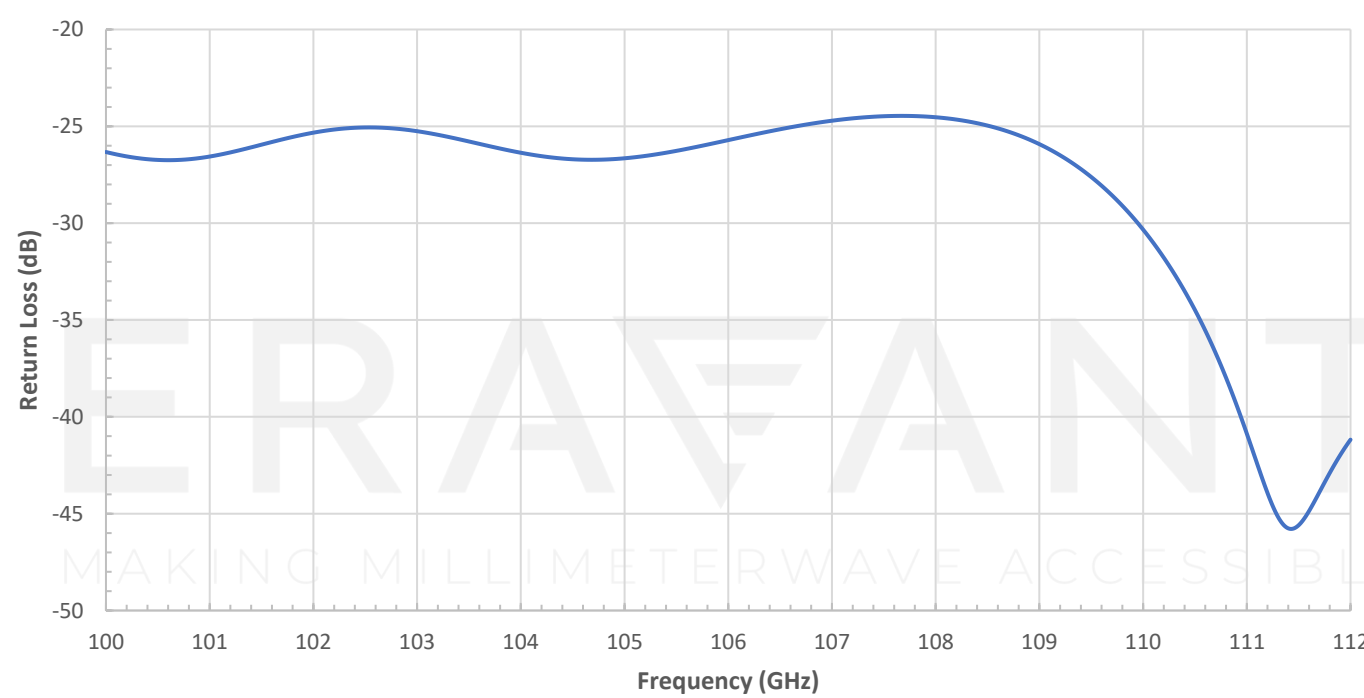


Simulated Gain vs. Frequency

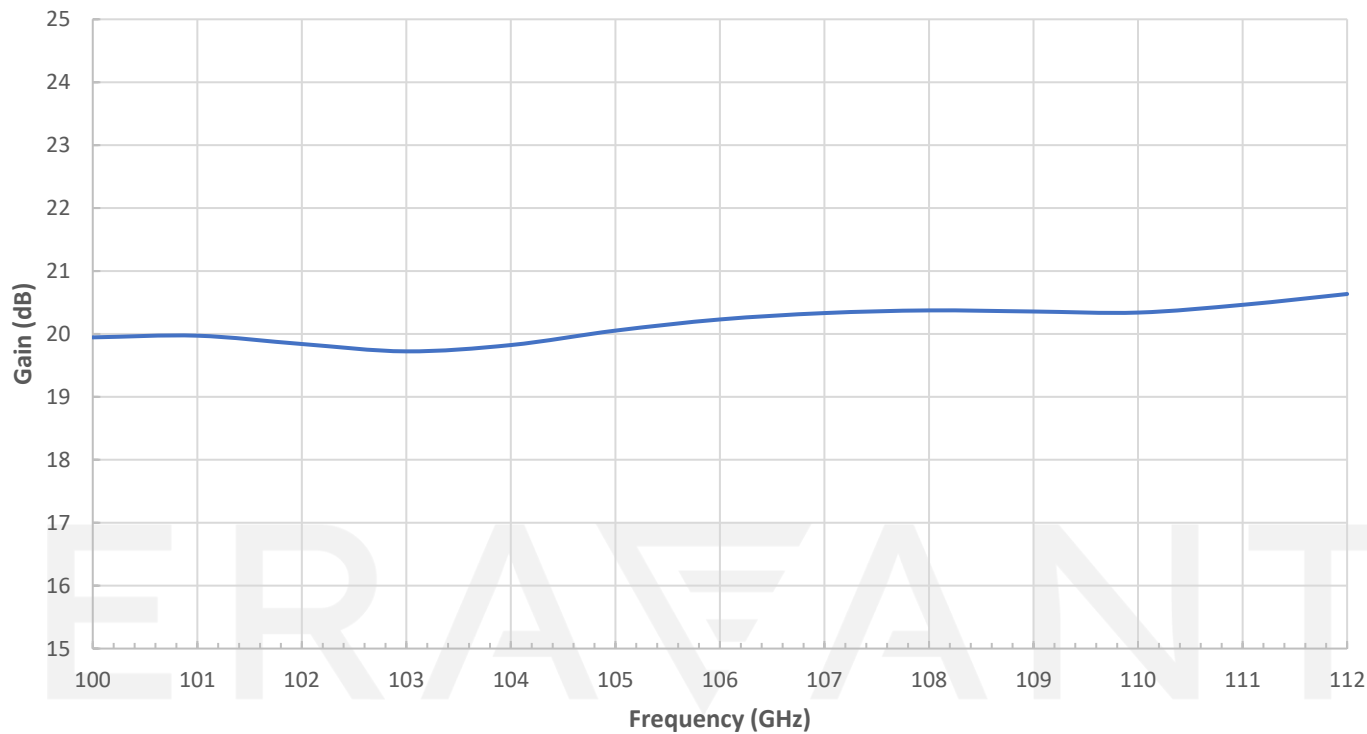

MAKING MILLIMETERWAVE ACCESSIBLE

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

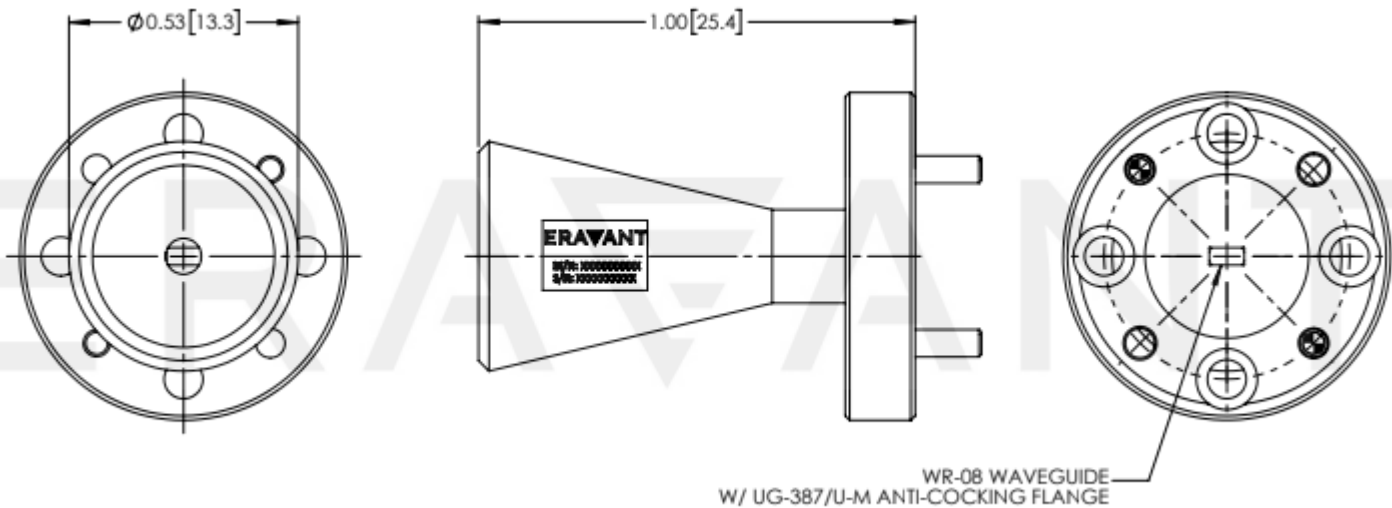

NOTE:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE