

V Band Conical Horn Antenna, 23 dBi Gain, WR-15 Waveguide

Description:

Model SAC-2309-15-S2-WP is a V-band conical horn antenna with a WR-15 rectangular waveguide interface that operates from 58 to 68 GHz. The antenna offers 23 dBi nominal gain and a typical half power beamwidth of 11 degrees on the E-plane and 13 degrees on the H-plane. The horn also offers typical sidelobes of -20 dB on the E-plane and -28 dB on the H-plane. The conical horn can support linear polarization. The RF connector of this antenna is a WR-15 waveguide with UG-385/U flange.



Features:

- Rectangular Waveguide Interface
- Precisely Machined and Gold Plated
- High Return Loss
- Linear Polarization

Applications:

- Antenna Ranges
- Feed Horns
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency*	58 GHz		68 GHz
Gain		23 dBi	
3 dB Beamwidth, E-plane		11°	
3 dB Beamwidth, H-plane		13°	
Sidelobes, E-plane		-20 dB	
Sidelobes, H-plane		-28 dB	
Return Loss		23 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

*Note: Can operate from 54 to 75 GHz if the dominant mode is maintained.

Mechanical Specifications:


Item	Specification
Antenna Port	WR-15 Waveguide
Flange Type	UG-385/U Flange
Material	Brass
Finish	Gold Plated
Weight	2.0 Oz
Size	2.60" (L) X 1.42" (Ø)
Outline	AC-RV2-141-WP






V Band Conical Horn Antenna, 23 dBi Gain, WR-15 Waveguide

Simulated Antenna Patterns @ 58 GHz

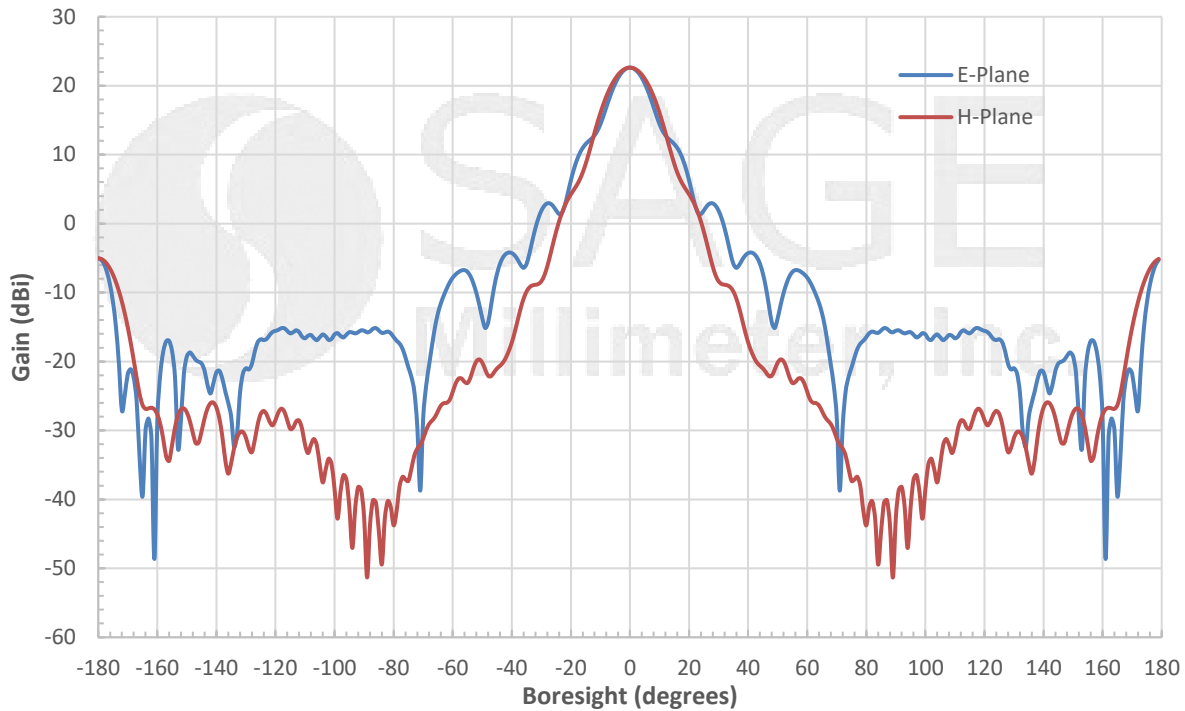


Simulated Antenna Patterns @ 63 GHz

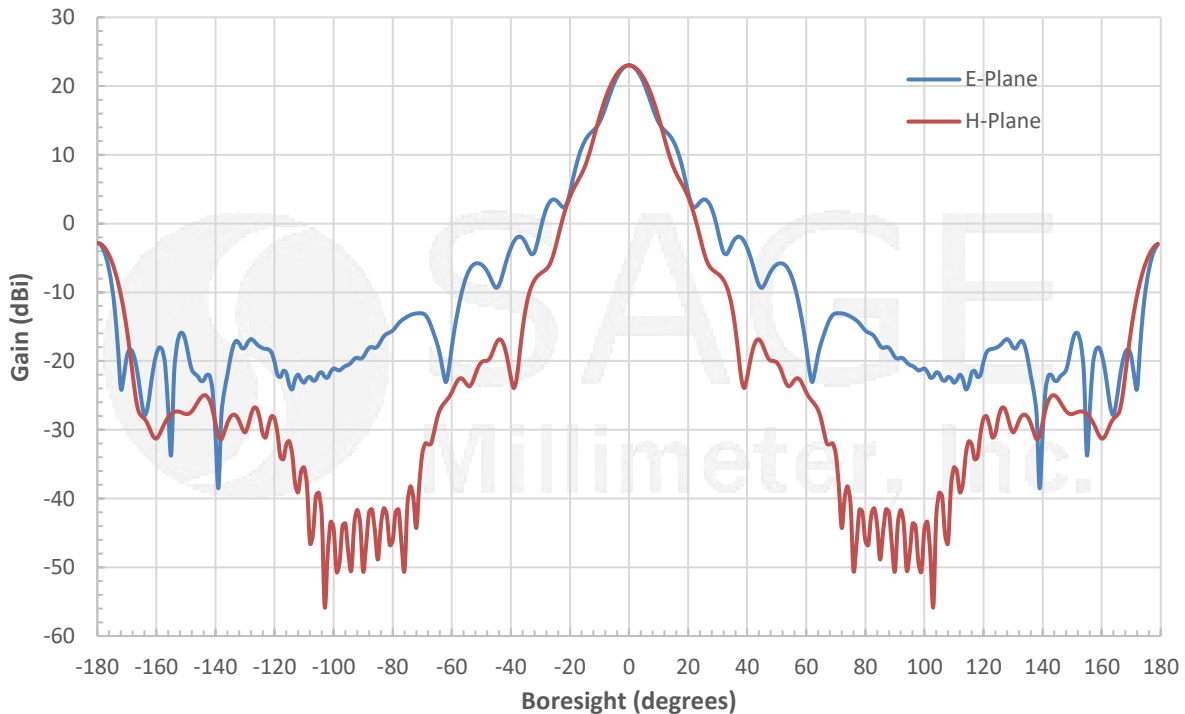


V Band Conical Horn Antenna, 23 dBi Gain, WR-15 Waveguide

Simulated Antenna Patterns @ 68 GHz

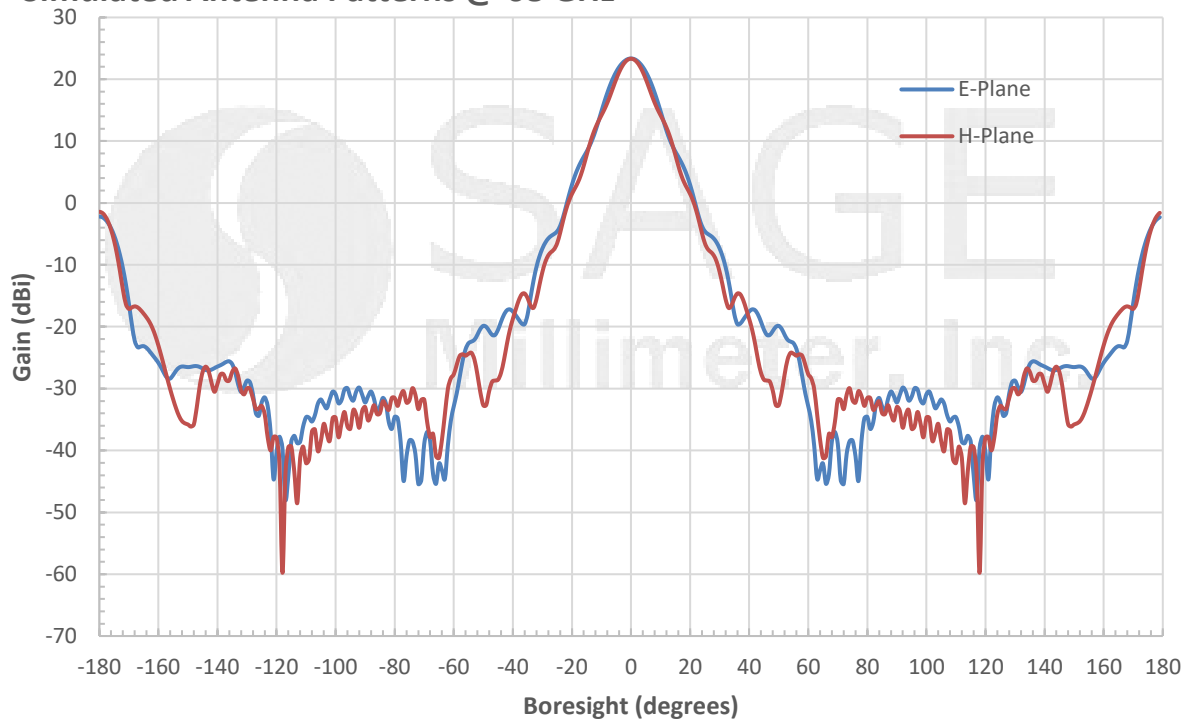


Simulated Gain vs. Frequency

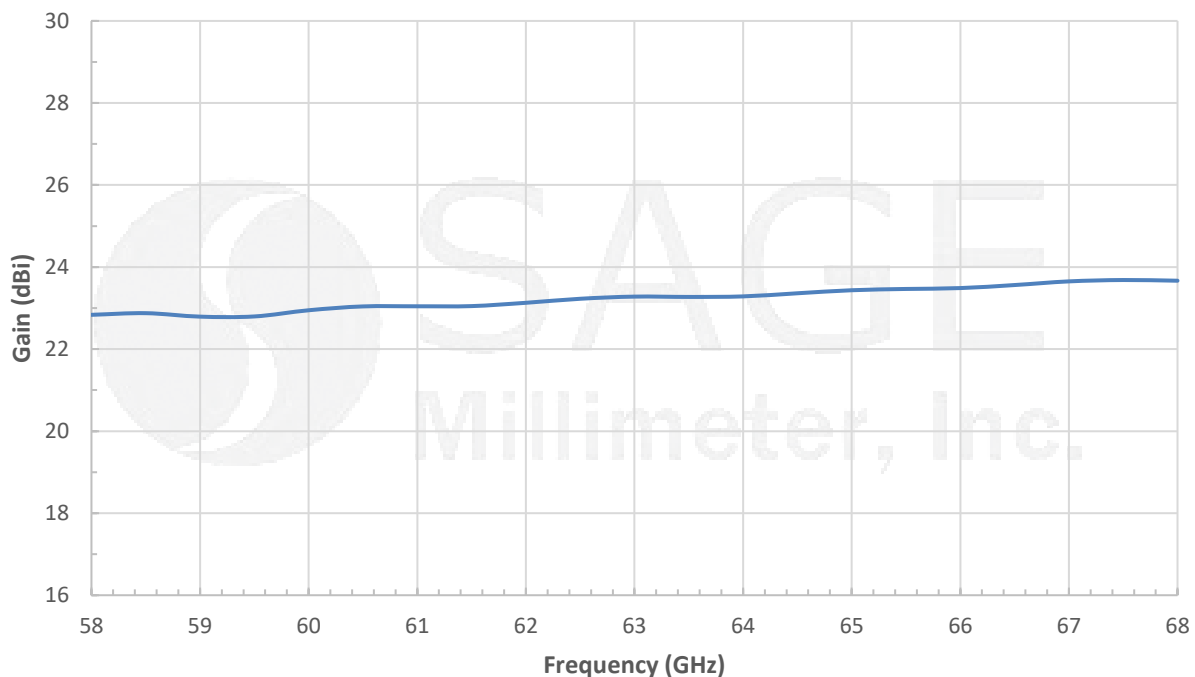

V Band Conical Horn Antenna, 23 dBi Gain, WR-15 Waveguide

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

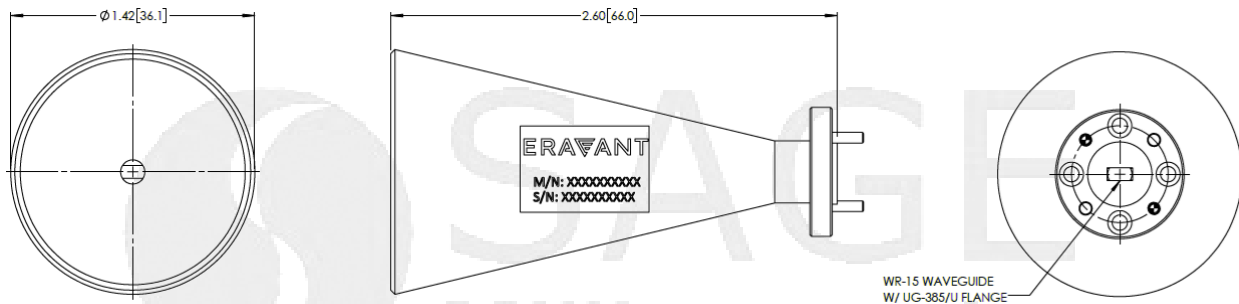

Note:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.

