



Ka Band Gaussian Optics Antenna, 12" Diameter, 25 to 30 GHz

Description:

Model SAG-2533033502-28-S1 is a 12" Ka-Band Gaussian antenna that operates from 25 to 30 GHz. The Gaussian antenna delivers a 35 dBi nominal gain and 2 degree half power beamwidth. The antenna supports linear polarized waveforms and employs a corrugated feed horn to offer excellent aperture efficiency, high cross polarization rejections, and low sidelobe levels. This model is equipped with a WR-28 waveguide and UG-599/U flange as its input port. By removing the mode transition, SAGE Millimeter model number **SWT-28315-SB**, the input port becomes an $\varnothing 0.315$ " circular waveguide, which can support both linear and circular polarized waveforms.



Features:

- Center Fed
- Low Sidelobes
- Low Cross Polarization

Applications:

- Radar Systems
- Communication Systems
- Plasma Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	25 GHz		30 GHz
Gain		35 dBi	
3 dB Beamwidth		2°	
Sidelobes		-25 dB	
Cross Polarization		-20 dB	
Polarization	Linear		
Return Loss		13 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Antenna Port	WR-28 Waveguide with UG-599/U Flange
Lens Diameter	12"
Housing Material	Aluminum
Housing Finish	Black Anodized
Weight	19.5 lbs
Size	13.00" (Ø) x 18.95" (L)
Outline	AG-RA35




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com




Ka Band Gaussian Optics Antenna, 12" Diameter, 25 to 30 GHz

Simulated H-Plane Antenna Pattern @ 27.5 GHz

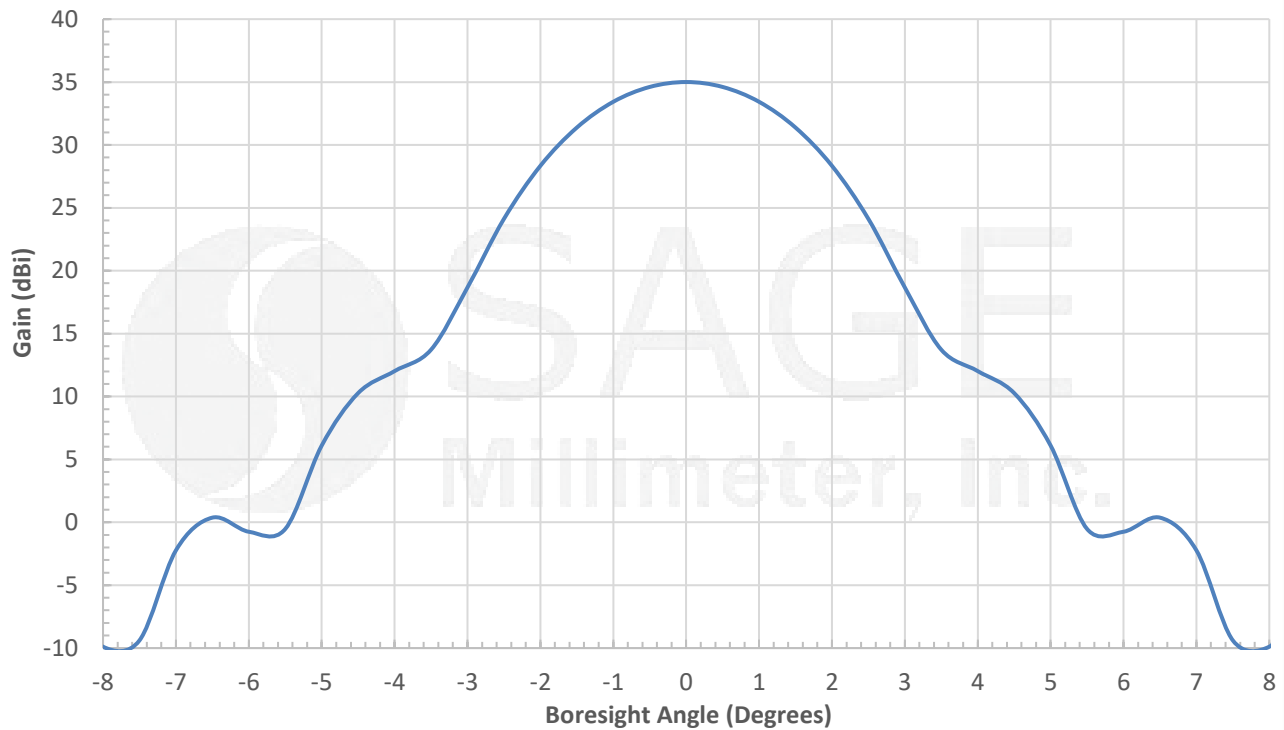


Simulated E-Plane Antenna Pattern @ 27.5 GHz

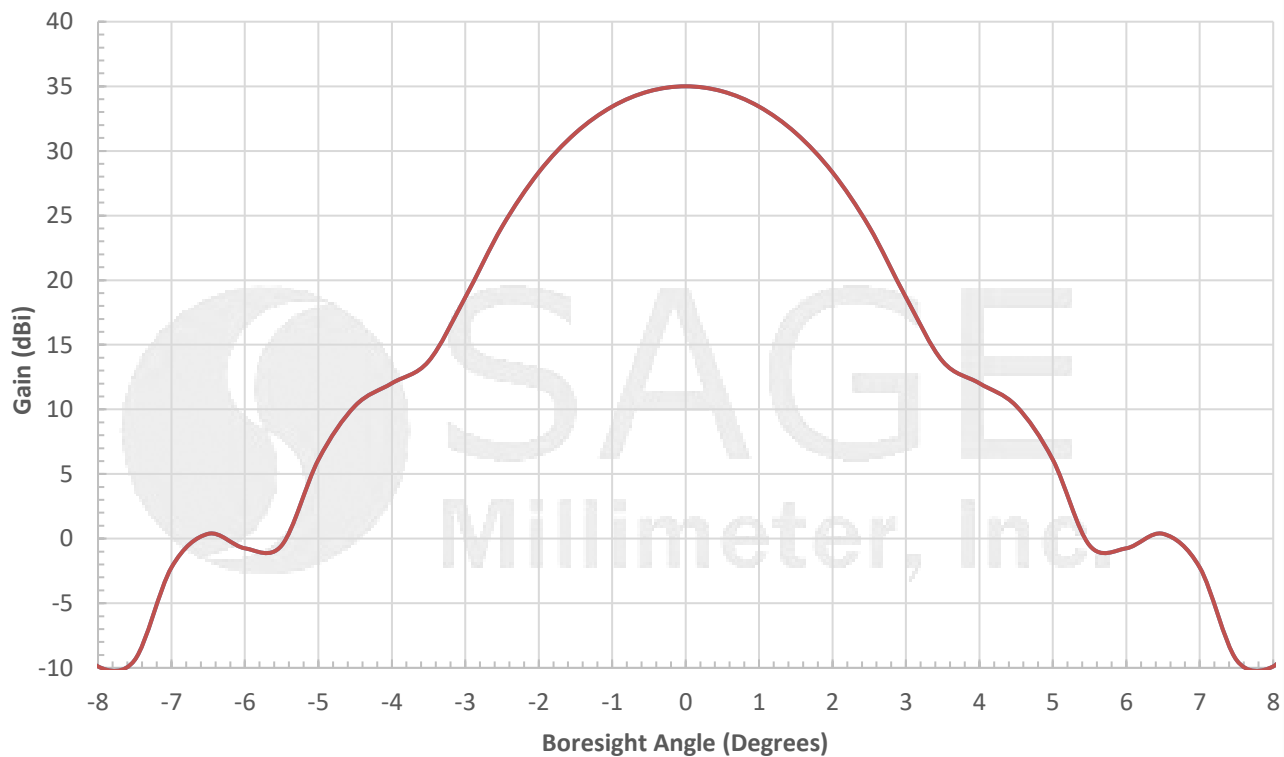




Ka Band Gaussian Optics Antenna, 12" Diameter, 25 to 30 GHz

Simulated Gain vs. Frequency

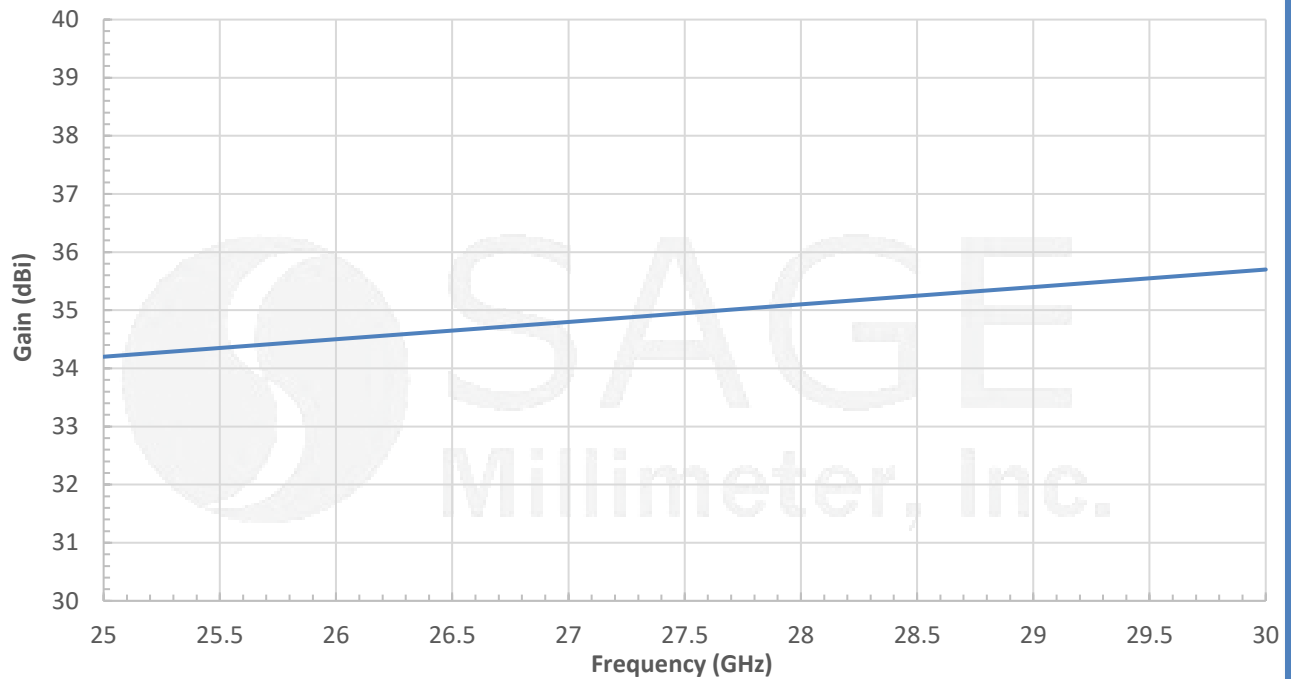

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

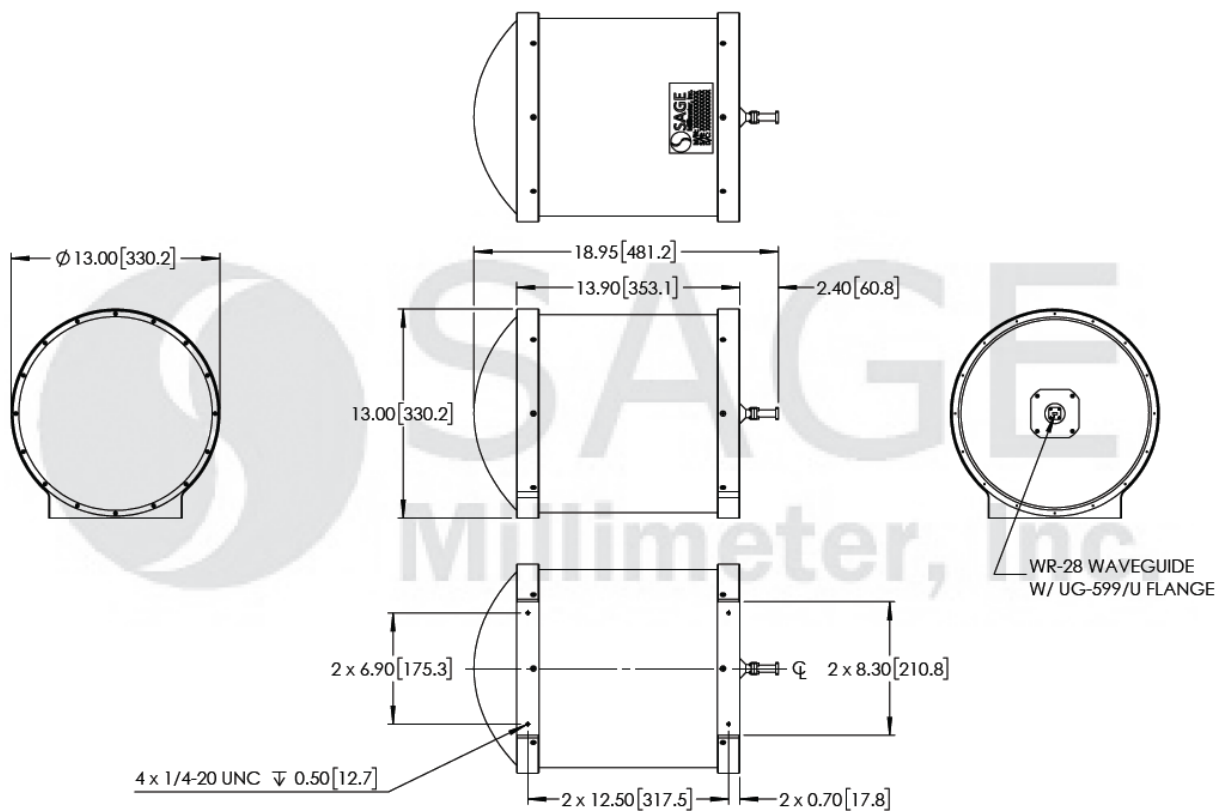

Ka Band Gaussian Optics Antenna, 12" Diameter, 25 to 30 GHz

Note:

- All data presented is simulated. Actual data may vary, slightly.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- The operation frequency of the antenna can be extended to a wider range with small performance degradation at the edges of the band.

Caution:

- Foreign objects in the waveguide will affect device performance and may damage the antenna.

