

SAQ-263079-28-S1

Ka-Band Spot-Focusing Lens Antenna, 26 GHz

SAQ-263079-28-S1 is a Ka-Band spot-focusing lens antenna that delivers a 3 dB spot size of 1.32" at the focal length of 7.87". The antenna employs a low loss lens to offer excellent aperture efficiency at 26 GHz. The spot-focusing lens antenna is equipped with a WR-28 waveguide with UG-599/U flange as its antenna port. It supports linear polarized waveforms.



Electrical Specifications:

Parameter		Minimum	Typical	Maximum
Frequency			26 GHz	
Frequency Bandwidth			±500 MHz	
Focal Length			7.87"	
Peak to First Null	Spot Size		3.18"	
	Power Captured		83.8%	
10 dB Below Peak	Spot Size		2.24"	
	Power Captured		78.9%	
3 dB Below Peak	Spot Size		1.32"	
	Power Captured		47.4%	
Polarization			Linear	
Return Loss			14 dB	
Specification Temperature			+25 °C	
Operating Temperature		-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Antenna Port	WR-28 Waveguide with UG-599/U Flange
Horn/Lens Material	Aluminum/HDPE
Finish	Chem Film
Weight	3.2 Oz
Lens Diameter	2.80"
Dimensions	3.00" (L) x 2.98" (Ø)
Outline	AQ-RA-2.8

ECCN

EAR99

FEATURES

- Rugged Mechanical Configurations
- High Efficiency and Low Loss

APPLICATIONS

- 5G Systems
- Scientific Instruments
- Material Research Instruments


SUPPLEMENTAL DETAILS



SAQ-263079-28-S1

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

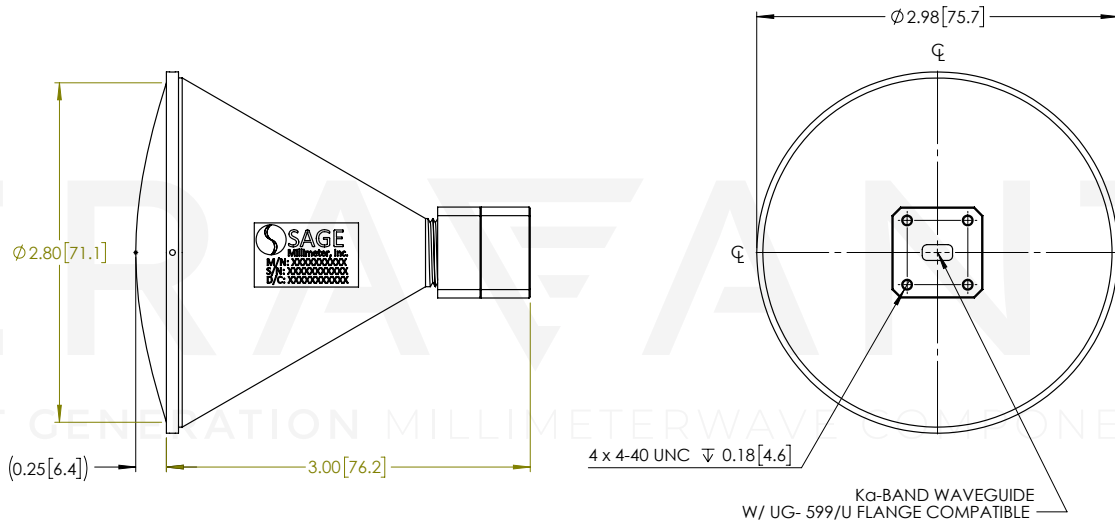

SPECIFICATIONS @ 26.00 GHz

	SPOT SIZE DIAMETER	POWER CAPTURED
To the First Null	3.18 in	83.8%
10 dB Below the Peak	2.24 in	78.9%
3 dB Below the Peak	1.32 in	47.4%

NOTE:


- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:


- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.

SAQ-263079-28-S1

Theoretical Spot Size vs. Frequency

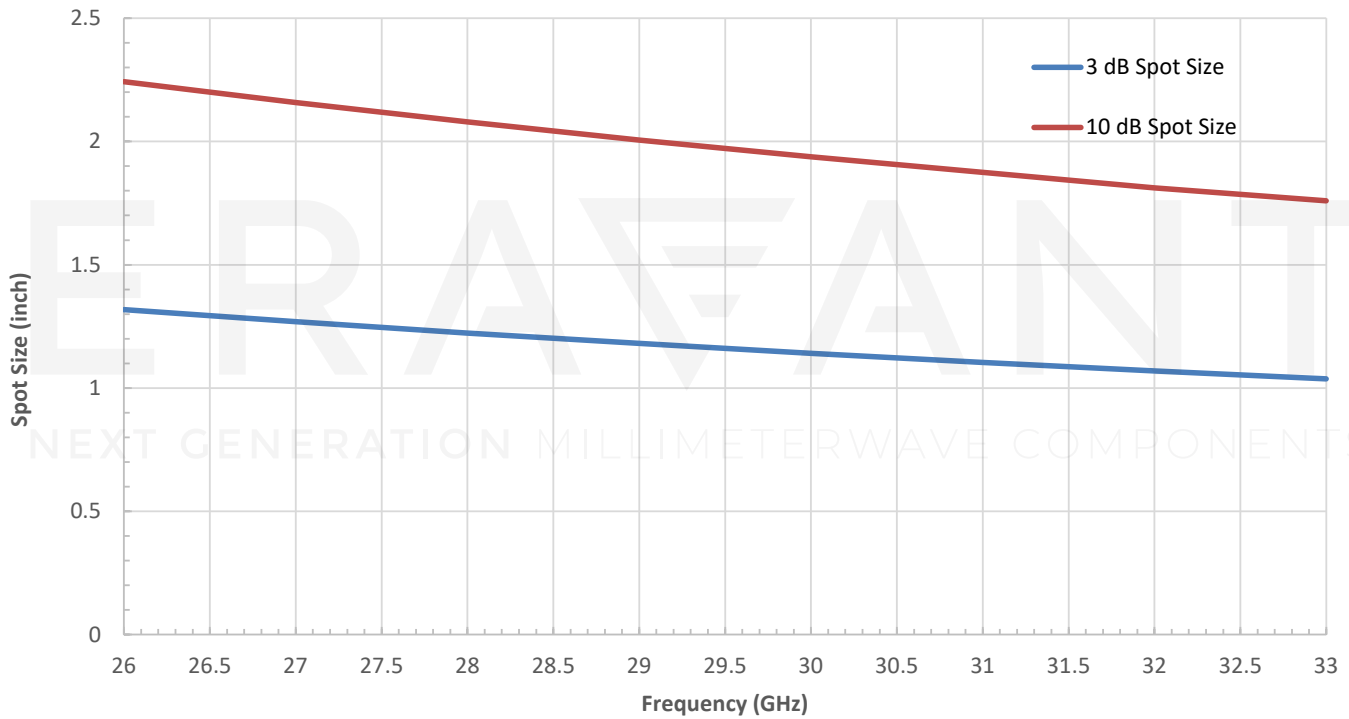


Typical Return Loss vs. Frequency

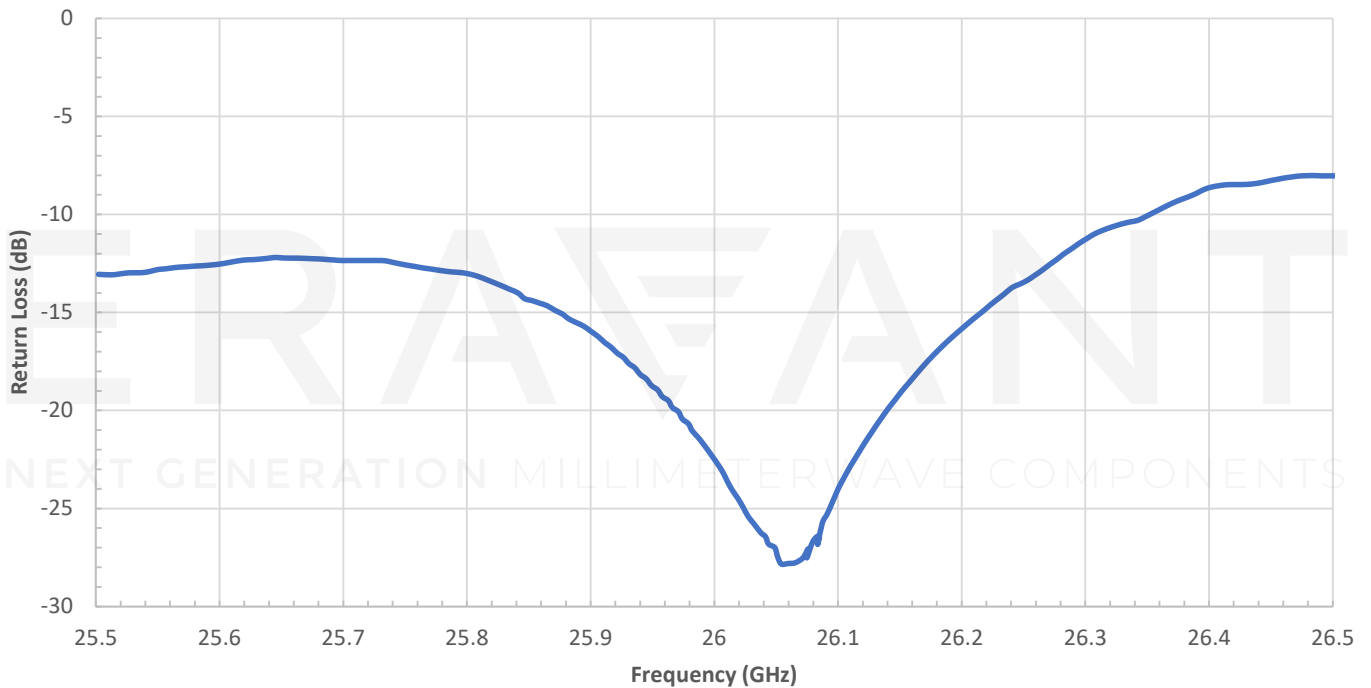

Focal Length Diagram:

Focal Length is defined in the diagram below with a pair of spot-focusing lens antennas

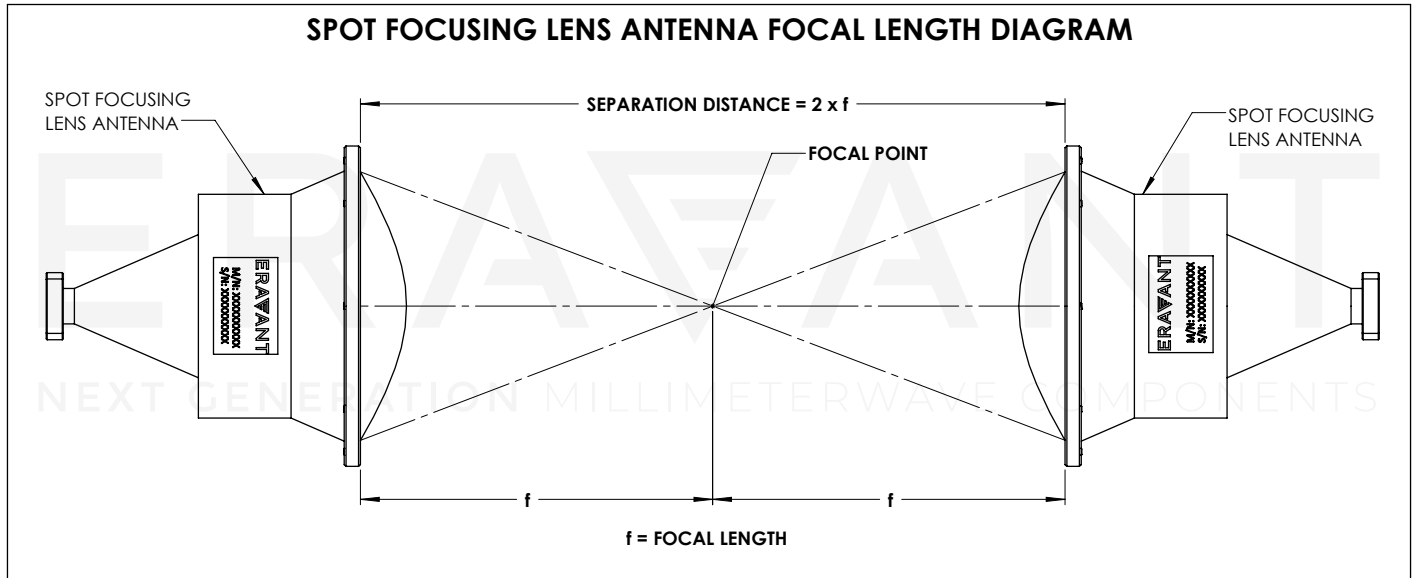

ERAVANT

NEXT GENERATION MILLIMETERWAVE COMPONENTS