

2.92 mm (M) to 2.92 mm (M) Coaxial Cable, Flexible, 9"

SCW-KMKM009-F2 is a 9" long, flexible, coaxial cable with 2.92 mm male connectors that cover the frequency range of DC to 40 GHz. The coaxial cable utilizes the highest quality test instrumentation grade cable and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.

**Electrical Specifications:**

| Parameter | Minimum | Typical | Maximum |
|---------------------------|---------|-------------|------------|
| Frequency Range | DC | | 40 GHz |
| Insertion Loss @ 18 GHz | | < 0.7 dB | |
| Insertion Loss @ 26.5 GHz | | < 0.9 dB | |
| Insertion Loss @ 32 GHz | | < 1.0 dB | |
| Insertion Loss @ 40 GHz | | < 1.2 dB | |
| Return Loss @ 40 GHz | | 19 dB | |
| Impedance | | 50 Ω | |
| Breakdown Voltage | | | 1000 Volts |
| Radiation Shielding | 90 dB | 100 dB | |
| Power Handling @ 40 GHz | | | 20 W (CW) |
| Specification Temperature | | +25 °C | |
| Operating Temperature | -40 °C | | +85 °C |

Mechanical Specifications:

| Item | Specification |
|----------------------------|--------------------------------------|
| Connectors | 2.92 mm Male |
| Connector Contact Material | Be-Cu / Gold Plating per MIL-G-45204 |
| Connector Material | Passivated Stainless Steel |
| Connector Dielectric | PEEK/PEI |
| Cable Dielectric | ePTFE |
| Cable Jacket Material | PFA |
| Cable Outer Diameter | 0.140" |
| Length | 9" |
| Minimum Bending Radius | 1" |
| Weight | 0.7 Oz |
| Outline | CW-KK-F10 |

ECCN

EAR99

FEATURES

- High Return Loss
- Low Insertion Loss
- Flexible and Durable


APPLICATIONS

- Test Lab
- Sub-assemblies


SUPPLEMENTAL DETAILS

SCW-KMKM009-F2

Typical Performance vs. Frequency

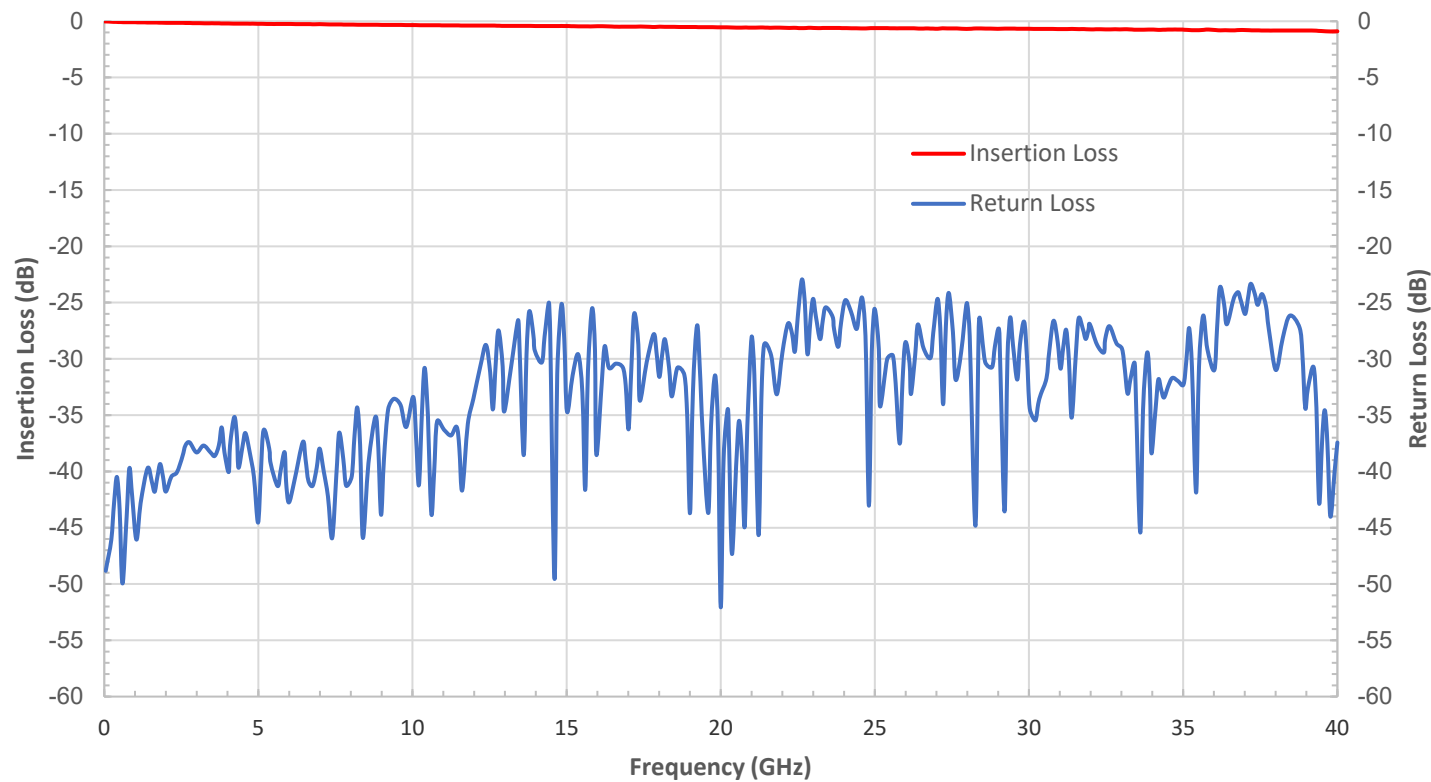

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

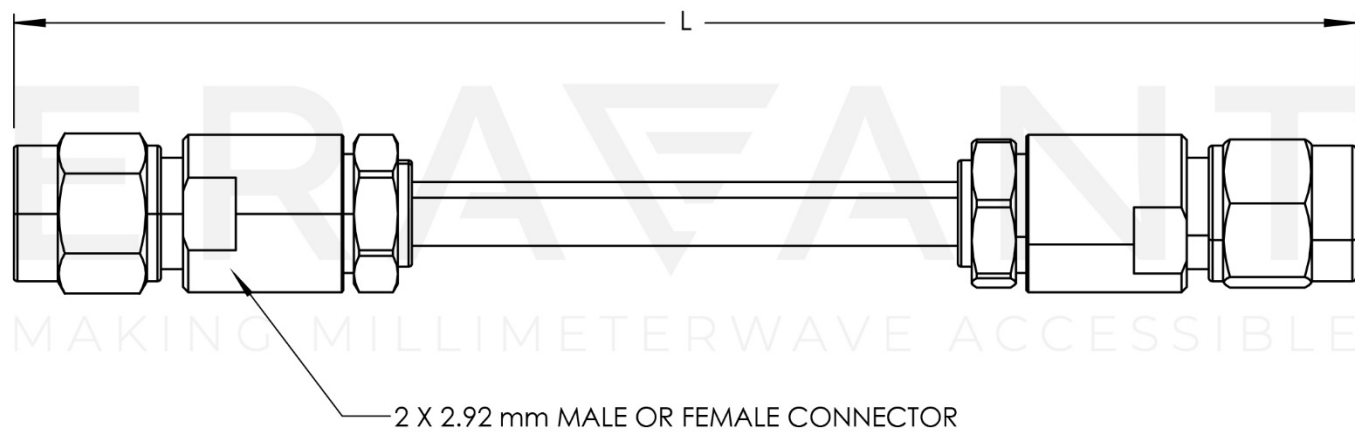

NOTE:

LENGTH "L" IS CUSTOMIZABLE

NOTE:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.

ERAVANT