

SAQ-333120-28-S1-GA

Ka-Band Spot-Focusing Lens Antenna, 12" [30.5 cm] Focal Length

SAQ-333120-28-S1-GA is a Ka-Band spot-focusing lens antenna with gaussian configuration that delivers a typical peak to first null spot size of 0.86" at the focal length of 12" (30.5 cm) and a typical return loss of 15 dB across the frequency range of 26.5 to 40.0 GHz. The gaussian configuration provides high efficiency and a rugged mechanical configuration. The spot-focusing lens antenna is equipped with a WR-28 waveguide with UG-599/U flange as its antenna port. It supports linear polarized waveforms.



Electrical Specifications:

Parameter		Minimum	Typical	Maximum
Frequency		26.5 GHz		40.0 GHz
Focal Length			12"	
Peak to First Null	Spot Size		0.86"	
	Power Captured		83%	
10 dB Below Peak	Spot Size		0.62"	
	Power Captured		78.9%	
3 dB Below Peak	Spot Size		0.37"	
	Power Captured		47%	
Polarization			Linear	
Return Loss			15 dB	
Specification Temperature			+25 °C	
Operating Temperature		-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Antenna Port	WR-28 Waveguide with UG-599/U Flange
Horn/Lens Material	Aluminum/HDPE
Finish	Black Anodized
Weight	22.3 lbs
Lens Diameter	12"
Outline	AQ-RA-12.0-GA

ECCN

EAR99

FEATURES

- Rugged Mechanical Configurations
- High Efficiency and Low Loss

APPLICATIONS

- Scientific Instruments
- Material Research Instruments


SUPPLEMENTAL DETAILS



SAQ-333120-28-S1-GA

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

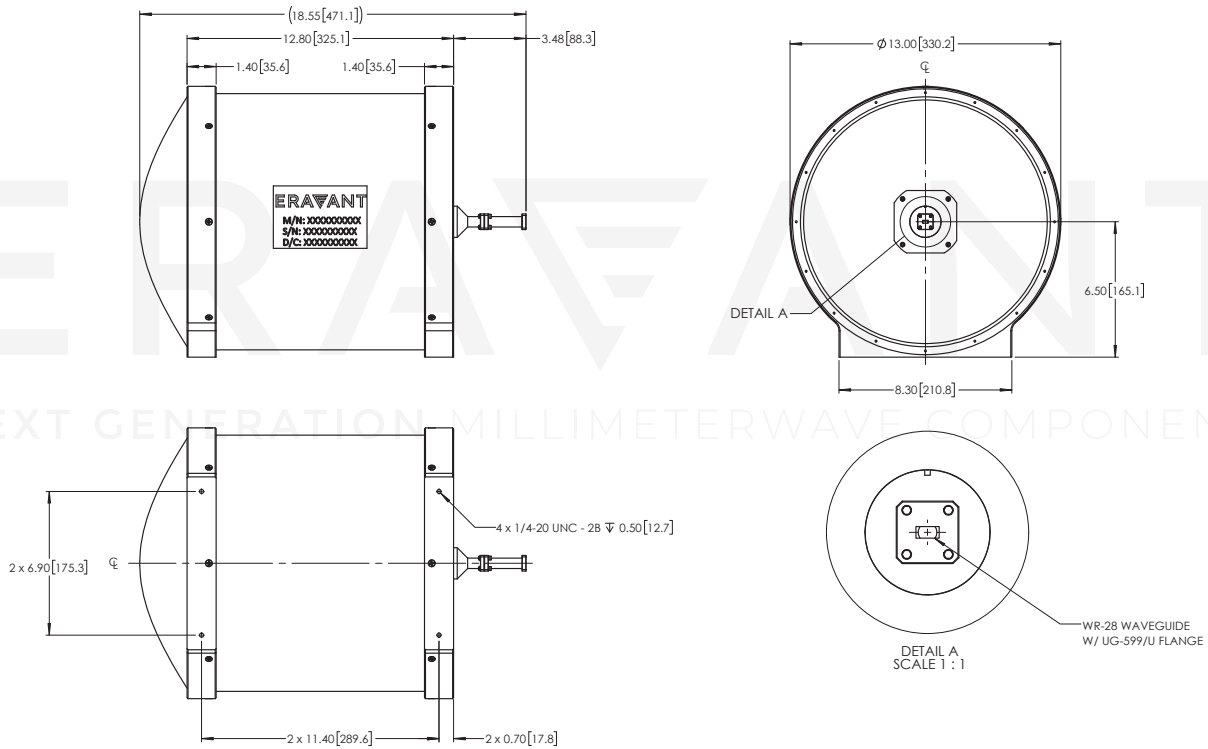

NOTE:


- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:


- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.

SAQ-333120-28-S1-GA

Theoretical Spot Size vs Frequency

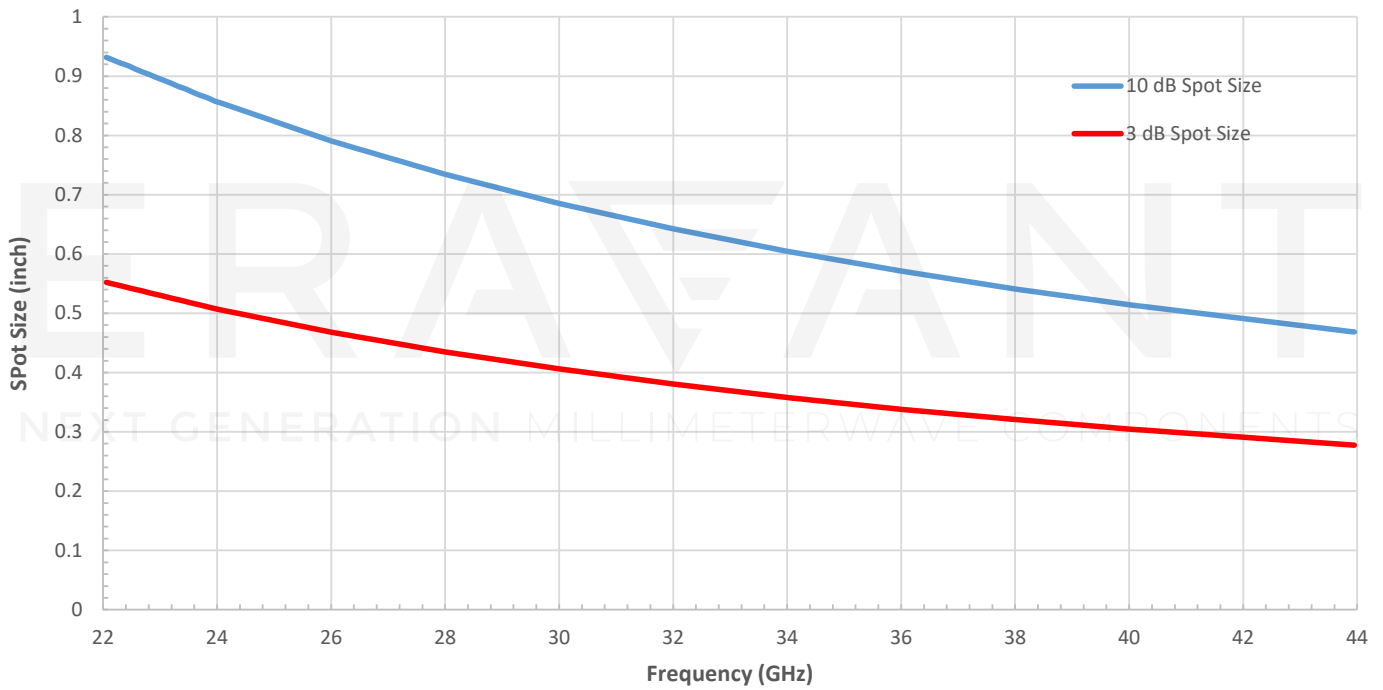


Typical Return Loss vs Frequency

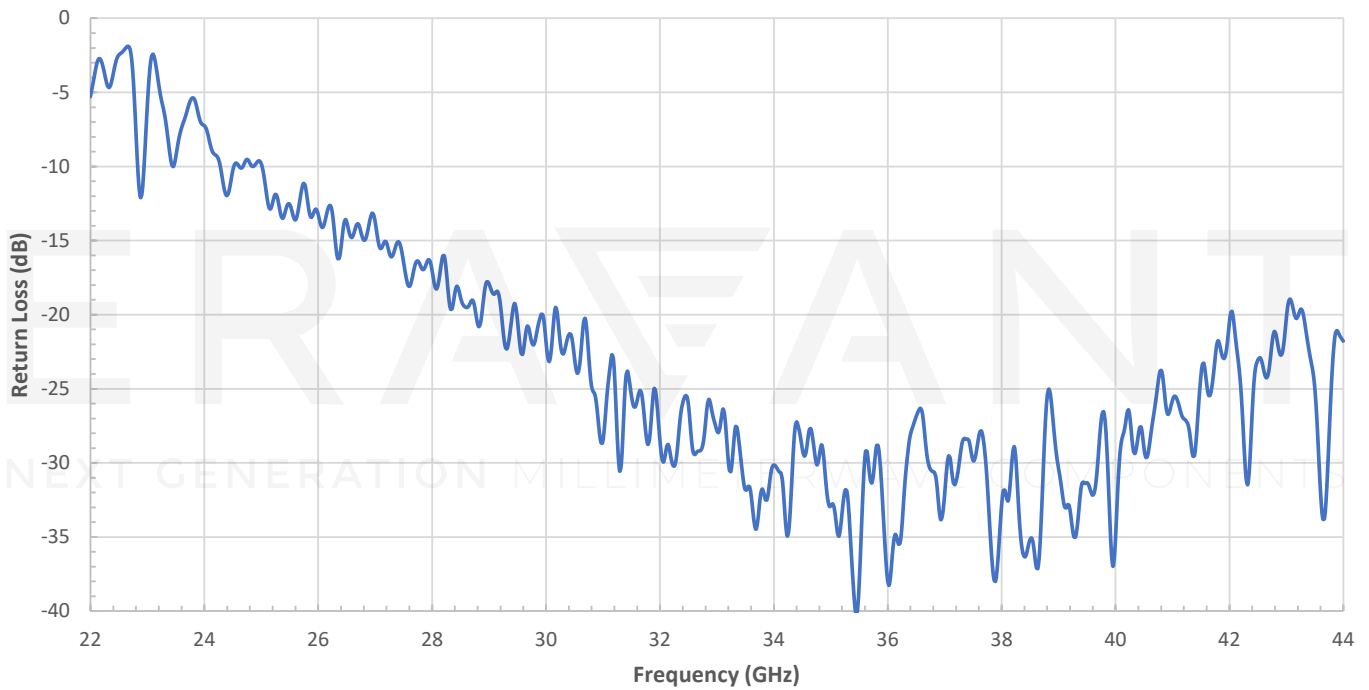

SAQ-333120-28-S1-GA

Focal Length Diagram:

Focal Length is defined in the diagram below with a pair of spot-focusing lens antennas

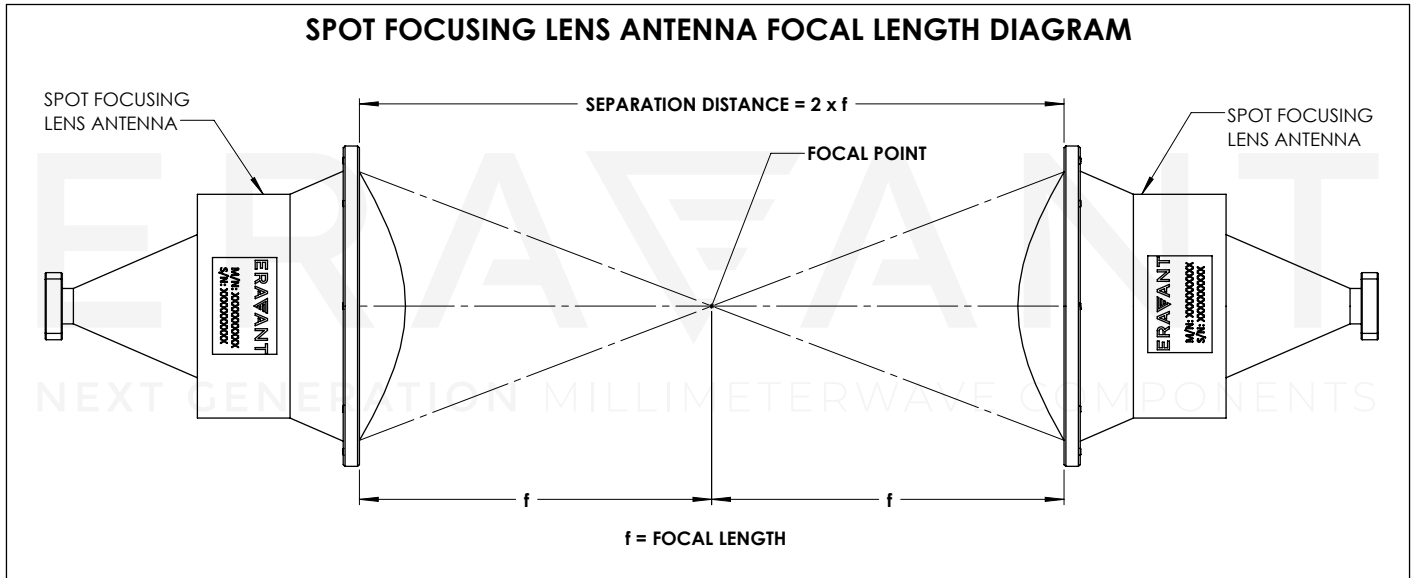

ERAVANT

NEXT GENERATION MILLIMETERWAVE COMPONENTS