

SAQ-813017-12-S1

E-Band Spot-Focusing Lens Antenna, 1.7" Focal Length

SAQ-813017-12-S1 is a E-Band spot-focusing lens antenna that delivers a typical 10 dB spot size of 0.2" at the focal length of 1.7" and a typical return loss of 15 dB across the frequency range of 76 to 86 GHz. The spot-focusing lens antenna is equipped with a WR-12 waveguide with UG-387/U flange as its antenna port. It supports linear polarized waveforms.



Electrical Specifications:

Parameter		Minimum	Typical	Maximum
Frequency		76 GHz		86 GHz
Focal Length			1.7"	
Peak to First Null	Spot Size		0.28"	
	Power Captured		83%	
10 dB Below Peak	Spot Size		0.20"	
	Power Captured		78.9%	
3 dB Below Peak	Spot Size		0.13"	
	Power Captured		47%	
Polarization			Linear	
Return Loss			15 dB	
Specification Temperature			+25 °C	
Operating Temperature		-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Antenna Port	WR-12 Waveguide with UG-387/U Flange
Horn/Lens Material	Aluminum/HDPE
Finish	Gold Plated
Weight	3.5 Oz
Lens Diameter	2.0"
Dimensions	4.38" (L) x 2.52" (Ø)
Outline	AQ-RE-2.0-C110

ECCN

EAR99

FEATURES

- Rugged Mechanical Configurations
- High Efficiency and Low Loss

APPLICATIONS

- Scientific Instruments
- Material Research Instruments


SUPPLEMENTAL DETAILS



SAQ-813017-12-S1

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

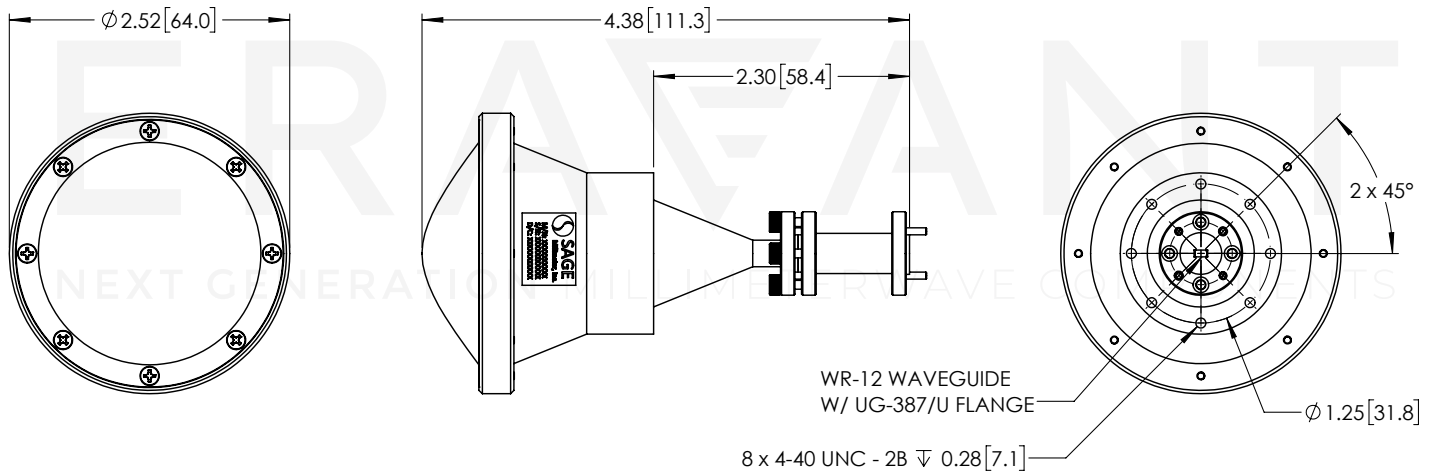


NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.


CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- For 1 mm connectors proper torque should be applied: 4.0 \pm 0.15 inch-pounds (0.45 \pm 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 \pm 0.15 inch-pounds (0.90 \pm 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.

Theoretical Spot Size vs. Frequency

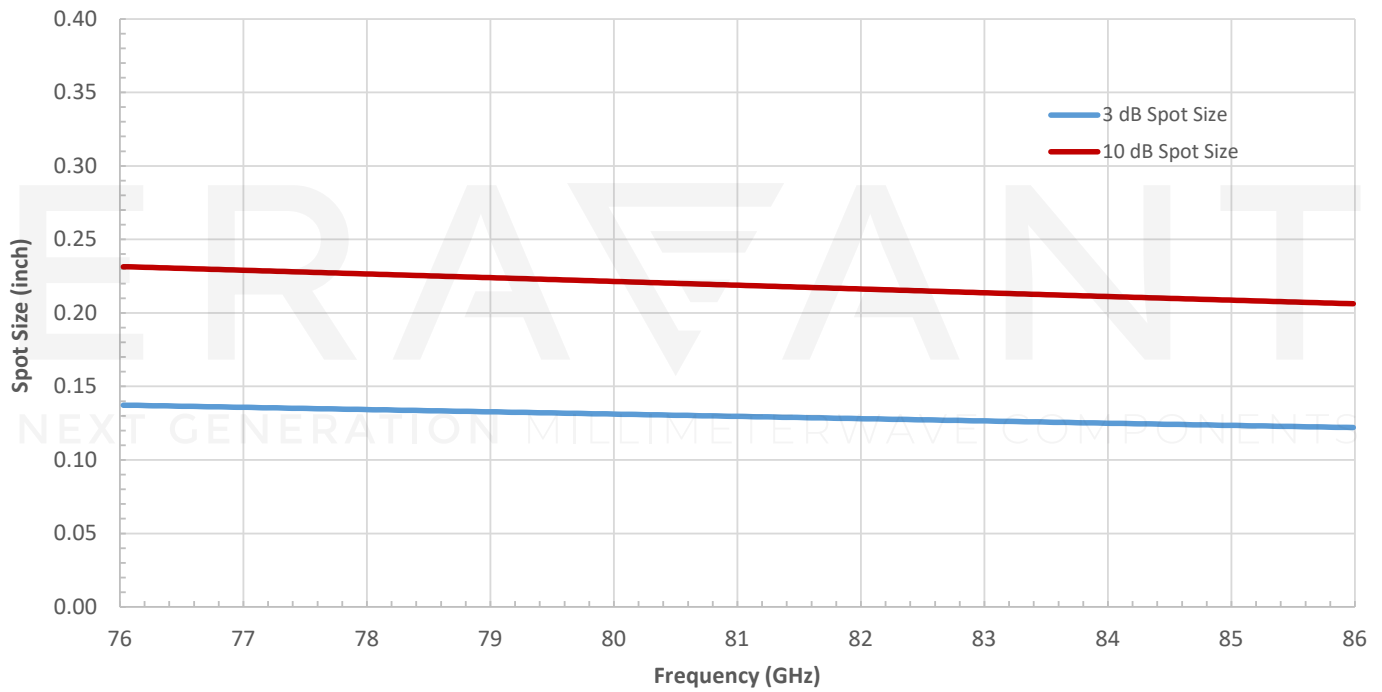


Typical Return Loss vs Frequency

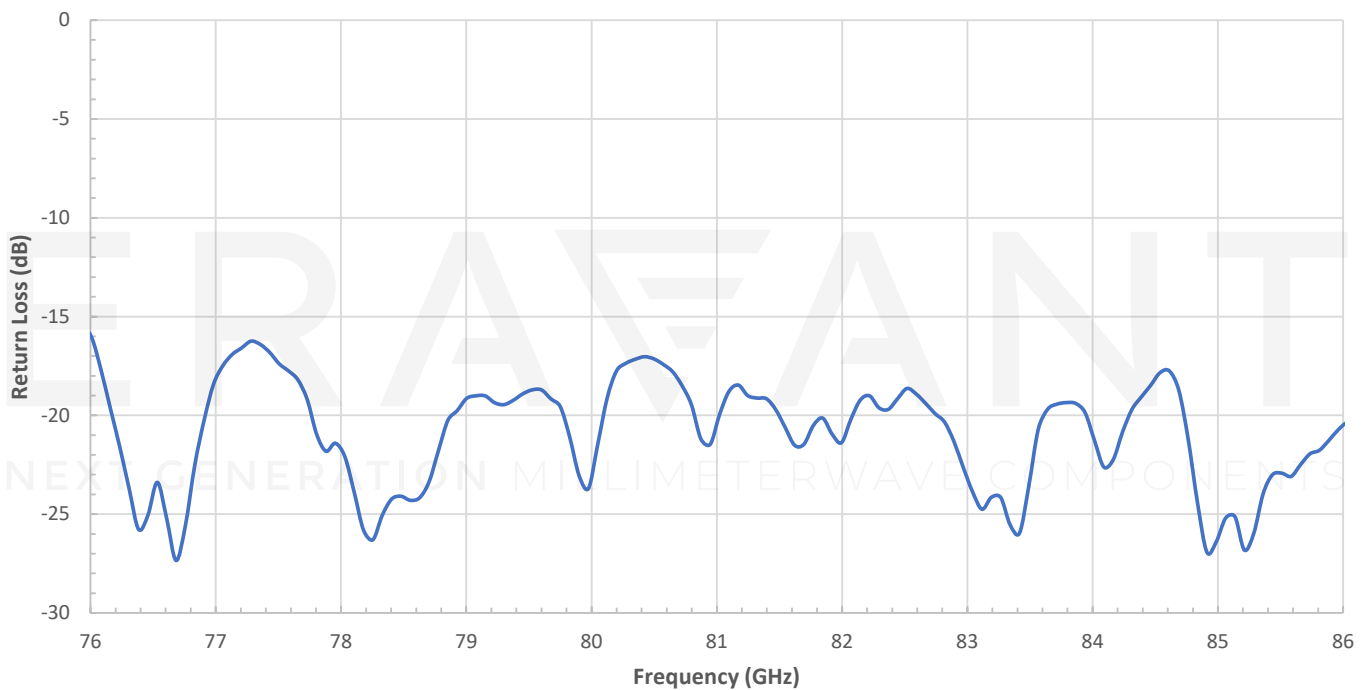

Focal Length Diagram:

Focal Length is defined in the diagram below with a pair of spot-focusing lens antennas

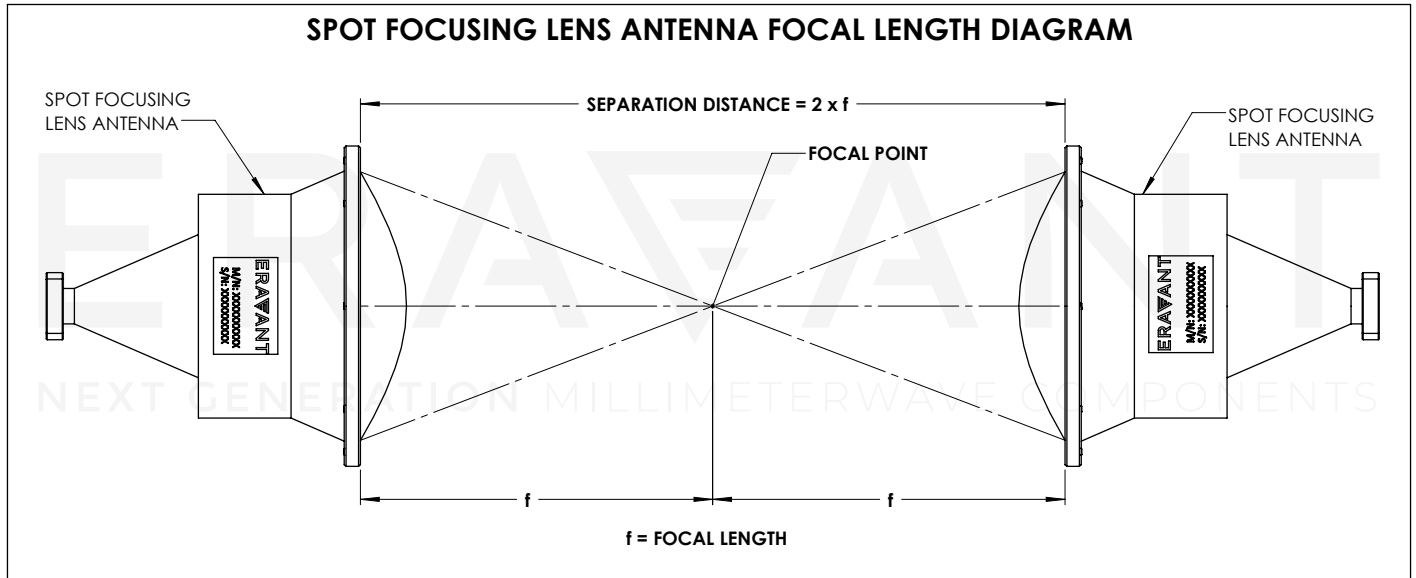

ERAVANT

NEXT GENERATION MILLIMETERWAVE COMPONENTS