

SAR-1725-15-S2

WR-15 Pyramidal Horn Antenna, 17 dBi Gain

SAR-1725-15-S2 is a V-band pyramidal horn antenna that operates from 50 GHz to 75 GHz. The antenna offers 15 dBi nominal gain and a typical half power beamwidth of 26 degrees on the E-plane and 25 degrees on the H-plane. The antenna supports linear polarized waveforms. The input of this antenna is a WR-15 waveguide with UG-385/U flange.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	50 GHz		75 GHz
Gain		17 dBi	
Polarization		Linear	
3 dB Beamwidth, E-Plane		26°	
3 dB Beamwidth, H-Plane		25°	
Sidelobes, E-Plane		-13 dB	
Sidelobes, H-Plane		-36 dB	
Return Loss		23 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Antenna Port	WR-15 Waveguide
Flange Type	UG-385/U Flange
Material	Brass
Finish	Gold Plated
Weight	0.6 Oz
Size	1.00" (L) X 0.59" (W) X 0.47"(H)
Outline	AR-V17

ECCN

EAR99

FEATURES

- Rectangular Waveguide Interface
- Precisely Machined and Gold Plated
- Linear Polarization
- High Return Loss

APPLICATIONS


- Antenna Ranges
- Antenna Gain Measurements
- System Setups

SUPPLEMENTAL DETAILS




SAR-1725-15-S2

Simulated Antenna Patterns @ 50 GHz

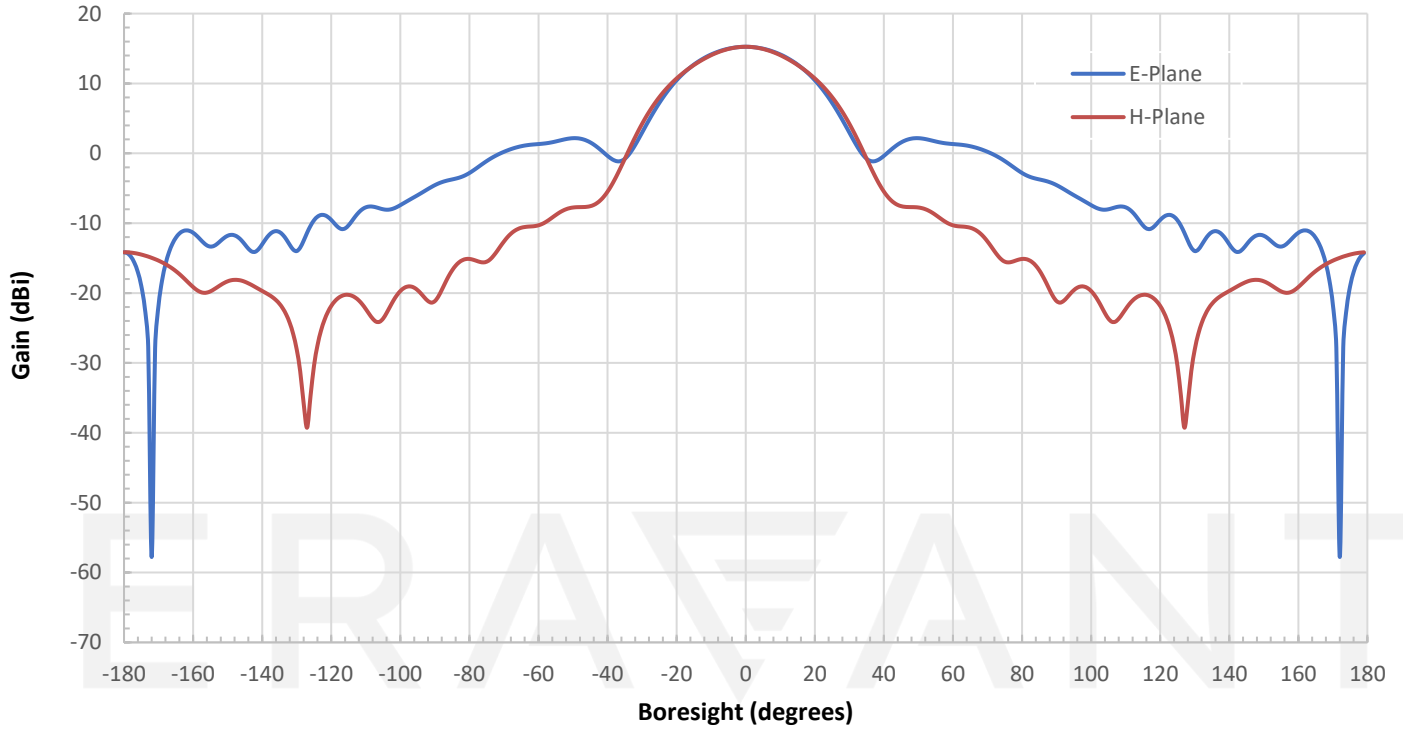


Simulated Antenna Patterns @ 62.5 GHz

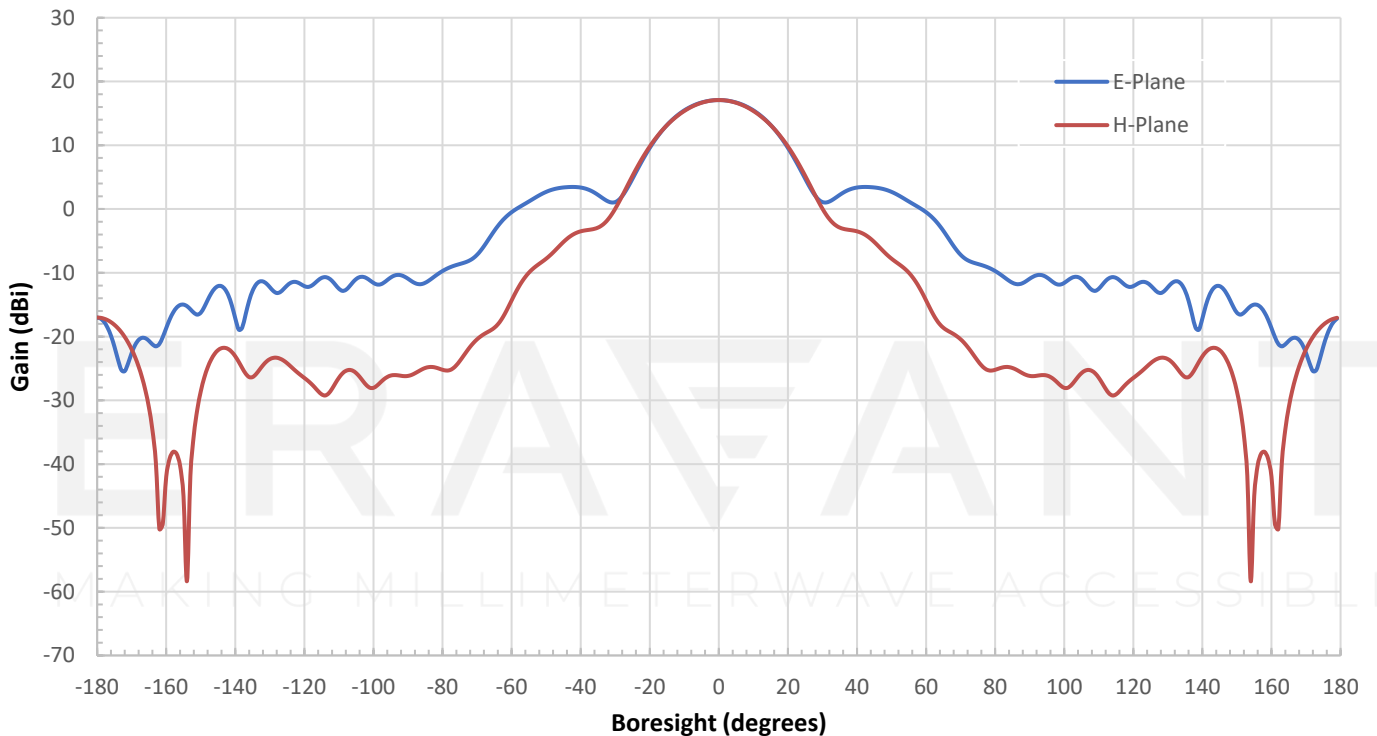


SAR-1725-15-S2

Simulated Antenna Patterns @ 75 GHz

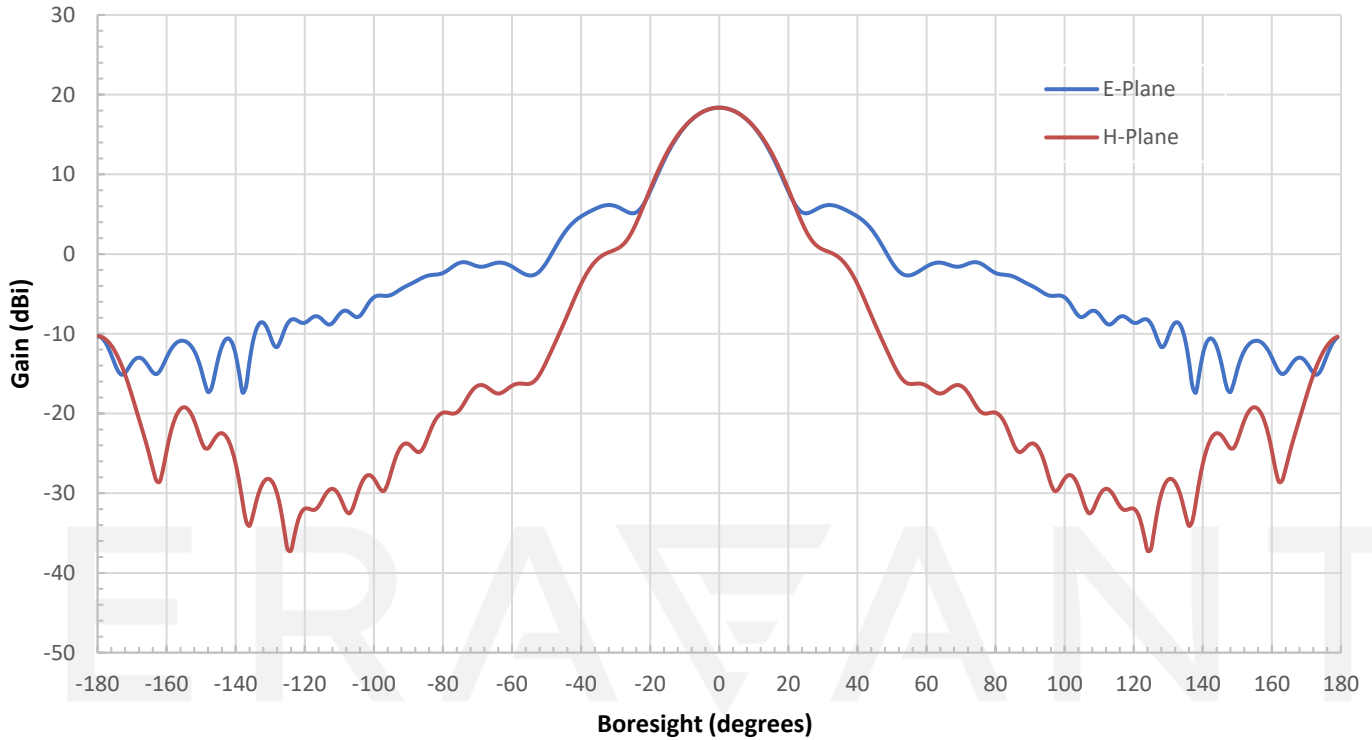


Simulated Gain vs. Frequency

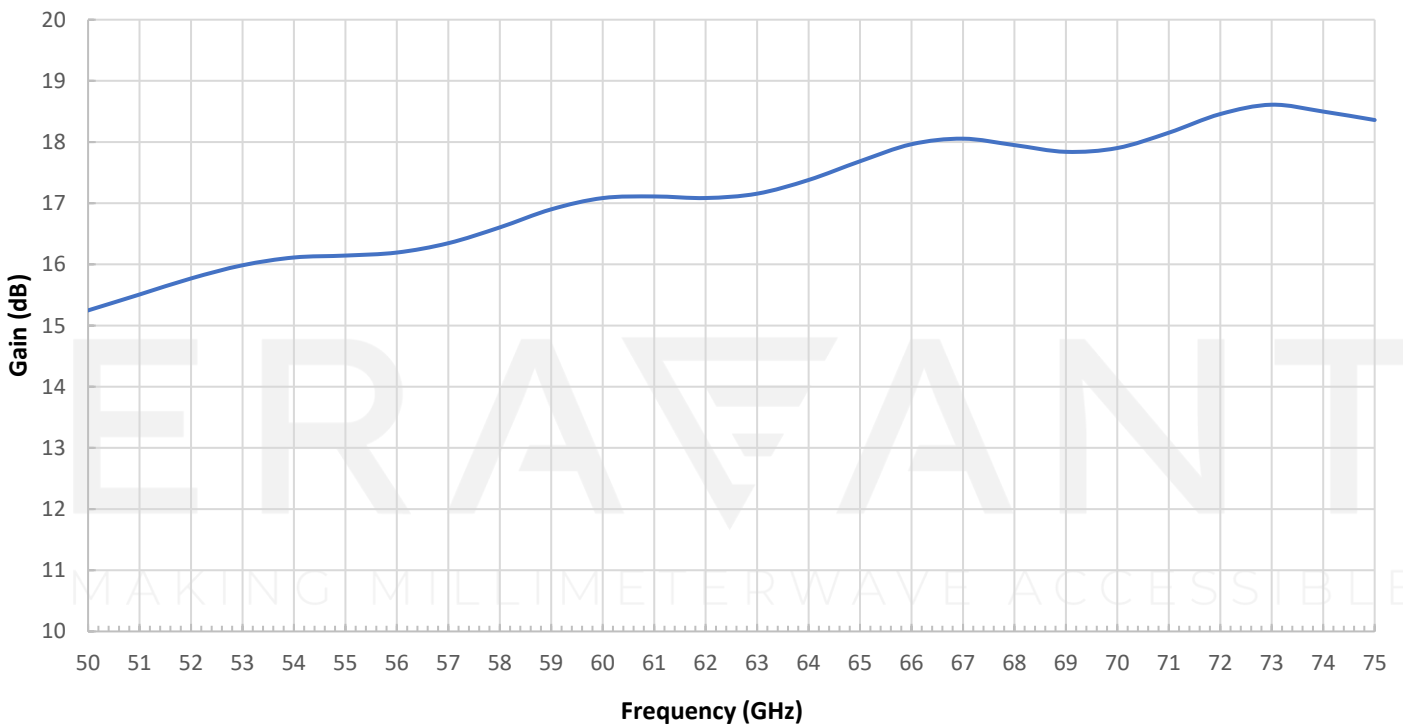


SAR-1725-15-S2

Simulated Return Loss vs. Frequency

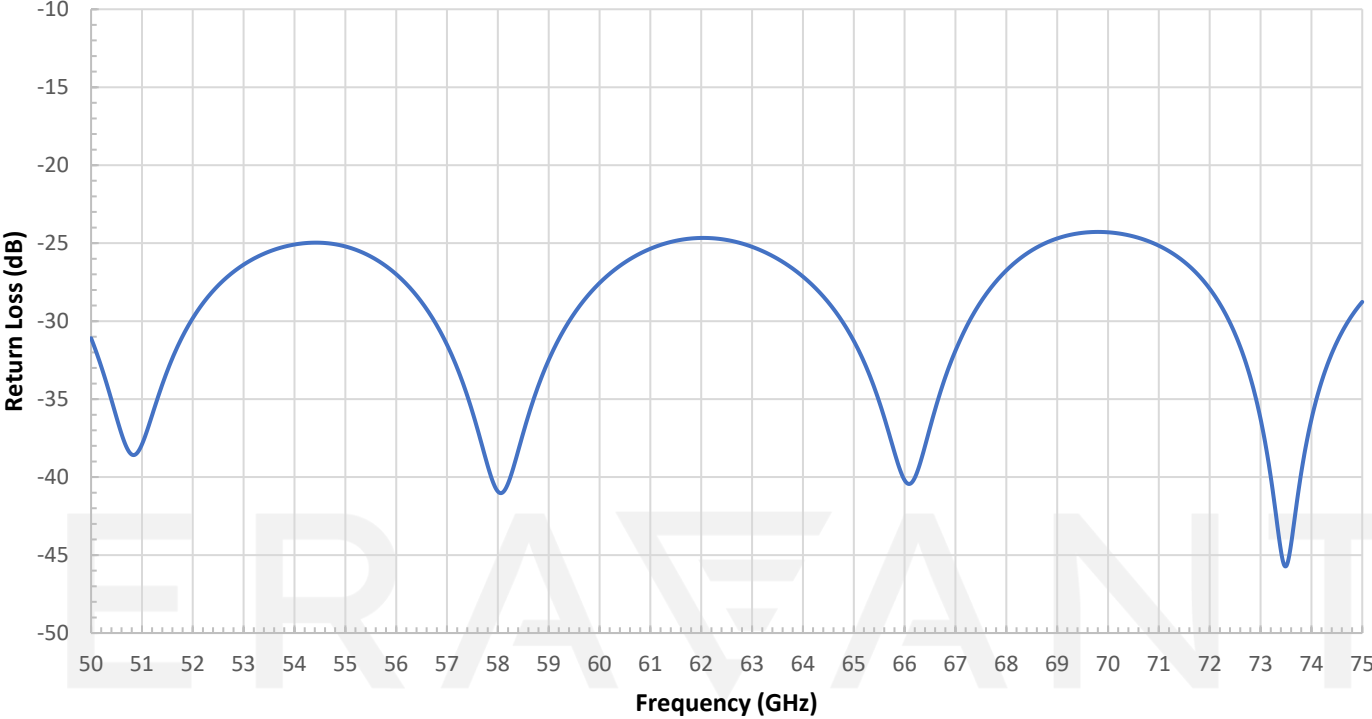

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

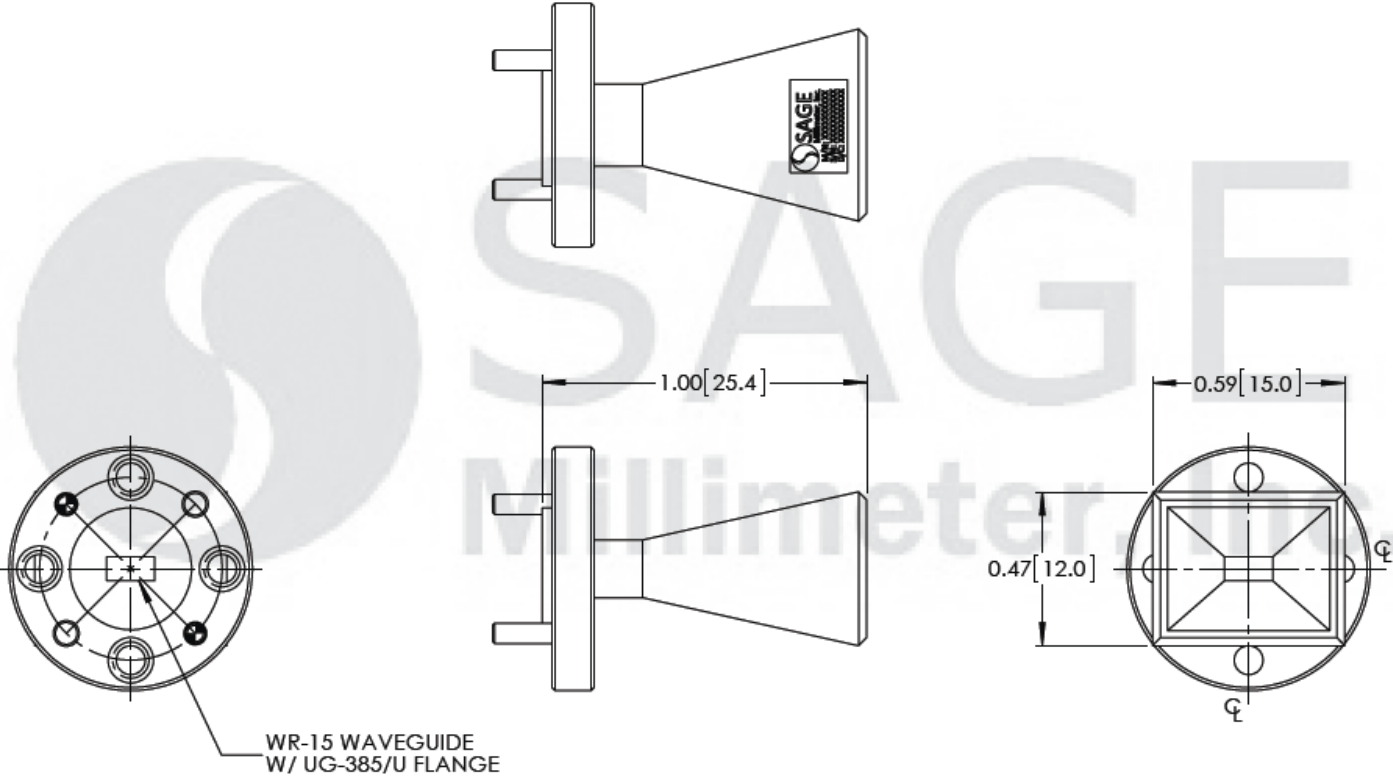

NOTE:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE